


MINIMUM BLOWOUT PREVENTER REQUIREMENTS

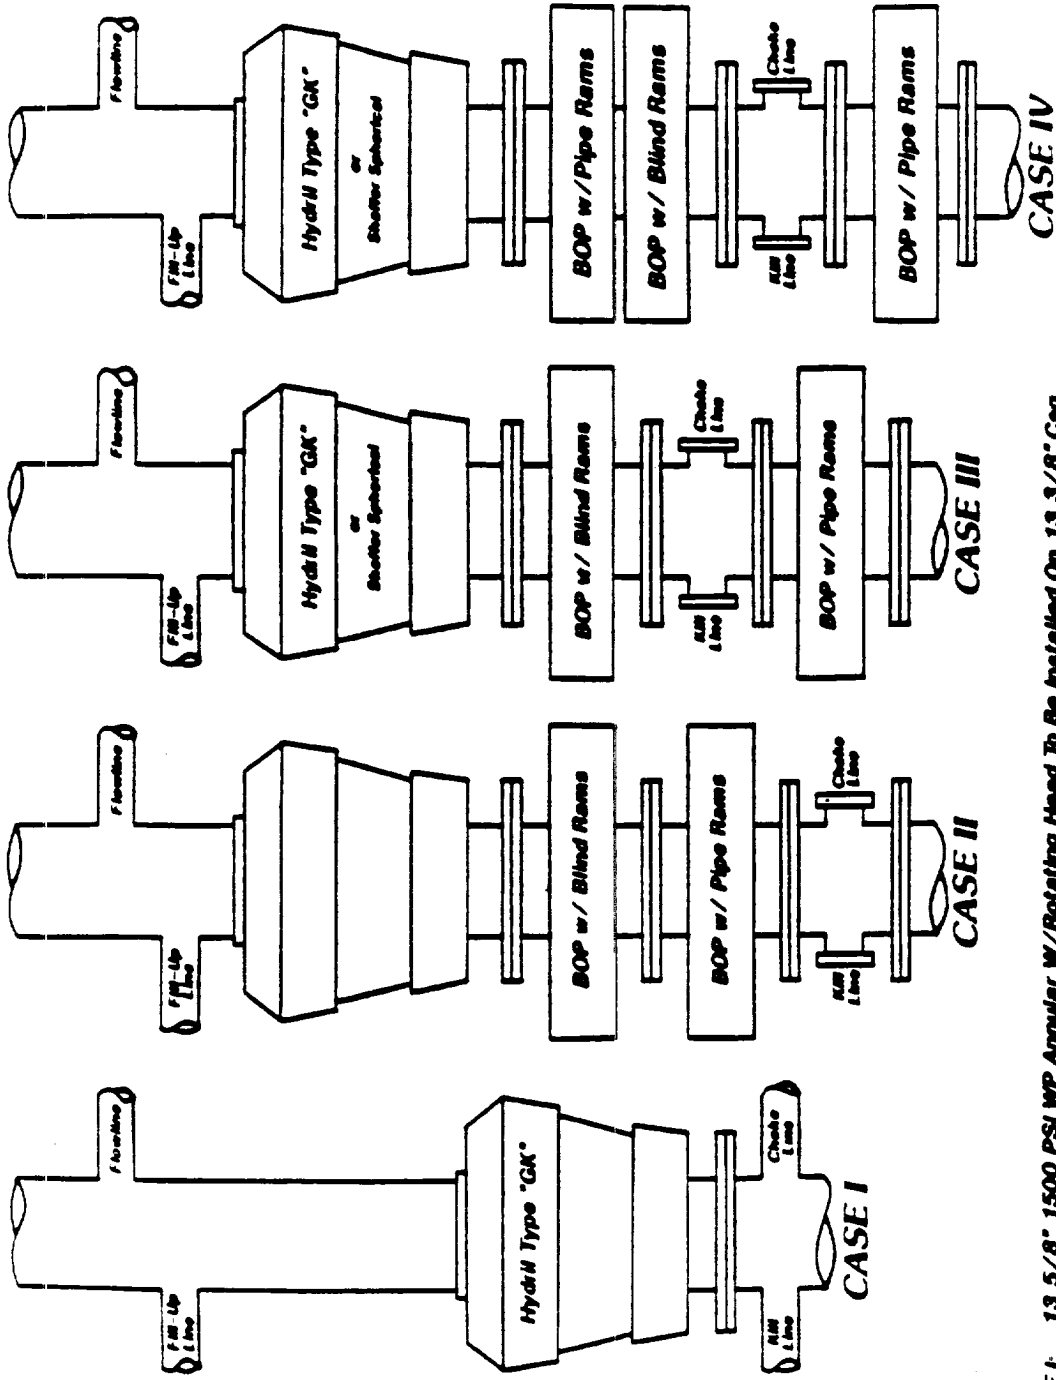

CASE I: 13 5/8" 1500 PSI WP Annular W/Rotating Head To Be Installed On 13 3/8" Csg

CASE II: 11" 5M PSI Double Rams W/3M PSI Annular To Be Installed On 9 5/8" Csg.

CASE IV: 7 1/16" 10M PSI Double Ram (Pipe On Top) Above Drilling Spool

7 1/16" 10M PSI Single Ram Below Drilling Spool

7 1/16" 5M PSI Annular W/Rotating Head

10M PSI Choke Manifold W/Remote KMI Line Connection

All To Be Installed On 7" Csg.