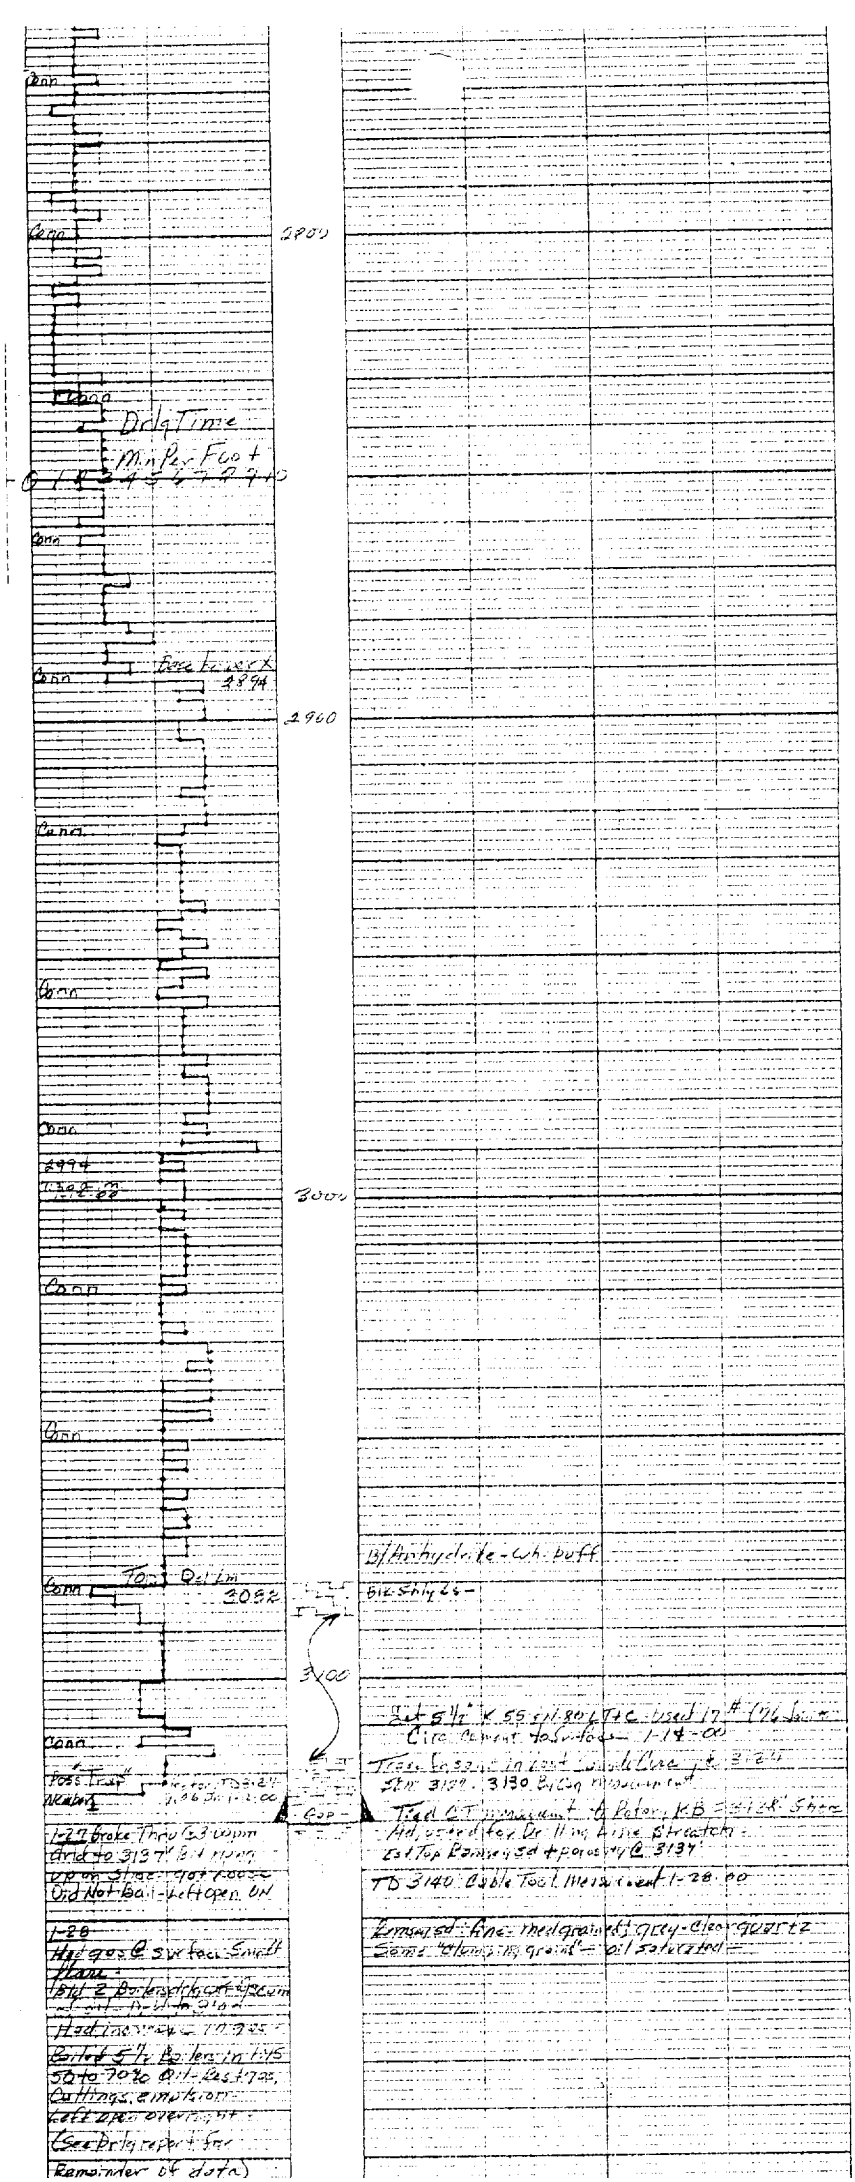
2900
Drlg Time
Min Per Foot
2960
Base Fox Sd
2994
3000
Top Qal/Tm
3052
3100
Bit Shty 26-
Bf/Hinkydale-Wh. Duff
Ld 5½" K 55 cpl 80 VTC Used 17# (14 Jts)
Circ Current to Surface - 1-14-00
Tgd CT Measurement @ Below KB = 3128' Short
Est Top Ramsey Sd + Porosity @ 3134'
TD 3140 Cable Tool Maximum - 1-28-00
Formed: fine med grained, Grey-Clear Quartz
Some "Coloring" grains - Oil Saturated
Poss Trap
Drlg Time
Gap
Ld 2 Packers with Offset
Bottom 5½ Packer in 15%
50 to 70% Oil - Gas - Trace
Cuttings, Emulsion
Left open overnight
(See Drlg report for
Remainder of data)