


DRILLING CONTROL **CONDITION V-B - 10,000 PSI WP**

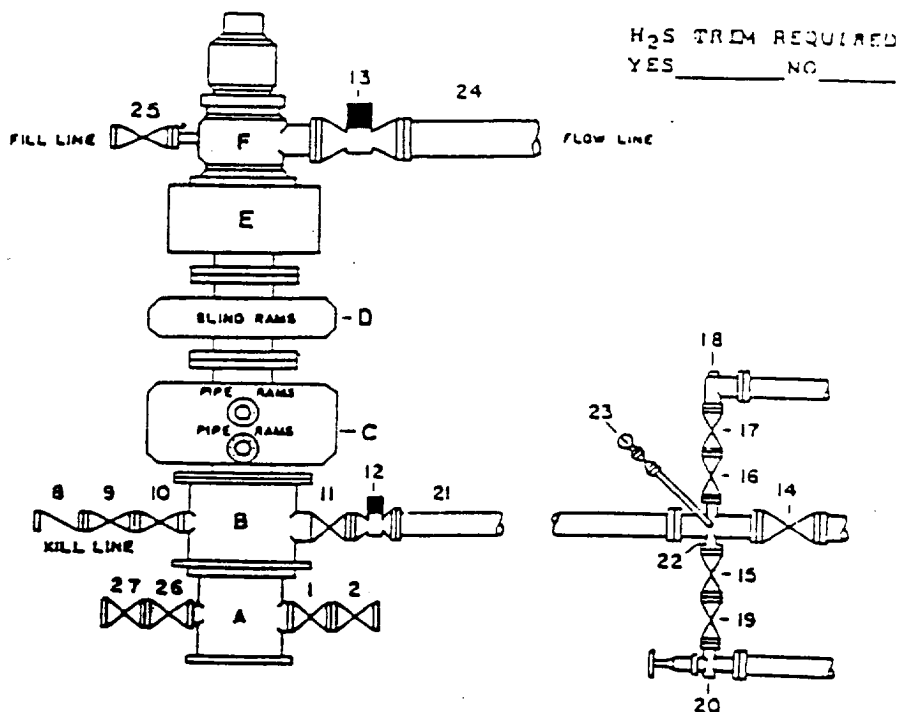

H₂S TRIM REQUIRED
 YES _____ NO _____

DRILLING CONTROL

MATERIAL LIST - CONDITION V-B

- | | |
|-------------------------------------|--|
| A | Texaco Wellhead |
| B | 10,000 W.P. Drilling Spool with a minimum 2" flanged outlet for kill line and 4" minimum flanged outlet for choke line |
| C | 10,000 W.P. Dual Variable Ram Type preventer, hydraulic operated with 1" steel, 5000 W.P. control line |
| D | 10,000 W.P. Single Ram Type preventer, hydraulic operated with 1" steel, 5000 W.P. control lines |
| E | 10,000 W.P. Annular preventer, hydraulic operated with 1" steel, 5000 W.P. control lines |
| F | <u>When required</u> - Rotating Head with fill up outlet and extended bleed line |
| 1, 2, 9, 10, 15, 16, 17, 19, 20, 27 | 2" minimum 10,000 W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve |
| 8 | 2" minimum 10,000 W.P. back pressure valve |
| 11, 14 | 4" minimum 10,000 W.P. flanged full opening steel gate valve |
| 12 | 4" minimum 10,000 W.P. flanged full opening hydraulic valve |
| 13 | <u>When required</u> - 10" minimum 1000 W.P. flanged full opening hydraulic valve |
| 21 | 4" minimum 10,000 W.P. 4130 mechanical tubing with flanged ends, or equivalent |
| 22 | 2" minimum X 4" minimum 10,000 W.P. flanged cross |
| 18 | 2" minimum 10,000 W.P. automatic choke |
| 20 | 2" minimum 10,000 W.P. adjustable choke equipped with carbide trim |
| 11 | Cameron Mud Gauge or equivalent (location in choke line optional) |
| 24 | <u>When required</u> - 10" steel flow line |
| 25 | 2" minimum 1000 W.P. flanged or threaded full opening steel gate valve or Halliburton Lo Torc plug valve |



TEXACO, INC.
 MIDLAND DIVISION
 MIDLAND, TEXAS



SCALE	DATE	EST. NO.	DRG. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			

EXHIBIT G-1