

OCD ARTESIA

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		<b>CONFIDENTIAL</b>	5. Lease Serial No. NMLC068431	
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone			6. If Indian, Allottee or Tribe Name	
2. Name of Operator BASS ENTERPRISES PRODUCTION CO		Contact: TAMI WILBER E-Mail: twilber@basspet.com	7. If Unit or CA Agreement, Name and No. NMNM04639 71016X	
3a. Address P.O. BOX 2760 MIDLAND, TX 79702		3b. Phone No. (include area code) Ph: 915.683.2277 Fx: 915.687.0329	8. Lease Name and Well No. POKER LAKE UNIT 179 1726	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNW 1980FNL 660FWL At proposed prod. zone SWNW 1980FNL 660FWL Unit E		9. API Well No. 30-015-32125		
14. Distance in miles and direction from nearest town or post office* 14 MILES EAST FROM MALAGA, NEW MEXICO		10. Field and Pool, or Exploratory UNKNOWN		
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660		11. Sec., T., R., M., or Blk. and Survey or Area Sec 8 T24S R30E Mer NMP		
16. No. of Acres in Lease		12. County or Parish EDDY		13. State NM
17. Spacing Unit dedicated to this well 40.00		18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1320		
19. Proposed Depth 7610 MD		20. BLM/BIA Bond No. on file NM2204		
21. Elevations (Show whether DF, KB, RT, GL, etc.) 3231 GL		22. Estimated duration 14 DAYS		

24. Attachments

**Carlsbad Controlled Water Basin**

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature	Name (Printed/Typed) TAMI WILBER	Date
Title AUTHORIZED REPRESENTATIVE		
Approved by (Signature) /S/ RICHARD A. WHITLEY	Name (Printed/Typed) /S/ RICHARD A. WHITLEY	Date DEC 07 2001
Title ASSOC. STATE DIRECTOR	Office NM STATE OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

**APPROVAL FOR 1 YEAR**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #6192 verified by the BLM Well Information System  
For BASS ENTERPRISES PRODUCTION CO, sent to the Carlsbad  
mitted to AFMSS for processing by linda askwig on 08/06/2001 (01LA0783AE)

**APPROVAL SUBJECT TO  
GENERAL REQUIREMENTS AND  
SPECIAL STIPULATIONS  
ATTACHED**

\*\* REVISED \*\* REVISED \*\* REVISED \*\* REVISED \*\* REVISED \*\* REVISED \*\* REVISED \*\* REVISED \*\*

**Additional Operator Remarks:**

Surface casing to be set - - 100' above the salt.

Production casing cement will be brought up at least 500' above the upmost hydrocarbon bearing zone.

Drilling Procedure, BOPE Diagram, Anticipated Formation Tops and Surface Use Plans attached.

This well is located inside the R-111 Potash Area and inside the Secretary's Potash Order, but in the barren area for potash.

There are no potash leases within 1 mile of this location.

## DISTRICT I

1025 N. French Dr., Hobbs, NM 88240

## DISTRICT II

811 South First, Artesia, NM 88210

## DISTRICT III

1000 Rio Brazos Rd., Artesia, NM 87410

## DISTRICT IV

2040 South Pacheco, Santa Fe, NM 87506

## State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102

Revised March 17, 1999

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

## OIL CONSERVATION DIVISION

2040 South Pacheco

Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

## WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code 47545	Pool Name Nash Draw (Delaware)
Property Code 001796	Property Name POKER LAKE UNIT	Well Number 179
OGRID No. 001801	Operator Name BASS ENTERPRISES PRODUCTION COMPANY	Elevation 3231'

## Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	B	24 S	30 E		1980	NORTH	660	WEST	EDDY

## Bottom Hole Location If Different From Surface



UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres 40	Joint or Infill N	Consolidation Code	Order No.
-----------------------	----------------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<b>OPERATOR CERTIFICATION</b> I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.  Signature William R. Dannels Printed Name Division Drilling Supt. Title 2 August 2001 Date	
	<b>SURVEYOR CERTIFICATION</b> I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. April 10, 2001 Date Surveyed  Signature Gary L. Jones Professional Surveyor NEW MEXICO 7977 W.O. No. 1304 Certified by Gary L. Jones 7977 PROFESSIONAL LAND SURVEYOR	

**SECTION 8, TOWNSHIP 24 SOUTH, RANGE 30 EAST, N.M.P.M.,  
EDDY COUNTY, NEW MEXICO.**

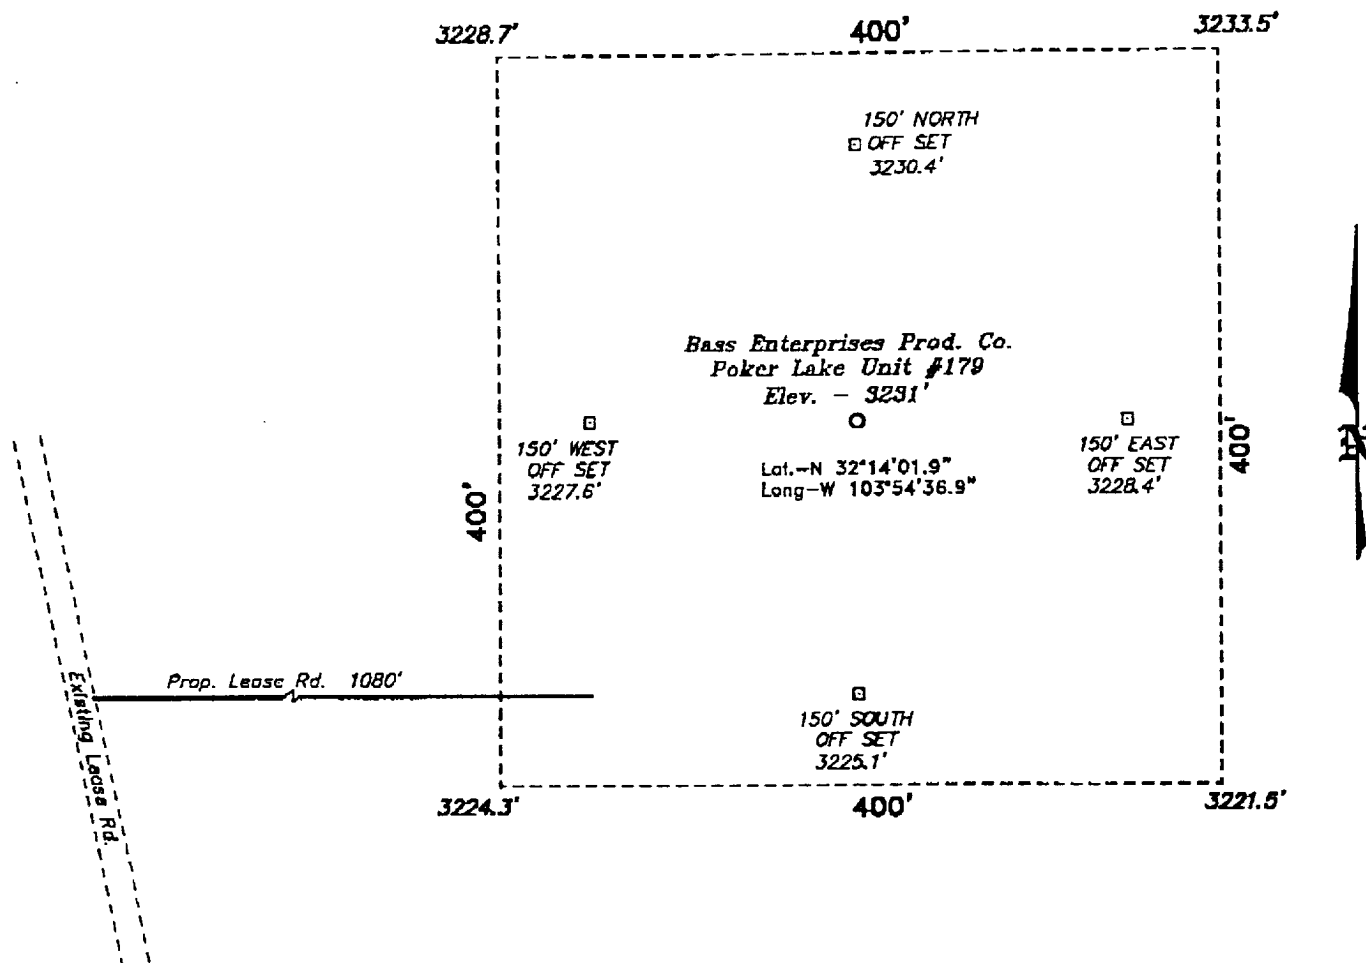

**DIRECTIONS TO LOCATION:**

FROM THE JUNCTION OF STATE HWY 128 & CO. RD.  
793, GO SOUTH AND WEST ON CO. RD. 793 APPROX.  
4.75 MILES TO A PROPOSED LEASE ROAD.

**BASS ENTERPRISES PRODUCTION CO.**

REF: Poker Lake Unit No. 179 / Well Pad Topo

THE POKER LAKE UNIT No. 179 LOCATED 1980' FROM  
THE NORTH LINE AND 660' FROM THE WEST LINE OF  
SECTION 8, TOWNSHIP 24 SOUTH, RANGE 30 EAST,  
N.M.P.M., EDDY COUNTY, NEW MEXICO.


**BASIN SURVEYS** P.O. BOX 1786-HOBBS, NEW MEXICO

W.O. Number: 1304 Drawn By: K. GOAD


Date: 04-16-2001 Disk: KJG CD#3 - 1304A.DWG

Survey Date: 04-10-2001

Sheet 1 of 1 Sheets

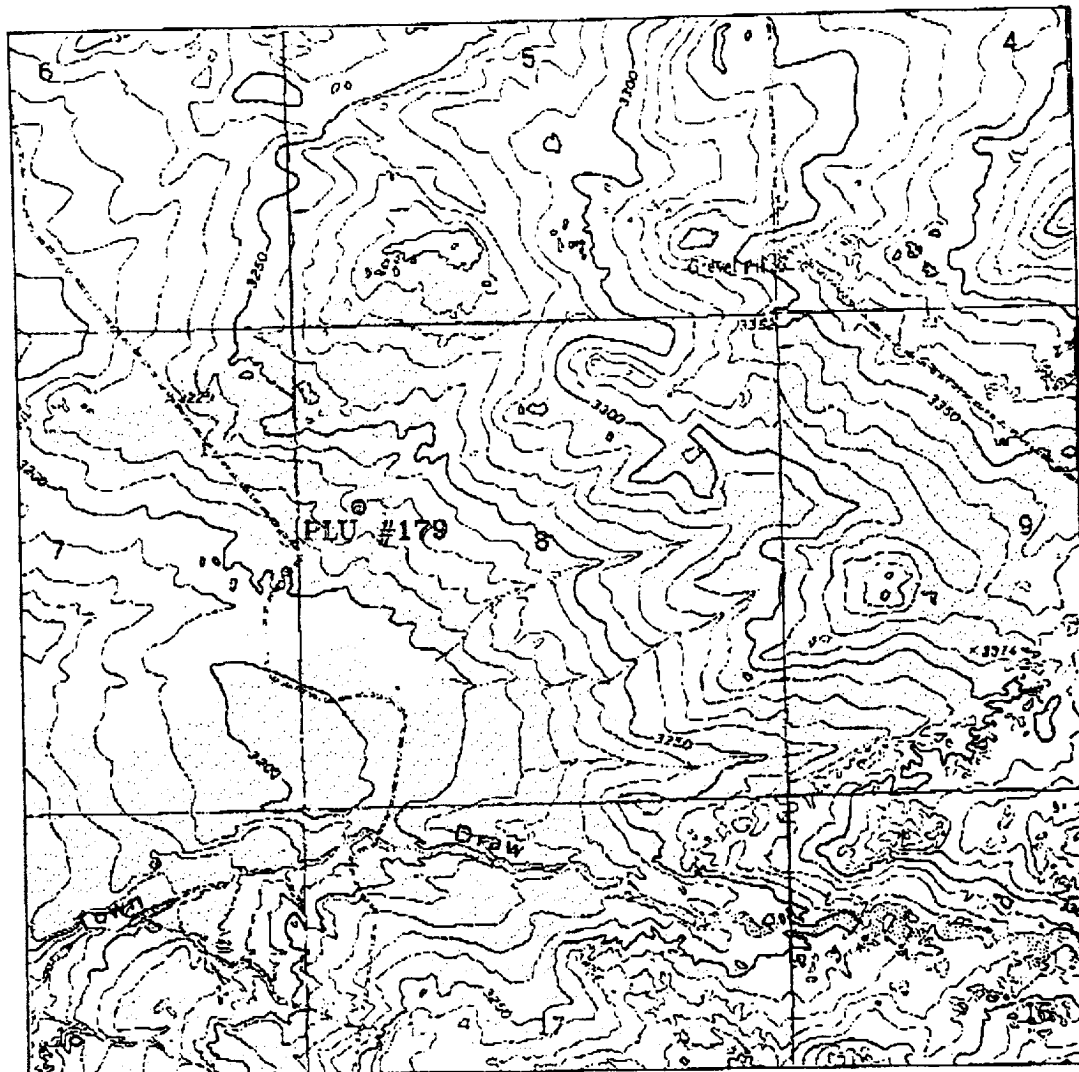**POKER LAKE UNIT #179**

Located at 1980' FNL and 660' FWL  
Section 8, Township 24 South, Range 30 East,  
N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786  
1120 N. West County Rd.  
Hobbs, New Mexico 88241  
(505) 393-7316 - Office  
(505) 392-3074 - Fax  
basinsurveys.com


W.O. Number: 1304AA - KJC CD#3

Survey Date: 04-10-2001

Scale: 1" = 2000'

Date: 04-16-2001

**BASS ENTERPRISES  
PRODUCTION CO.**

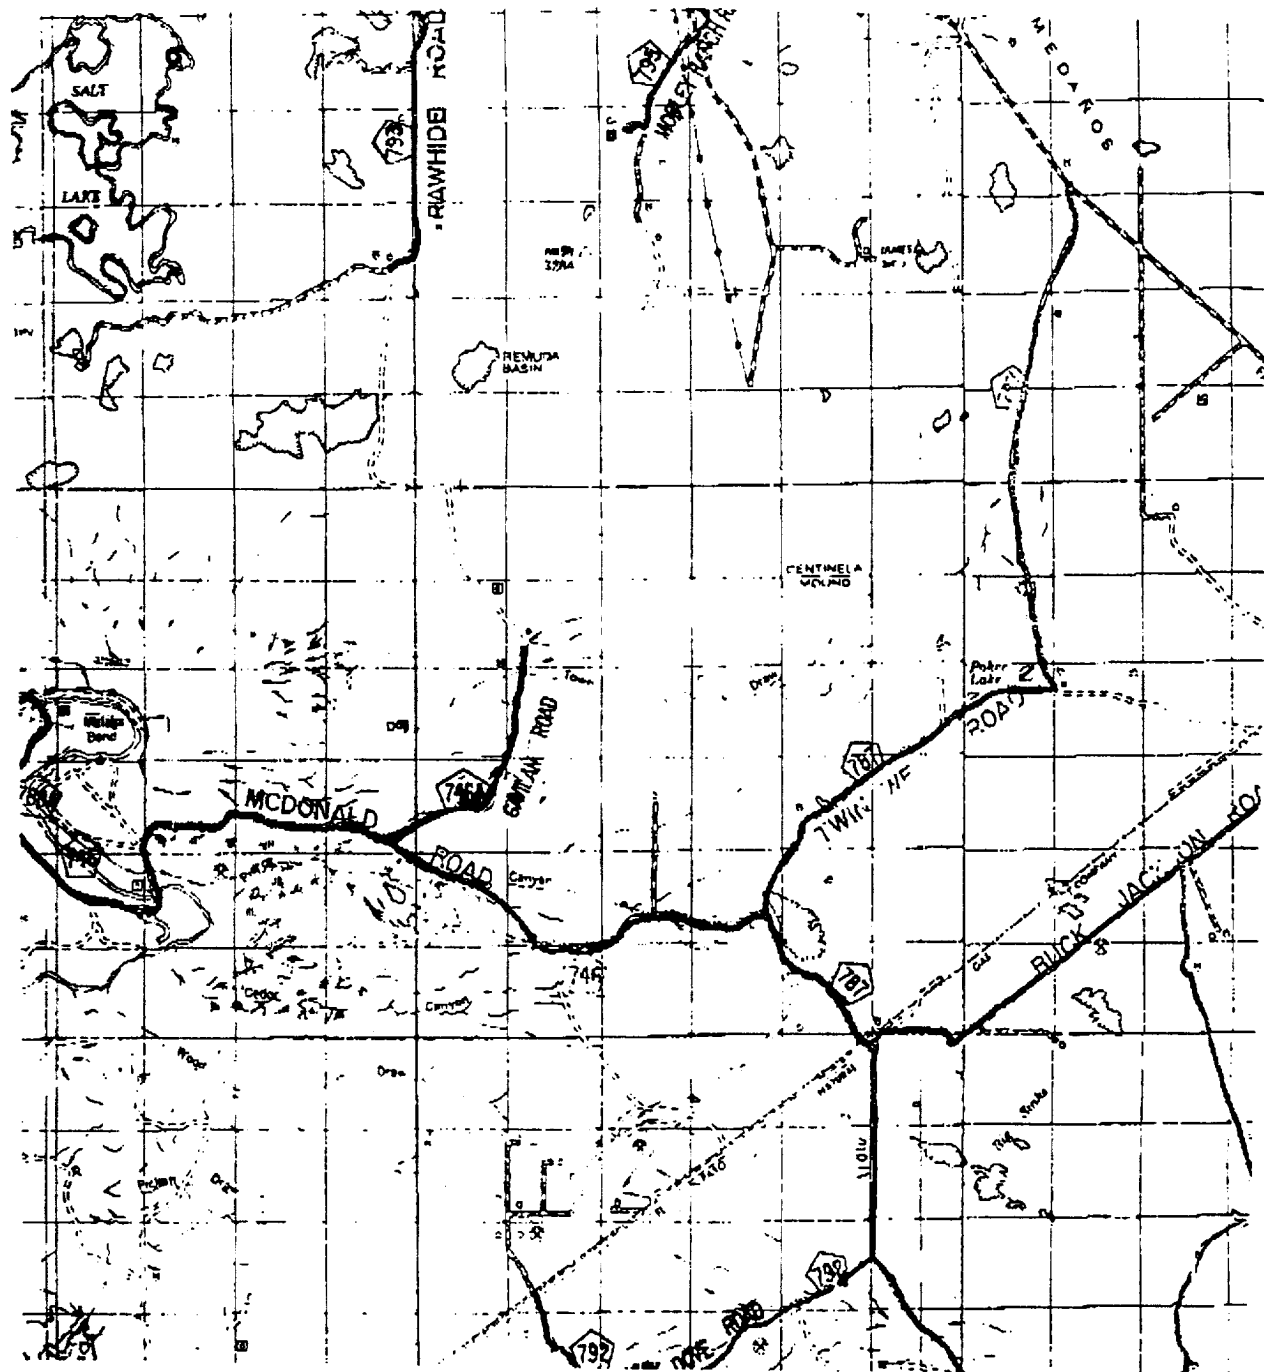

### POKER LAKE UNIT #179

Located at 1980' FNL and 660' FWL  
 Section 8, Township 24 South, Range 30 East,  
 N.M.P.M., Eddy County, New Mexico.

**basin  
surveys**

focused on excellence  
in the oilfield

P.O. Box 1786  
 1120 N. West County Rd.  
 Hobbs, New Mexico 88241  
 (505) 393-7316 - Office  
 (505) 392-3074 - Fax  
 basin-surveys.com

W.O. Number: 1304AA - KJG CD#3

Survey Date: 04-10-2001

Scale: 1" = 2 MILES

Date: 04-16-2001

**BASS ENTERPRISES  
PRODUCTION CO.**

# **EIGHT POINT DRILLING PROGRAM BASS ENTERPRISES PRODUCTION CO.**

**NAME OF WELL: Poker Lake Unit #179**

**LEGAL DESCRIPTION - SURFACE: 1980' FNL & 660' FWL, Section 8, T-24-S, R-30-E, Eddy County, New Mexico.**

## **POINT 1: ESTIMATED FORMATION TOPS**

(See No. 2 Below)

## **POINT 2: WATER, OIL, GAS AND/OR MINERAL BEARING FORMATIONS**

Anticipated Formation Tops: KB 3244' (est)      GL 3231'

<u>FORMATION</u>	<u>ESTIMATED TOP FROM KB</u>	<u>ESTIMATED SUBSEA TOP</u>	<u>BEARING</u>
T/Salt	634'	+2610'	Barren
B/Salt	3344'	- 100'	Barren
T/Lamar	3541'	- 297'	Barren
T/Ramsey Sand	3581'	- 337'	Oil/Gas
T/Lwr Brushy Canyon U Sand	7083'	-3839'	Oil/Gas
T/Lwr Brushy Canyon Y Sand	7229'	-3985'	Oil/Gas
T/Bone Spring Lime	7356'	-4112'	Barren
TD	7610'	-4366'	

## **POINT 3: CASING PROGRAM**

<u>TYPE</u>	<u>INTERVALS</u>	<u>PURPOSE</u>	<u>CONDITION</u>
16"	0' - 40'	Conductor	New
8-5/8", 24#, WC-50, ST&C	0' - 585'	Surface	New
5-1/2", 15.5#, K-55, LT&C	0' - 6500'	Production	New
5-1/2", 17#, K-55, LT&C	6500' - 7610'	Production	New

## **POINT 4: PRESSURE CONTROL EQUIPMENT (SEE ATTACHED DIAGRAM)**

Bass Enterprises recognizes that the minimum BOP equipment is a double 3000 WP BOP equivalent to Diagram 1 of this package. However, the actual BOP's used will likely exceed the minimum requirements depending on the rig the operator employs. Bass Enterprises requests a waiver to the testing requirements per Onshore Order 2. This well is located in an area Bass is familiar with and we have chosen to set only a surface casing string of 585' and drill into the low permeability rock of the Bone Spring. 70% of the internal yield of 8-5/8", 24#, WC50 ST&C is 1,750 psi. The Delaware in this area is normally pressured ( 8.4 ppg MWE ) and is not capable of flowing with a full column of fresh water. If for some reason the well does flow, we can not and will not shut the well in due to the low frac gradient at the shoe. The surface casing will only be used as a diverter. Therefore, a BOP test to indicate the BOP's are operating correctly and seal at lower pressures is all that is necessary. We intent to hydrotest the BOP stack, the choke and kill lines, Kelly cock, inside BOP, etc. to 200 psi (low) and 1,000 (high) with clear water using the rig pump. These tests will be performed:

- a) Upon installation
- b) After any component changes
- c) Fifteen days after a previous test
- d) As required by well conditions

2

A function test to insure that the preventers are operating correctly will be performed on each trip.

#### POINT 5: MUD PROGRAM

DEPTH	MUD TYPE	WEIGHT	FV	PV	YP	FL	Ph
0' - 585'	FW Spud Mud	8.5 - 9.2	45-35	NC	NC	NC	NC
585' - 5600'	Brine Water	9.8 -10.0	29-30	NC	NC	NC	10
5600' - 7610'	**	8.9 - 9.3	36-40	15	10	<100 cc	9.5 - 10

\*\* 35% diesel/65% brine emulsion

*\*Will increase vis for logging purposes only.*

#### POINT 6: TECHNICAL STAGES OF OPERATION

##### A) TESTING

None anticipated.

##### B) LOGGING

GR-CNL-LDT-AIT from TD to 8-5/8" casing shoe.  
GR-CNL from base of 8-5/8" casing to surface.

##### C) CONVENTIONAL CORING

None anticipated.

##### D) CEMENT

INTERVAL	AMOUNT SXS	FT OF FILL	TYPE	GALS/SX	PPG	FT <sup>3</sup> /SX
SURFACE:						
Lead 0 - 285' (100% excess circ to surface)	90	285	Permian Basin Critical Zone + ¼ pps Flocele	10.33	12.8	1.89
Tail 285-585' (100% excess circ to surface)	120	300	Prem Plus + 2% CaCl <sub>2</sub>	6.33	14.8	1.35
PRODUCTION: Single stage w/ Zone Seal Cement						
3081' - 7610' (+ 50% excess)						
Base Slurry	625	4529	Premium Plus + 1% Zone Seal	6.73	14.5	1.38
Consisting of		1027	Base Slurry + 300 SCF/Nitrogen	6.32	5.5	2.64
		1500	Base Slurry + 400 SCF/Nitrogen	6.32	8.9	2.01
		2002	Base Slurry + 225 SCF/Nitrogen	6.32	12.0	1.62



**E) DIRECTIONAL DRILLING**

No directional services anticipated.

**POINT 7: ANTICIPATED RESERVOIR CONDITIONS**

Normal pressures are anticipated throughout Delaware section. A BHP of 3213 psi (max) or MWE of 8.4 ppg is expected. Lost circulation may exist in the Delaware Section from 5600-7610'. No H<sub>2</sub>S is anticipated.

**POINT 8: OTHER PERTINENT INFORMATION****A) Auxiliary Equipment**

Upper and lower kelly cocks. Full opening stab in valve on the rig floor.

**B) Anticipated Starting Date**

Upon approval

14 days drilling operations

10 days completion operations

SLA

August 1, 2001

**MULTI-POINT SURFACE USE PLAN**

**NAME OF WELL: Poker Lake Unit #179**

**LEGAL DESCRIPTION - SURFACE:** 1980' FNL & 660' FWL, Section 8, T-24-S, R-30-E, Eddy County, New Mexico.

**POINT 1: EXISTING ROADS**

A) Proposed Well Site Location:

See Exhibit A and Surveyor's Plat.

B) Existing Roads:

From junction of State Highway 128 and County Road 793, go south and west on County Road 4.0 miles to lease road. Turn south on lease road 4.5 miles and turn east on caliche road for 0.2 miles.

C) Existing Road Maintenance or Improvement Plan:

See Exhibit "A".

**POINT 2: NEW PLANNED ACCESS ROUTE**

A) Route Location:

See surveyor's plat. Proposed lease road will be approximately 1080' long.

B) Width

12' wide.

C) Maximum Grade

Not applicable.

D) Turnout Ditches

Spaced per BLM requirements.

E) Culverts, Cattle Guards, and Surfacing Equipment

None.

**POINT 3: LOCATION OF EXISTING WELLS**

Exhibit "A" indicates existing wells within the surrounding area.

**POINT 4: LOCATION OF EXISTING OR PROPOSED FACILITIES**

Page 2

- A) Existing facilities within one mile owned or controlled by lessee/operator:

None..

- B) New Facilities in the Event of Production:

New facilities are proposed for the location PLU #181. A new flow line will be laid to those facilities.

- C) Rehabilitation of Disturbed Areas Unnecessary for Production:

Following the construction of production facilities, those access areas required for continued production will be graded to provide drainage and minimize erosion. The areas unnecessary for use will be graded to blend in with the surrounding topography (see Point 10)

**POINT 5: LOCATION AND TYPE OF WATER SUPPLY**

- A) Location and Type of Water Supply

Fresh water will be hauled from Diamond and Half Water Station 35 miles east of Carlsbad, New Mexico and other commercial facilities. Brine water will be hauled from Bass' Poker Lake Unit #153 or #140 batteries or commercial facilities.

- B) Water Transportation System

Water hauling to the location will be over the existing and proposed roads.

**POINT 6: SOURCE OF CONSTRUCTION MATERIALS**

- A) Materials

If not found on location, caliche will be hauled from the nearest BLM approved source.

- B) Land Ownership

Federally Owned.

- C) Materials Foreign to the Site

No construction materials foreign to this area are anticipated for this drill site.

- D) Access Roads

See Exhibit "A".

**POINT 7: METHODS FOR HANDLING WASTE MATERIAL**

Page 3

**A) Cuttings**

Cuttings will be contained in the reserve pit.

**B) Drilling Fluids**

Drilling fluids will be contained in the reserve pit.

**C) Produced Fluids**

Water production will be contained in the reserve pit.

Hydrocarbon fluid or other fluids that may be produced during testing will be retained in test tanks. Prior to cleanup operations, any hydrocarbon material in the reserve pit will be removed by skimming or burning as the situation would dictate.

**D) Sewage**

Current laws and regulations pertaining to the disposal of human waste will be complied with.

**E) Garbage**

Portable containers will be utilized for garbage disposal during the drilling of this well.

**F) Cleanup of Well Site**

Upon release of the drilling rig, the surface of the drilling pad will be graded to accommodate a completion rig if electric log analysis indicate potential productive zones. The reserve pit will be fenced only in the event livestock is present and bird netted. The fence will be maintained until the pit is backfilled. Reasonable cleanup will be performed prior to the final restoration of the site.

**POINT 8: ANCILLARY FACILITIES**

None required.

**POINT 9: WELL SITE LAYOUT****A) Rig Orientation and Layout**

Exhibit "C" shows the dimensions of the well pad and reserve pits, and the location of major rig components. Only minor leveling of the well site will be required. No significant cuts or fills will be necessary.

**POINT 9: WELL SITE LAYOUT – Cont'd...**

Page 4

**B) Locations of Pits and Access Road**

See Exhibits "A" and "C".

**C) Lining of the Pits**

The reserve pit will be lined with plastic.

**POINT 10: PLANS FOR RESTORATION OF THE SURFACE****A) Reserve Pit Cleanup**

The pits will be fenced immediately after construction only if livestock present and shall be maintained until they are backfilled. Previous to backfill operations, any hydrocarbon material on the pits' surfaces shall be removed. The fluids and solids contained in the pits shall be backfilled with soil excavated from the site and soil adjacent to the reserve pits. The restored surface of the pits shall be contoured to prevent impoundment of surface water flow. Water-bars will be constructed as needed to prevent excessive erosion. Topsoil, as available, shall be placed over the restored surface in a uniform layer. The area will be seeded according to the Bureau of Land Management stipulations during the appropriate season following restoration.

**B) Restoration Plans - Production Developed**

The reserve pits will be backfilled and restored as described above under Item A. In addition, those areas not required for production will be graded to blend with the surrounding topography. Topsoil, as available, will be placed upon those areas and seeded. The portion of the site required for production will be graded to minimize erosion and provide access during inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those that follow under Item C.

**C) Restoration Plans - No Production Developed**

The reserve pits will be restored as described above. With no production developed, the entire surface disturbed by construction of the well site will be restored. The site will be contoured to blend with the surrounding topography and provide drainage of surface water. The topsoil, as available, shall be replaced in a uniform layer and seeded according to the Bureau of Land Management's stipulations.

**D) Rehabilitation's Timetable**

Upon completion of drilling operations, the initial cleanup of the site will be performed as soon as weather and site conditions allow economic execution of the work.

**POINT 11: OTHER INFORMATION**

Page 5

**A) Terrain**

Relatively flat.

**B) Soil**

Caliche and sand.

**C) Vegetation**

Sparse, primarily grasses and mesquite with very little grass.

**D) Surface Use**

Primarily grazing.

**E) Surface Water**

There are no ponds, lakes, streams or rivers within several miles of the wellsite.

**F) Water Wells**

There are no water wells within 1 mile of location.

**G) Residences and Buildings**

None in the immediate vicinity.

**H) Historical Sites**

None observed.

**I) Archeological Resources**

An archeological survey will be obtained for this area. Before any construction begins, a full and complete archeological survey will be submitted to the Bureau of Land Management. Any location or construction conflicts will be resolved before construction begins.

**J) Surface Ownership**

The well site and new access road is on federally owned land.

**K) Well signs will be posted at the drilling site.****L) Open Pits**

All pits containing liquid or mud will be fenced only if livestock is present and bird-netted.

**POINT 12: OPERATOR'S FIELD REPRESENTATIVE**

Page 6

(Field personnel responsible for compliance with development plan for surface use).

**DRILLING**

William R. Dannels  
Box 2760  
Midland, Texas 79702  
(915) 683-2277

**PRODUCTION**

Mike Waygood  
3104 East Green Street  
Carlsbad, New Mexico 88220  
(505) 887-7329

Keith E. Bucy  
Box 2760  
Midland, Texas 79702  
(915) 683-2277

**POINT 13: CERTIFICATION**


I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in the plan are, to the best of my knowledge, true and correct; and that the work associated with operations proposed herein will be performed by Bass Enterprises Production Co. and it's contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

2 AUGUST 2001  
Date

 F-012  
William R. Dannels

SLA

# 3000 PSI WP

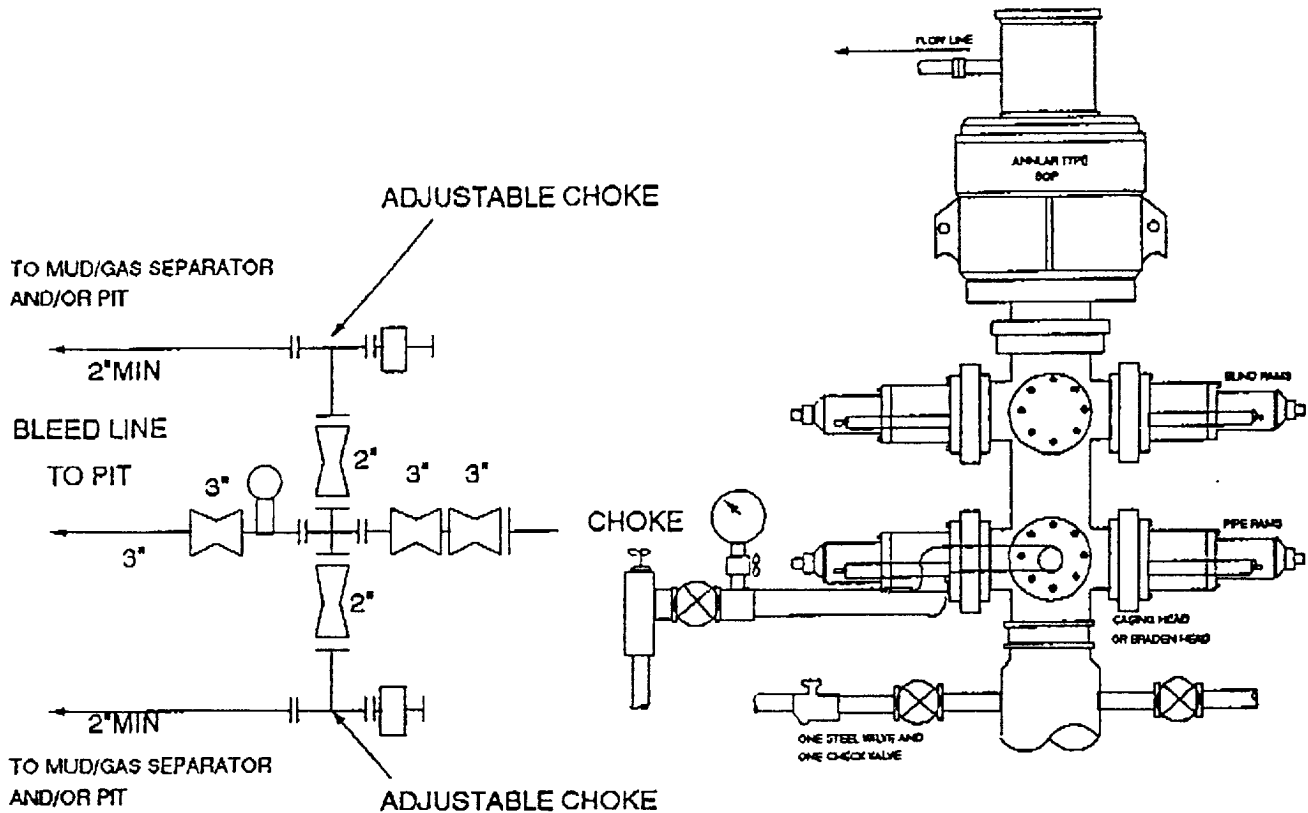

## THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS

- A. One double gate blowout preventer with lower rams for pipe and upper rams blind, all hydraulically controlled.
- B. Opening on preventers between rams to be flanged, studded or clamped and at least two inches in diameter.
- C. All connections from operating manifold to preventers to be all steel hose or tube a minimum of one inch in diameter.
- D. The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate (close, open, and re-close) the preventers.
- E. All connections to and from preventers to have a pressure rating equivalent to that of the BOP's.
- F. Manual controls to be installed before drilling cement plug.
- G. Valve to control flow through drill pipe to be located on rig floor.
- H. All chokes will be adjustable. Choke spool may be used between rams.

DIAGRAM 1



