

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator


Pogo Producing Company

3. Address and Telephone No.

P. O. Box 10340, Midland, TX 79702-7340 (915) 685-8100

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

800' FSL & 1980' FWL, Section 3, T24S, R31E



5. Lease Designation and Serial No.

M-55142

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

30-015-32477

8. Well Name and No.

Sterling Silver 3 Fed #8

9. API Well No.

10. Field and Pool, or Exploratory Area

Sand Dunes Delaware West

11. County or Parish, State

Eddy County, NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Spud
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spud & Set Surface Csg - MIRU Patterson #54. Spud well @ 16:45 hrs 11/14/02. Drld 17-1/2" hole to 773'. TD reached @ 13:30 hrs 11/15/02. Ran 17 jts 13-3/8" 48# H-40 ST&C csg. TPGS @ 773'. BJ cmt'd w/ 690 sks 35:65 POZ C @ 12.8 ppg followed by 200 sks Cl "C" + 2% CaCl2 @ 14.8 ppg. Circ 175 sks to surface. Plug down @ 19:30 hrs 11/15/02. WOC 18 hrs. Make cut-off. Weld on WH. NU BOP's & test ok.

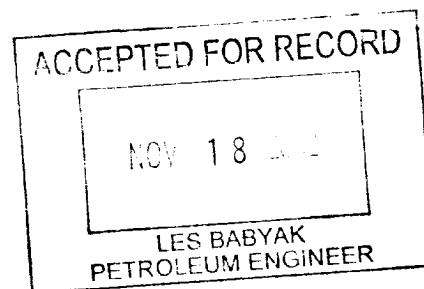

14. I hereby certify that the foregoing is true and correct

Signed *Cathy Imbert*

Title Sr. Operation Tech

Date 11/18/02

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: