

Form 9-231 C NM OIL CONS. COMMISSION
(May 1963)
Drawer DD
Artesia, N.M. 88210
**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

SUBMIT A. TRIPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1425.

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK
DRILL ☒ **DEEPEN** ☐ **PLUG BACK** ☐

b. TYPE OF WELL
OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR
Marbob Energy Corporation ✓

3. ADDRESS OF OPERATOR
P.O. Drawer 217, Artesia, N.M. 88210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements*)
At surface 1295 FSL 990 FEL

At proposed prod. zone
Same

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*
20 air miles east of Artesia, N.M. 88210

16. NO. OF ACRES IN LEASE
1480

17. NO. OF ACRES ASSIGNED TO THIS WELL
40

18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.
330'

19. PROPOSED DEPTH
4500'

20. ROTARY OR CABLE TOOLS
Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
3597.3 GR

22. APPROX. DATE WORK WILL START*
7/22/85

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	350'	Sufficient to circulate
7 7/8"	5 1/2"	15.50#	4500'	1500 sax, to base of salt

Pay zone will be selectively perforated and stimulated as needed to optimum production.

Attached are: 1. Location & acreage dedication plat
2. Supplemental drilling data
3. Surface use plan

*Posted IDI
APL & HL
8-9-85*

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED [Signature] TITLE Production Clerk DATE 7/15/85

(This space for Federal or State office use)

PERMIT NO. [Blank] APPROVAL DATE [Blank]

APPROVED BY [Signature] TITLE [Blank] DATE 7-30-85

CONDITIONS OF APPROVAL, IF ANY:

**Subject to
Like Approval
by State**

*Unorthodox
location*

*See Instructions On Reverse Side

**APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED**

**MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT**

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section


Operator MARBOB ENERGY CORP.			Lease M DODD "A"		Well No. 39
Unit Letter P	Section 15	Township 17S	Range 29E	County EDDY	
Actual Footage Location of Well: <div style="display: flex; justify-content: space-between;"> 1295 feet from the SOUTH line and 990 feet from the EAST line </div>					
Ground Level Elev. 3597.3	Producing Formation San Andres		Pool Grbg Jackson SR Qn Grbg SA		Dedicated Acreage: 40 Acres

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

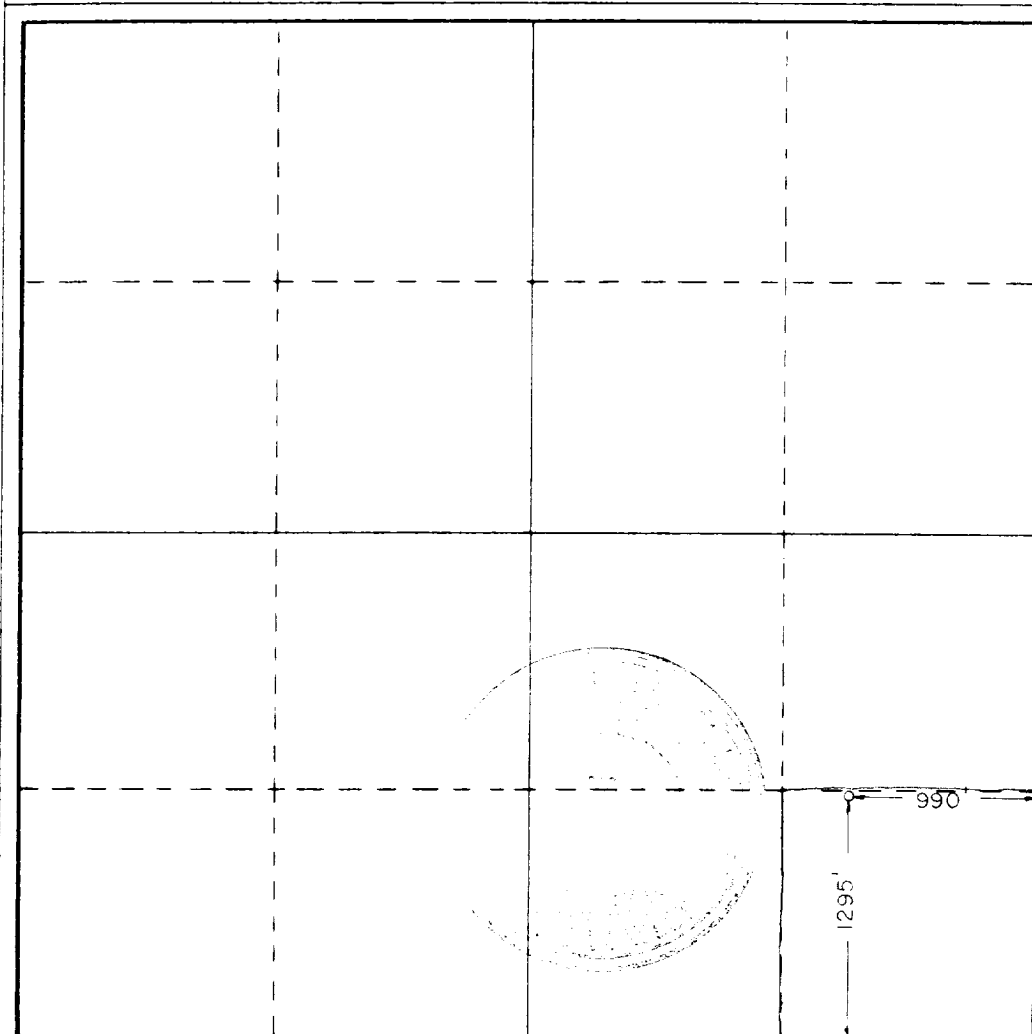

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

DeNette Morriss

Name

DeNette Morriss

Position

Production Clerk

Company

Marbob Energy Corporation

Date

7/15/85

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

5/17/85

Registered Professional Engineer and a Land Surveyor

John W. West

Certificate No. **JOHN W. WEST, 676**

RONALD J. EIDSON, 3239

REGAN OFFSHORE INTERNATIONAL, INC.

Torrance,


REGAN BLOWOUT PREVENTERS

Annular

The Regan Torus Blowout Preventer is used primarily on production and workover rigs for well control up to 3000 PSI working pressure.

DESIGN FEATURES

- a. The Torus Preventer is designed for minimum weight to facilitate its use with production and workover rigs.
- b. The rubber packer will conform to any obstruction in the well bore. Sealing ability is not affected by minor damage to the inner layer.
- c. The packer will seal on open hole at full working pressure.
- d. The dual packer design increases the reliability of the preventer where the outer rubber is never exposed to the well bore. Under ordinary service, the outer packer is rarely replaced.

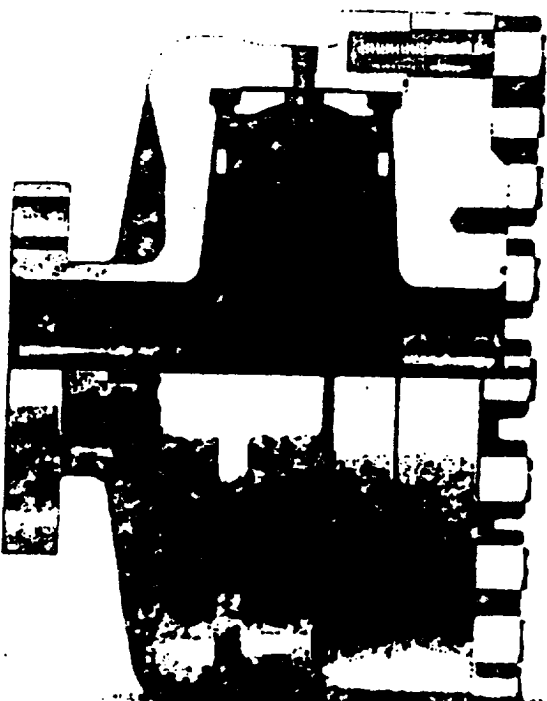

TORUS BLOWOUT PREVENTER
PATENTED

SPECIFICATIONS

DIMENSIONS (in.)						
Nominal Size	Test Pressure (psi)	Outside Diameter	End Bore	Overall Height	Weight (lb.)	End Flanges (I)
6	3000 (600)	24	2 1/8	19 1/2	140 (70)	2000 3/4
8	3000	36	3 1/8	29	265	2000 3/4

1. To be used only with Regan Torus Blowout Preventers.
2. For use with other blowout preventers, the user must consult the manufacturer's instructions.
3. The weight of the preventer is subject to change without notice.
4. The overall height is subject to change without notice.
5. The end flanges are subject to change without notice.
6. The test pressure is subject to change without notice.
7. The nominal size is subject to change without notice.

SUP Exhibit E

REGAN BLOWOUT PREVENTER
Marbob Energy Corporation
M. Dodd "A" Fed. #39
SE1/4SE1/4, Sec. 15-17S-29E

SUPPLEMENTAL DRILLING DATA

MARBOB ENERGY CORPORATION
WELL #39 M. DODD "A" FEDERAL
SE1/4SE1/4 SEC. 15-17S-29E
EDDY COUNTY, NEW MEXICO
(DEVELOPMENT WELL)

1. SURFACE FORMATION: Quaternary.

2. ESTIMATED TOPS OF GEOLOGIC MARKERS:

Salt	360'	Queen	1815'
Base Salt	780'	Grayburg	2140'
Yates	930'	San Andres	2510'
Seven Rivers	1145'	Glorietta	3900'

3. ANTICIPATED POROSITY ZONES:

Water	Above 180'
Oil	2350 - 4500'

4. CASING DESIGN:

<u>SIZE</u>	<u>INTERVAL</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>JOINT</u>	<u>CONDITION</u>
8 5/8"	0-350'	24.0#	K-55	STC	New
5 1/2"	0-4500'	15.5#	K-55	STC	New

5. SURFACE CONTROL EQUIPMENT: A double ram-type or annular BOP will be used. (See diagram attached as Exhibit "E")

6. CIRCULATING MEDIUM:

0 - 350' Fresh water mud with gel or lime as needed for viscosity control.


350' - 4500' Salt water mud, conditioned as necessary for control of viscosity and water loss or gain.

7. AUXILIARY EQUIPMENT: Drill string safety valve.

8. LOGGING PROGRAM: CNL-FDC W/GR Log will be run to TD.

9. ABNORMAL PRESSURES, TEMPERATURES OR GASES: A water flow may be encountered in the salt section.

10. ANTICIPATED STARTING DATE: It is planned that operations will commence about July 22, 1985. Duration of drilling, testing and completion operations should be one to four weeks.

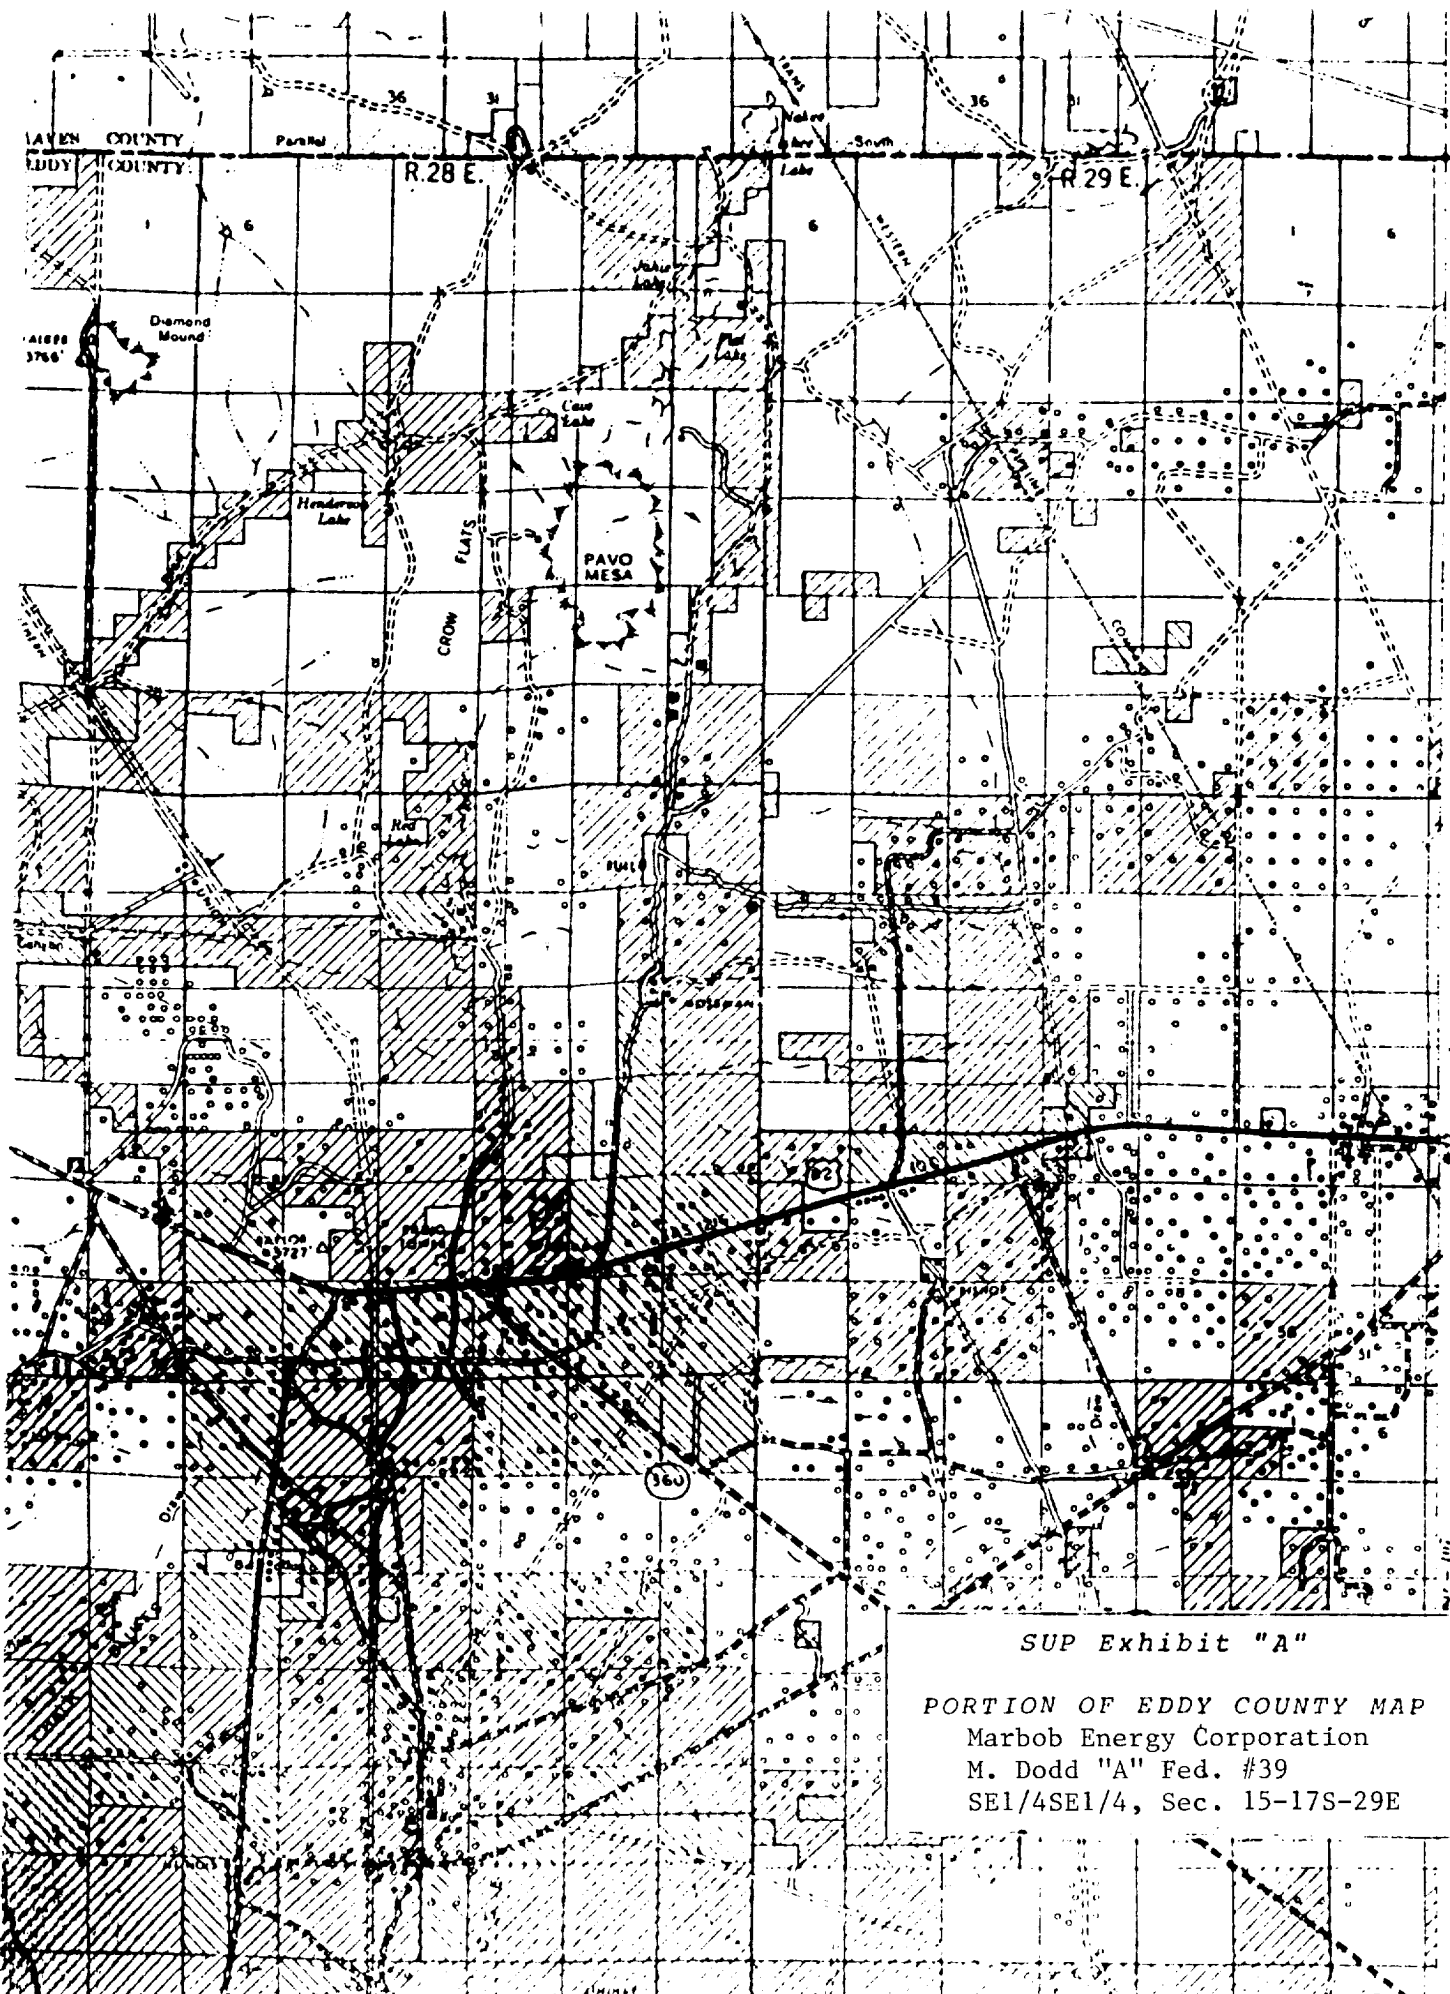

T.15 S.


T.16 S.

T.17 S.

T.18 S.

SUP Exhibit "A"

PORTION OF EDDY COUNTY MAP
Marbob Energy Corporation
M. Dodd "A" Fed. #39
SE1/4SE1/4, Sec. 15-17S-29E

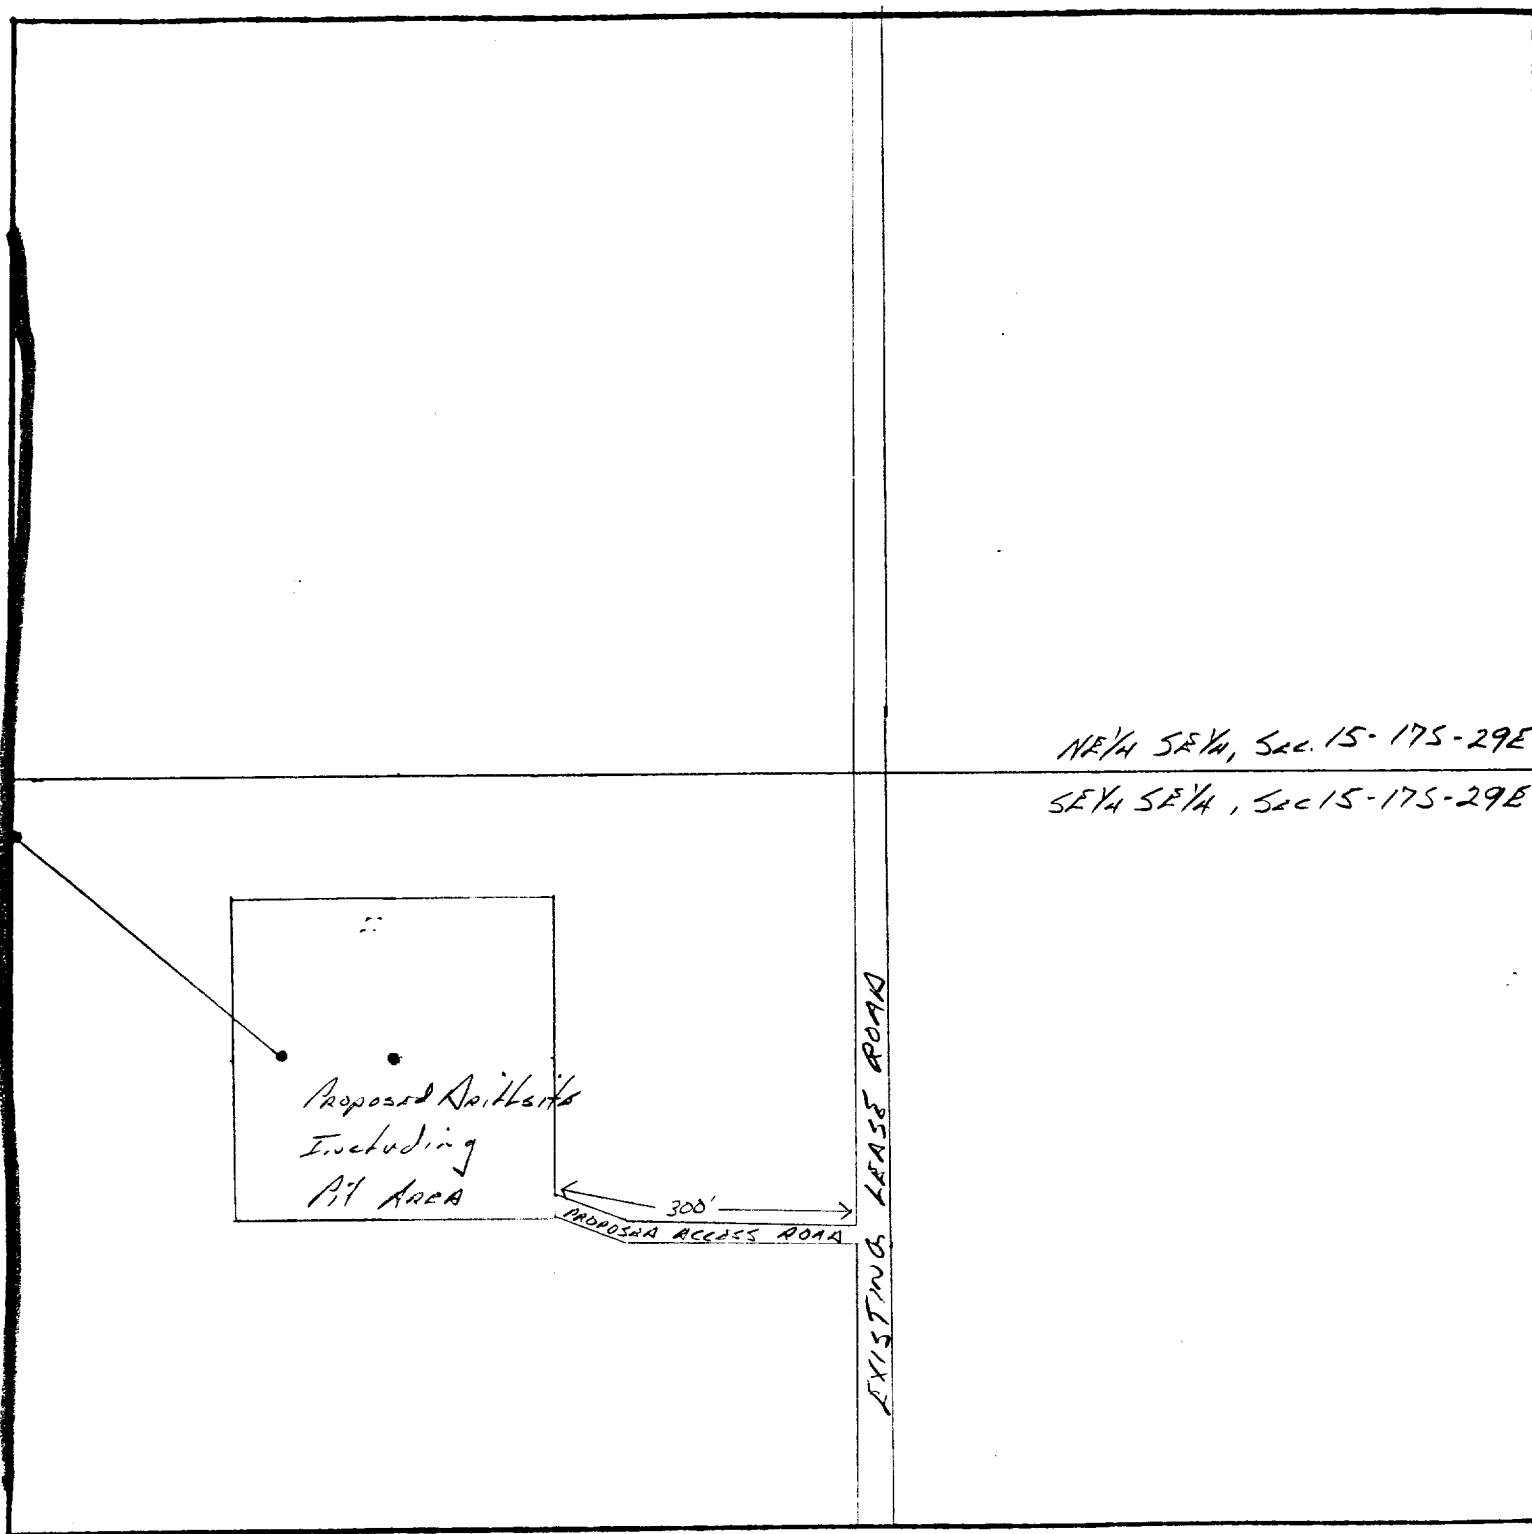

LEGEND

(1cm = 66ft)

Primary Line
Proposed Line

SUP Exhibit "E"

SKETCH OF ELECTRIC POWER LINES

Marbob Energy Corporation
M. Dodd "A" Fed. #39
SE 1/4 SE 1/4, Sec. 15-17S-29E