Form 3160—3 (November 1983) (formerly 9—331C)	DEPARTMENT BUREAU OF	EPARTMENT OF THEATA BUREAU OF LAND MANAGE		EMENT 88210		Form approved. Budget Bureau No. 1004-0136 Expires August 31, 1985 5. LEASE DESIGNATION AND SERIAL NO. LC 029388 6. IF INDIAN, ALLOTTER OR TRISE NAME		
APPLICATIO	N FOR PERMIT	TO DRILL, D	EEPEN, C	OK PLUG	RACK	· · · · · · · · · · · · · · · · · · ·		
	ILL X	DEEPEN []	PLUG BA	CK 🗆	7. UNIT AGREEMENT N	AMB	
oil X	VELL X OTHER		SINGLE -	X MULTI	PLE	8. FARM OR LEASE NA	K9	
2. NAME OF OPERATOR	VILL CAL DIAME					Stetco "10"		
Marathon Oil	Company					9. WELL NO.		
3. ADDRESS OF OPERATOR						8		
P 0 Box 55	2, Midland, TX	79702		DECENIE	_	10. FIELD AND POOL, OR WILDCAT		
4. LOCATION OF WELL (I	Report location clearly and	in accordance with	any State req	uirements.	U	X Tamano (Bone Spring)		
910° FSL & 2	030' FEL	, Γ)			11. SEC., T., E., M., OR AND SURVEY OR AL	BLK.	
At proposed prod. 30		11.0	/	1101 27 t	00			
910' FSL & 2		M	NOV 27 '90			Sec. 10, T-1	8-S, R-31-	
14. DISTANCE IN MILES	AND DIRECTION FROM NEA	REST TOWN OR POST	OFFICE*			12. COUNTY OR PARISH	13. STATE	
10 miles ESE	of Loco Hills,	NM		O. C. 1	+	Eddy	NM	
15. DISTANCE PROM PROF LOCATION TO NEARES	USED*		16. NO. OF AC	RESARTERIALO	TO TE	F ACRES ASSIGNED		
PROPERTY OR LEASE	LINE, FT. Q	10'	160					
18. DISTANCE FROM PRO	lg. unit line, if any) POSED LOCATION®				20. ROTAL	ARY OR CABLE TOOLS		
TO NEAREST WELL, OR APPLIED FOR, ON TI	DRILLING, COMPLETED, HIS LEASE, FT. *	1372'	90001		Rota	ry		
21. ELEVATIONS (Show w		1372			<u> </u>	22. APPROX. DATE WO	DEE WILL START	
	'01.6' GR				_	December 15	, 1990	
23.	1	PROPOSED CASING	AND CEME	NTING PROGE	AM			
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOO	OT SE	TTING DEPTH		QUANTITY OF CEMENT		
17-1/2"	13-3/8"	48	750	1	835 s	35 sx - circulate		
11"	8-5/8"	24 & 32	245	0'	1350	1350 sx - circulate		
7-7/8"	5-1/2"	15.5 & 17						
Propose to o	 irill to a TD of vill be run and	± 9000'.	accordan	ce with re	egulatio	ns and by		

approved methods.

Blowout prevention equipment will be applied as outlined in Additional Information. See attached Multipoint Surface Use Plan and Additional Information for specific drilling operations.

* Distance to proposed well #6

Post ID-1 12-7-98 New La + API

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive sone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED Allery	TITLE D	rilling Superintendent	DATE 10/30/90		
(This space for Federal or State office use)					
PERMIT NO.		APPROVAL DATE AREA MALABLE DARLSBAD MESCHLEIGE	11.26 9,		
APPROVED BY	TITLE		DATS		

GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS

State of New Mexico Energy, Minerals and Natural Resources De

Form C-102 Ravised 1-1-89

OIL CONSERVATION DIVISION

P.O. Box 2088 Santa Fe, New Mexico 87504-2088

DISTRICT II P.O. Deswer DD, Astonia, NM 88210

DISTRICT | P.O. Box 1980, Hobbs, NM 88240

DISTRICT III
1000 Rio Brance Rd., Aznec, NM 87410

WELL LOCATION AND ACREAGE DEDICATION PLAT

All Distances must be from the outer boundaries of the section

			TY.					Well No.	
MARATHO	N OIL CO	MPANY		Ste	tco 10 Fed	eral			3
Letter O Sec	10	Township 18	8South	31	East	NMPM	County E	ddy	
Footage Location	of Well:			203	^		- East	••	
0 feet	from the	South	line and	203		feet from		Dedicated Act	sete:
701-6	Rone	Spring		Tama	ano			40	Acres
1. Outline the	acrege dedicate	d to the subject v	vell by colored pencil	or hackurs me	arks on the plat bel	OW.			
2. If more than	con lense is do	dicated to the we	H, outline each and id	entify the own	ership thereof (bot	as to worki	ng interest and	royalty).	
			is dedicated to the w						
3. If more una unitization,	force-pooling, et	tc.?					•		
☐ Yes	s [_ o" list the owne	No If	answer is "yes" type of answer is "yes" type of iptions which have ac	of consolidatio titally been co	n seolidated. (Use n	verse side of			
			all interests have been					e. or otherwise)	
No allowable v or until a non-	will be assigned standard unit, eli	iminating such in	terest, has been appro	wed by the Div	risios.				
								OR CERTIE	
	ļ			!				certify that in in true and	
	1			i				ledge and beliq	
	i			i			ignature /		
	j			ļ			111	Itamore	
	ļ			l			Tigged Name		
			.4	 			L. Atı	nipp	
	1		ł	i		1 1	Contion	Superint	andant
	i			i			Company	Superine	endenc
	i			!				Oil Comp	any
	1					1)	30-90	
	ļ			<u> </u>					70.770
	 			! 			SURVE	YOR CERTI	FICATIO
	1			i			l hereby,	A DELE SUR	Jenn
	i		1	İ			on this flat	AND OUR	
				!			-	that the s	
				1		11		u belk()af m 676	
	ļ			i			Date Sarvine		9.1980
						}	II K	October	9,1980
			702.7;	3705.3			Signatura	W.W.W	A PART OF THE PART
	j		•		-2030'			Acres John	, -
	ļ		3699.I ^L	3702.1			7 /	, ,	
			1 7	ļ		(VALA	/11 11	
	l I		016				XVIII	NU	WEST.
								RONALD & E	IOSON,
					-				

MULTIPOINT SURFACE USE AND OPER IONS PLAN

Marathon Oil Company

STETCO "10" #8
910' FSL & 2030' FEL
Section 10, T-18-S, R-31-E
Eddy County, New Mexico
Lease: LC-029388

This plan is submitted with the Application for Permit to Drill the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of necessary surface disturbance involved, and the procedure to be followed in rehabilitating the surface after the completion of all operations so that a complete appraisal can be made of the environmental effects associated with the proposed operations.

1. Existing Roads

Exhibit "A" is a portion of a topographic map showing the location of the proposed well as staked. Proceed west from Hobbs, NM, on U.S. Highway 180. Turn west on NM Highway 529. After 31 miles, turn west on U.S. Highway 82 for 1/2 mile to Highway 222. Turn south on Highway 222 for 2 miles to caliche road, NM 249. Go east 1.3 miles. Turn N.E. on dirt road for 1.3 miles; turn west on dirt road for .5 mi., then north .1 mile. All existing roads used to access the proposed location shall be maintained in the same or better condition than presently found.

2. Planned Access Roads

A. Length and Width

An access road will not be required as the proposed location falls beside an existing road.

B. Surfacing Material

N/A

C. Maximum Grade

N/A

D. Turnouts

None Required

E. Drainage Design

Natural drainage.

F. Culverts

None required.

G. Cuts and Fills

None required.

H. Gates, Cattlegaurds and Fences

None Required.

3. Location of Existing Wells

Exhibit "B" is a map showing the location of all the wells within a one mile radius of the proposed well.

4. Location of Existing and Proposed Facilities

- A. Exhibit "C" is a map of the existing roads with the proposed well location.
- B. In the event of a producible oil well, oil will be stored at the battery location on the Stetco "10" #8 pad with production metered at the location. The gas will be piped to existing flow lines in a manner to be determined at a later date.

Location and Type of Water Supply

Water will be furnished and trucked by a Contractor.

6. Source of Construction Materials

Caliche for surfacing the drilling pad and access road will be obtained from a pit in the NW/4, SW/4 and NE/4 of the NW quarter section of Section 15, T-18-S, R-31-E. This area has been cleared for construction by the following archaeological clearance numbers, #85-195, #85-345.

7. Methods of Handling Waste Disposal

- A. Drill cuttings will be disposed of in the drilling pits.
- B. Drilling fluids will be vacuumed from the reserve pit and hauled to an approved disposal well. Reserve pit contents will be allowed to dry and pitwalls backfilled. All areas of the pad and reserve pit not necessary to production will be re-contoured. Top soil will be redistributed and reseeded with the recommended seed mixture.

- C. Water produced during tests will be disposed of in the drilling pits and hauled to an approved salt water disposal well.
- D. Current laws and regulations pertaining to the disposal of human waste will be complied with.
- E. Trash, waste paper, garbage, and junk will be stored in a trailer on location and hauled to an approved disposal site.
- F. All trash and debris will be removed from the wellsite within 30 days after finishing drilling and completion operations.

8. Ancillary Facilities

None required.

9. Wellsite Layout

Exhibit "D" shows the relative location of the rig components and reserve pits.

10. Plans for Restoration of Surface

- A. After finishing drilling and completion operations all equipment and other materials not necessary for operations will be removed. Pits will be filled and leveled and the location cleaned of all trash and junk to leave the wellsite in an aesthetically pleasing condition as is possible.
- B. Any unguarded pits containing fluids or trash will be fenced until they are filled or leveled.
- C. After abandonment of well, equipment will be removed, the location will be cleaned, and the pad and access road will be ripped and returned to as near the original appearance as is possible.
- D. In the event of a producer, the land not necessary for production operations will be re-contoured and seeded with the recommended mixture submitted by the BLM.

11. Other Information:

A. Topography

The location is situated on a duned landform.

B. Soil

Typic Torripsamment subgroup.

Multipoint Surfac. Use and Operations Plan Page 4

C. Flora and Fauna

The vegetation cover consists of native range grasses with yucca plants, cactus and mesquite. Wild life in the area includes rabbits, dove, quail, and other inhabitants typical of semi-arid climate.

D. Ponds and Streams

Local drainage in this area is internal.

E. Residence and Structures

None nearby.

F. Archaeological, Historical and Cultural Sites

None observed in the area. The Archaeological Inspection Report is being forwarded by Archaeological Consultants, Inc.

G. Land Use

Grazing with hunting in season.

H. Surface Ownership

The proposed wellsite is on land owned by the Federal Government.

12. Operators Representative

Stanley L. Atnipp P. O. Box 552 Midland, TX 79702 (915) 682-1626

13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist, that the statements made in this place are, to the best of my knowledge true and correct; and, that the work associated with the operations proposed herein will be performed by Marathon Oil Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

S. L. Atnipp

Drilling Superintendent

10-30-90 Date

13/10269001/P4

MARATHON OIL COMPANY

STETCO "10" #8 ADDITIONAL INFORMATION Comply with Order 1

In conjunction with Form 9-331C, Application to drill subject well, Marathon Oil Company submits the following items of information in accordance with BLM requirements:

Geological Name of Surface Formation 1.

Quaternary Alluvium

Estimated Tops of Important Geological Markers 2.

810′	Delaware	4850′
1990'	Bone Spring	5630 ′
	1st Sand	76 1 0′
	2nd Carb	7850 <i>'</i>
- · · · ·		8140'
 -		8820'
4275 <i>'</i>		
	1990' 2095' 2465' 3310' 3825'	1990' Bone Spring 2095' 1st Sand 2465' 2nd Carb 3310' 2nd Sand 3825' 3rd Carb

Estimated Depths of Anticipated Water, Oil or Gas Bearing Formations 3.

Yates (water) Seven Rivers (water) Queen (water & oil) Grayburg (water & oil) San Andres (water & oil) Delaware (water & oil)	2095' 2465' 3310' 3825' 4275' 4850'	Bone Spring 1st Sand (water & oil) 2nd Carb (water & oil) 2nd Sand (water & oil) 3rd Carb (water & oil)	5630' 7610' 7850' 8140' 8820'
---	--	---	-------------------------------

Casing and Cementing Program 4.

Cement to surface with 835 sxs Class 13-3/8" Surface to 750': "C" with 2% CaCl

Cement to surface with 1100 sxs 8-5/8" Intermediate to 2450':

Modified Lite followed by 250 sxs

Class "C" with 2% CaCl

Cement to 2200' with 1500 sxs Class 5-1/2" Production to 9000':

"H" PozMix. Stage tool @ ± 7400'

Pressure Control Equipment (Exhibit E) 5.

13-5/8" 3000 psi working pressure 13-3/8" Surface: annular preventer tested to 2000 psi

> 13-5/8" 3000 psi working pressure pipe and blind rams tested to 3000 psi

Additional Information Page 2

8-5/8" Intermediate:

11" 3000 psi working pressure annular preventer tested to 2000 psi

11" 3000 psi working pressure pipe rams and blind rams tested to 3000 psi Choke manifold tested to 3000 psi

6. Proposed Mud Program

0 - 750 Native; Mud Wt: 8.3 - 9.2, Viscosity 28-34 Sec

750 - 2,700 Brine Water; Mud Wt: 9.0 - 10.0, Viscosity 28-32 Sec

2,700 - 7,000 Fresh Water; Mud Wt: 8.6 - 8.8, Viscosity 28-32 Sec

7,000 - 9,000 Fresh Water; Mud Wt: 8.8 - 9.2, Viscosity 32-44 Sec

7. Auxiliary Equipment

A safety valve and subs to fit all strings will be kept on the floor at all times. An upper kelly cock valve will be utilized with the handle available on the rig floor.

8. Testing, Logging, and Coring Programs

A. Coring Program:

None anticipated.

B. Testing Program:

None anticipated.

C. Logging Program:


TD-Surface - GR-DIL, GR-LDT-CNL, TD-TOP of Bone Spring, GR-LSS, NGT, DLL-MSFL.


9. Abnormal Pressures, Temperatures or Potential Hazards


None anticipated

10. Anticipated Starting Date

As soon as possible

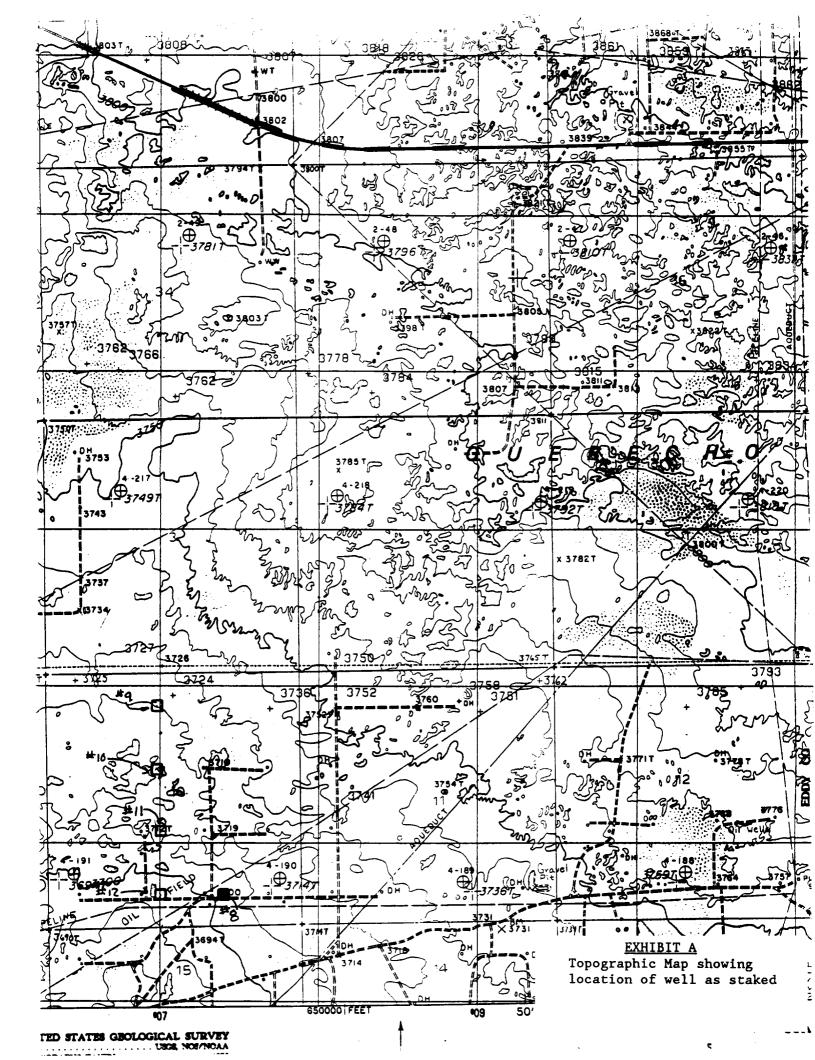

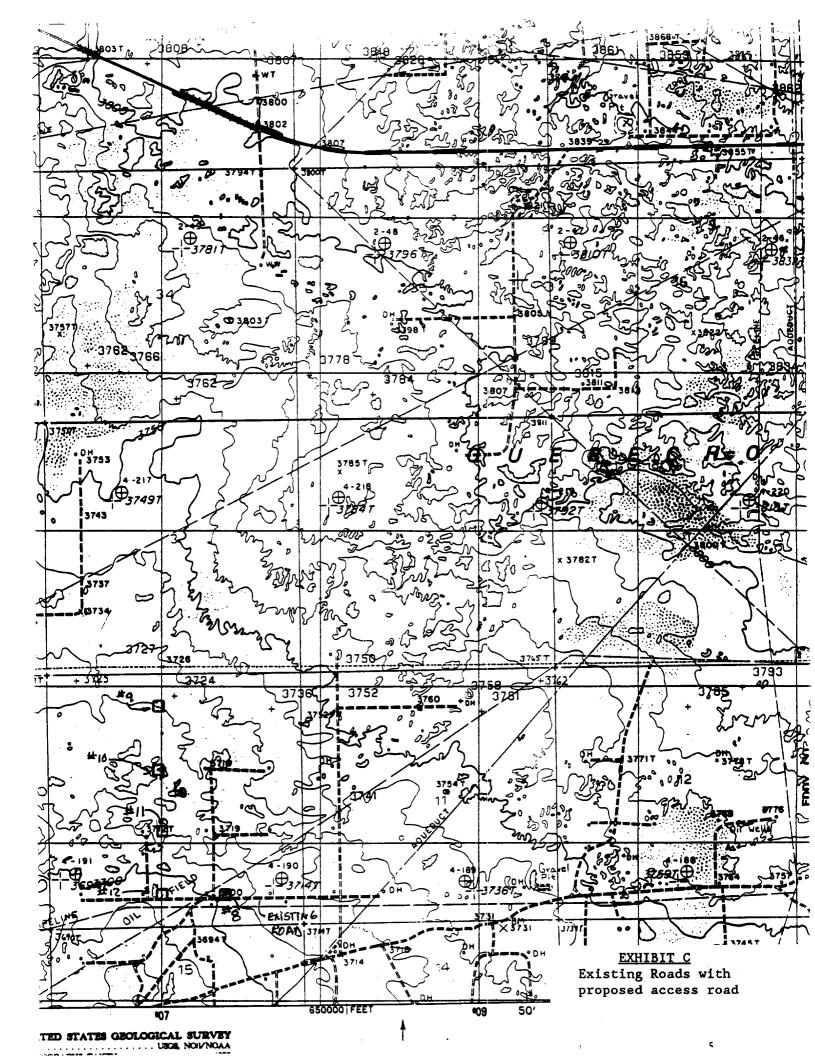

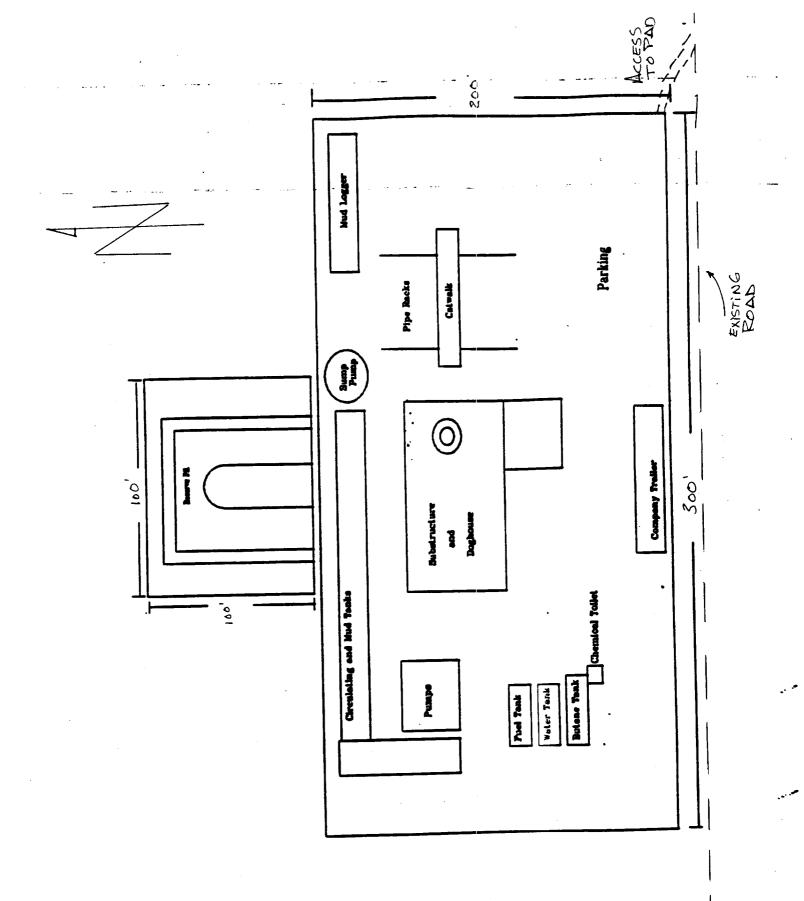

 $\frac{EXHIBIT\ D}{Relative\ location\ of\ rig}$ components δ_i reserve pit

