APPLICATION	NDEPARTMENT BUREAU OF				side)	Budget Bureau No. 1004-0136 Expires August 31, 1985 5. LEASE DESIGNATION AND SERIAL NO. LC 029388 6. IF INDIAN, ALLOTTES OR TRIBS NAME
La. TYPE OF WORK DRII	LL 🛛	DEEPEN [PLUG BA	ACK 🗌	7. UNIT AGREEMENT NAME
b. TYPE OF WELL			SI	NGLE . MUL	TIPLE	Voluntary 8. FARM OR LEASE NAME
OIL X GA WELL X WI 2. NAME OF OPERATOR	ELL OTHER		zo		<u> </u>	Stetco "10"
Marathon Oil	Company					9. WELL NO.
3. ADDRESS OF OPERATOR	00			REC	EIVED	10 10. FIRLD AND POOL, OR WILDCAT
P. O. Rox 552	, Midland, TX	79702	h any S	tate requirements.*)		Y Tamano (Bone Spring)
At surface		I III accordance wit			27 '90 <i>"</i>	11. SBC., T., E., M., OR BLE. AND SURVEY OR AREA
1980' FNL & 2 At proposed prod. son		vit.	T	NUV	<i>L1</i> 90	AND BUSTAL ON ASSA
1980' FNI. & 2	310' FWL	W ·	<u> </u>		C. D	Sec. 10, T-18-S, R-31-E
14. DISTANCE IN MILES	AND DIRECTION FROM NEA		T OFFICI	ARTESI	A, OFFICE	
10 miles ESE	of Loco Hills,	NM	16. NO	. OF ACRES IN LEASE	17. NO.	Eddy NM
15. DISTANCE FROM PROPU LOCATION TO NEAREST PROPERTY OR LEASE L	ľ	980 '	10.	160	40	rhis wall
(Also to nearest drig	g. unit line, if any)		19. PR	OPOSED DEPTH		ARY OE CABLE TOOLS
TO NEAREST WELL, DOR APPLIED FOR, ON THE	RILLING, COMPLETED,	1220'	9	000'	R	Rotary
21. ELEVATIONS (Show who						22. APPROX. DATE WORK WILL START
3714' GR						December 15, 1990
23.		PROPOSED CASI	NG ANI	CEMENTING PROC	GRAM	
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER	тоот	SETTING DEPTH		QUANTITY OF CEMENT
17-1/2"	13-3/8"	48		750'		sx - circulate
11"	8-5/8"	24 & 32		2450'		sx - circulate
7-7/8"	5-1/2"	15.5 & 17		9000'	1500	SX
All casing wi	ention equipmen Multipoint Sur	cemented in	nnlie	ed as outlined	l in Add:	itional Information.
* Distance to	o proposed well	#11		0 /		To an an an
ΔΡΟΦΩΝΑΙ	SUBJECT TO			Part :		Ο
	REQUIREMENTS AND	1		12 - 2	=	F S M
	TIPULATIONS	•		Member	+AP.	<i>⊢</i>
ATTACHED				, , , , ,	- • -	
IN ABOVE SPACE DESCRIB zone. If proposal is to preventer program, if as	s PROPOSED PROGRAM: I	f proposal is to denaily, give pertinen	epen or at data	plug back, give data o on subsurface location	on present prosent and measure	oductive some and proposed new productive red and true vertical depths. Give blowout
24.	things	т	ITLE D	rilling Super	intenden	DATE 10/30/90
(This space for Fed	leral or State office use)				. 	
(Amin upart are a to				APPROVAL DA'TE		
PERMIT NO.		 	аф (6)	A BOUNDARY ORS	p	11 26 90
CONDITIONS OF APPRO	WAL, IP ANY :	Т	ITLS	· · · · · · · · · · · · · · · · · · ·		DATE

Submit to Appropriate District Office State Lease - 4 copies Fee Lease - 3 copies

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-102 Revised 1-1-89

OIL CONSERVATION DIVISION

P.O. Box 2088 Santa Fe, New Mexico 87504-2088

DISTRICT II P.O. Drawer DD, Artesia, NM 88210

DISTRICT I P.O. Box 1980, Hobbs, NM 88240

WELL LOCATION AND ACREAGE DEDICATION PLAT

			om the outer boundar		Well No.	
MARATHON	OIL COMPANY			Federal		10
Mer Section	Township 18	South	31 East		County Eddy	
F		South	- J1 Ed3t	NMPM	1	
Postage Location of W	\$7 4 1.	line and	2310	feet from	the West line	
1980 feet from	Producing Formation	line and	Pool	1000 1.0110	Dedicated /	Acreege:
3714.2	Bone Spring		Tamano		40	Acre
2. If more than one unitization, force Ven 2. If more than one unitization, force Ven	□ No If	l, outline each and is is dedicated to the v	dentify the ownership if well, have the interest of consolidation	hereof (both as to working	idated by communitization,	
	at the owners and tract descri	ptions which have a	ctually been consolidate	ed. (Use reverse side of		
this form if necess No allowable will	he sesioned to the well until a	il interests have been	s consolidated (by con	munitization, unitization	, forced-pooling, or otherwi	ss)
or until a non-stan	lard unit, eliminating such int	erest, has been appr	oved by the Division.			
	ī —		i		OPERATOR CERT	
			i		I hereby certify the contained herein in true a	u ine inf nd complet
	i		i		est of my incoviedge and be	
			İ	-	ignature	
	980		I		Matte	1
	6		!		rinted Name	
	<u> </u>	4			S. L. Atnipp	
	!		l I	1 1	Position	-
		1	1		Drilling Superi Company	ntende
	3713.4	317.4	i	1 1	Marathon Oil Co	mpany
2310'-	i 	!	İ		Date / /	
	3710.4	i3 15.2	I		10/30/90	
	1	ļ	!	1 [SUPPLEXOR CER	TACAT
	<u> </u>				nested denily that the	
	ļ		l t			from fleid
					acted Seys made by	ME 15
	i 1		i		support on, and topic the cornect to the best of	my Harry
	1		i		belle OF WELL	S)]]
	i		İ	1 -	Date Sample	
	<u> </u>	-+	-	\ [HOC WOO	, 19
	1		ļ.		Signature & Seal of Professional Surveyor	
	ļ	1	Ĭ		•	
					CHINDRE NO SOHR	W. WEST,
					HAILING &	
330 660 990	1320 1650 1900 2310	2640 200	0 1500 100	0 500 0		

MULTIPOINT SURFACE USE AND OPERATIONS PLAN

Marathon Oil Company

STETCO "10" #10 1980' FNL & 2310' FWL Section 10, T-18-S, R-31-E Eddy County, New Mexico Lease: LC-029388

This plan is submitted with the Application for Permit to Drill the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of necessary surface disturbance involved, and the procedure to be followed in rehabilitating the surface after the completion of all operations so that a complete appraisal can be made of the environmental effects associated with the proposed operations.

1. Existing Roads

Exhibit "A" is a portion of a topographic map showing the location of the proposed well as staked. Proceed west from Hobbs, NM, on U.S. Highway 180. Turn west on NM Highway 529. After 31 miles, turn west on U.S. Highway 82 for 1/2 mile to Highway 222. Turn south on Highway 222 for 2 miles to caliche road, NM 249. Go east 1.3 miles. Turn N.E. on dirt road for 1.3 miles; turn west on dirt road for .5 mi., then north .6 mile, then west into location. All existing roads used to access the proposed location shall be maintained in the same or better condition than presently found.

2. Planned Access Roads

A. Length and Width

An access road of approximately 800' in length and 14' in width will be constructed. The proposed access road will enter the location from the east.

B. Surfacing Material

6" of caliche compacted and rolled

C. Maximum Grade

Three Percent (3%)

D. Turnouts

None Required

E. Drainage Design

Natural drainage.

F. Culverts

None required.

G. Cuts and Fills

None required.

H. Gates, Cattlegaurds and Fences

None Required.

3. Location of Existing Wells

Exhibit "B" is a map showing the location of all the wells within a one mile radius of the proposed well.

4. Location of Existing and Proposed Facilities

- A. Exhibit "C" is a map of the existing roads with the proposed well location.
- B. In the event of a producible oil well, oil will be stored at the battery location on the Stetco "10" #10 pad with production metered at the location. The gas will be piped to existing flow lines in a manner to be determined at a later date.

Location and Type of Water Supply

Water will be furnished and trucked by a Contractor.

6. Source of Construction Materials

Caliche for surfacing the drilling pad and access road will be obtained from a pit in the NW/4, SW/4 and NE/4 of the NW quarter section of Section 15, T-18-S, R-31-E. This area has been cleared for construction by the following archaeological clearance numbers, #85-195, #85-345.

7. Methods of Handling Waste Disposal

- A. Drill cuttings will be disposed of in the drilling pits.
- B. Drilling fluids will be vacuumed from the reserve pit and hauled to an approved disposal well. Reserve pit contents will be allowed to dry and pitwalls backfilled. All areas of the pad and reserve pit not necessary to production will be re-contoured. Top soil will be redistributed and reseeded with the recommended seed mixture.

- C. Water produced during tests will be disposed of in the drilling pits and hauled to an approved salt water disposal well.
- D. Current laws and regulations pertaining to the disposal of human waste will be complied with.
- E. Trash, waste paper, garbage, and junk will be stored in a trailer on location and hauled to an approved disposal site.
- F. All trash and debris will be removed from the wellsite within 30 days after finishing drilling and completion operations.

8. Ancillary Facilities

None required.

9. Wellsite Layout

Exhibit "D" shows the relative location of the rig components and reserve pits.

10. Plans for Restoration of Surface

- A. After finishing drilling and completion operations all equipment and other materials not necessary for operations will be removed. Pits will be filled and leveled and the location cleaned of all trash and junk to leave the wellsite in an aesthetically pleasing condition as is possible.
- B. Any unguarded pits containing fluids or trash will be fenced until they are filled or leveled.
- C. After abandonment of well, equipment will be removed, the location will be cleaned, and the pad and access road will be ripped and returned to as near the original appearance as is possible.
- D. In the event of a producer, the land not necessary for production operations will be re-contoured and seeded with the recommended mixture submitted by the BLM.

11. Other Information:

A. Topography

The location is situated on a duned landform.

B. Soil

Typic Torripsamment subgroup.

Multipoint Surface Use and Operations Plan Page 4

C. Flora and Fauna

The vegetation cover consists of native range grasses with yucca plants, cactus and mesquite. Wild life in the area includes rabbits, dove, quail, and other inhabitants typical of semi-arid climate.

D. Ponds and Streams

Local drainage in this area is internal.

E. Residence and Structures

None nearby.

F. Archaeological, Historical and Cultural Sites

None observed in the area. The Archaeological Inspection Report is being forwarded by Archaeological Consultants, Inc.

G. Land Use

Grazing with hunting in season.

H. Surface Ownership

The proposed wellsite is on land owned by the Federal Government.

12. Operators Representative

Stanley L. Atnipp P. O. Box 552 Midland, TX 79702 (915) 682-1626

13. Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist, that the statements made in this place are, to the best of my knowledge true and correct; and, that the work associated with the operations proposed herein will be performed by Marathon Oil Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

S. L. Atnipp

Drilling Superintendent

10-30-90

MARATHON OIL COMPANY

STETCO "10" #10 ADDITIONAL INFORMATION Comply with Order 1

In conjunction with Form 9-331C, Application to drill subject well, Marathon Oil Company submits the following items of information in accordance with BLM requirements:

1. Geological Name of Surface Formation

Quaternary Alluvium

2. Estimated Tops of Important Geological Markers

Rustler	810′	Delaware	4850′
Base of Salt	1990'	Bone Spring	5630′
Yates	2095'	1st Sand	7610 ′
Seven Rivers	2465′	2nd Carb	7850 ′
Oueen	3310′	2nd Sand	8140′
Grayburg	3825 <i>'</i>	3rd Carb	8820′
San Andres	4275 <i>'</i>	520 0010	
San Andres	4413		

3. Estimated Depths of Anticipated Water, Oil or Gas Bearing Formations

Yates (water) Seven Rivers (water) Queen (water & oil) Grayburg (water & oil) San Andres (water & oil)	2095' 2465' 3310' 3825' 4275'	Bone Spring 1st Sand (water & oil) 2nd Carb (water & oil) 2nd Sand (water & oil) 3rd Carb (water & oil)	5630' 7610' 7850' 8140' 8820'
Delaware (water & oil)	4850′		

4. Casing and Cementing Program

13-3/8" Surface to 750': Cement to surface with 835 sxs Class

"C" with 2% CaCl2

8-5/8" Intermediate to 2450': Cement to surface with 1100 sxs

Modified Lite followed by 250 sxs

Class "C" with 2% CaCl2

5-1/2" Production to 9000': Cement to 2200' with 1500 sxs Class

"H" PozMix. Stage tool @ ± 7400'

5. Pressure Control Equipment (Exhibit E)

13-3/8" Surface: 13-5/8" 3000 psi working pressure annular preventer tested to 2000 psi

13-5/8" 3000 psi working pressure pipe and blind rams tested to 3000 psi

Additional Information Page 2

8-5/8" Intermediate:

11" 3000 psi working pressure annular preventer tested to 2000 psi

11" 3000 psi working pressure pipe rams and blind rams tested to 3000 psi Choke manifold tested to 3000 psi

6. Proposed Mud Program

0 - 750 Native; Mud Wt: 8.3 - 9.2, Viscosity 28-34 Sec

750 - 2,700 Brine Water; Mud Wt: 9.0 - 10.0, Viscosity 28-32 Sec

2,700 - 7,000 Fresh Water; Mud Wt: 8.6 - 8.8, Viscosity 28-32 Sec

7,000 - 9,000 Fresh Water; Mud Wt: 8.8 - 9.2, Viscosity 32-44 Sec

7. Auxiliary Equipment

A safety valve and subs to fit all strings will be kept on the floor at all times. An upper kelly cock valve will be utilized with the handle available on the rig floor.

8. Testing, Logging, and Coring Programs

A. Coring Program:

None anticipated.

B. Testing Program:

None anticipated.

C. Logging Program:


TD-Surface - GR-DIL, GR-LDT-CNL, TD-TOP of Bone Spring, GR-LSS, NGT, DLL-MSFL.


9. <u>Abnormal Pressures, Temperatures or Potential Hazards</u>


None anticipated

10. Anticipated Starting Date

As soon as possible

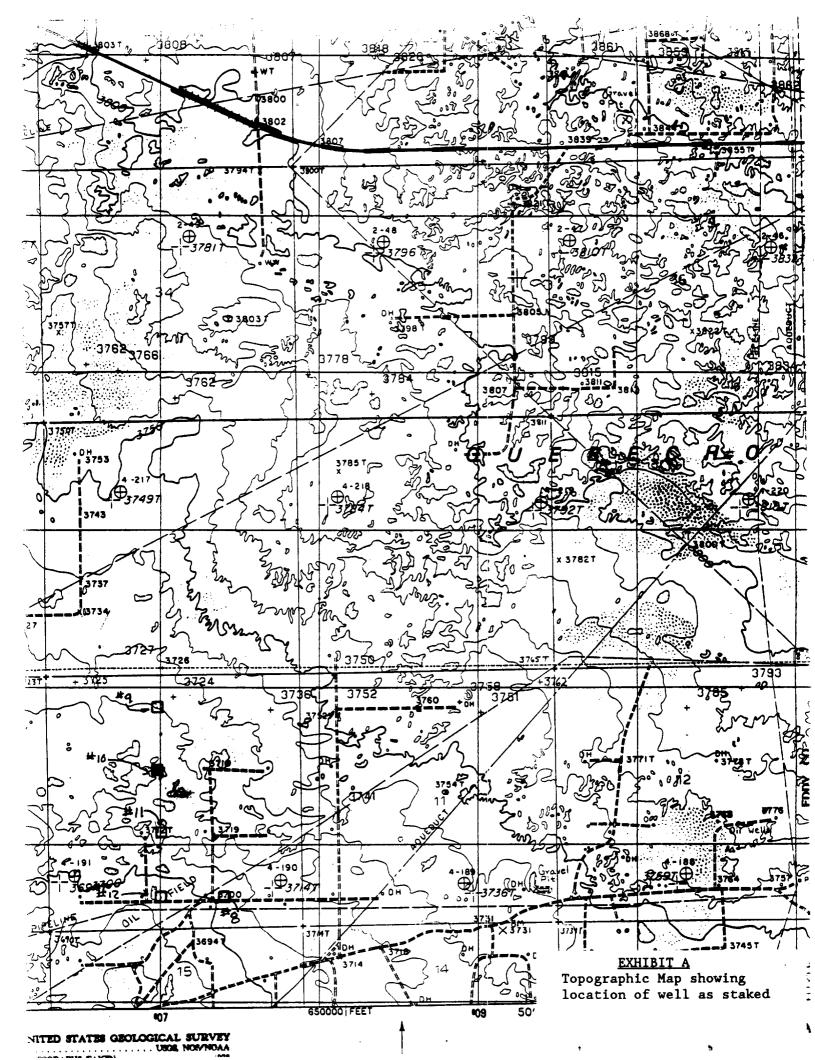

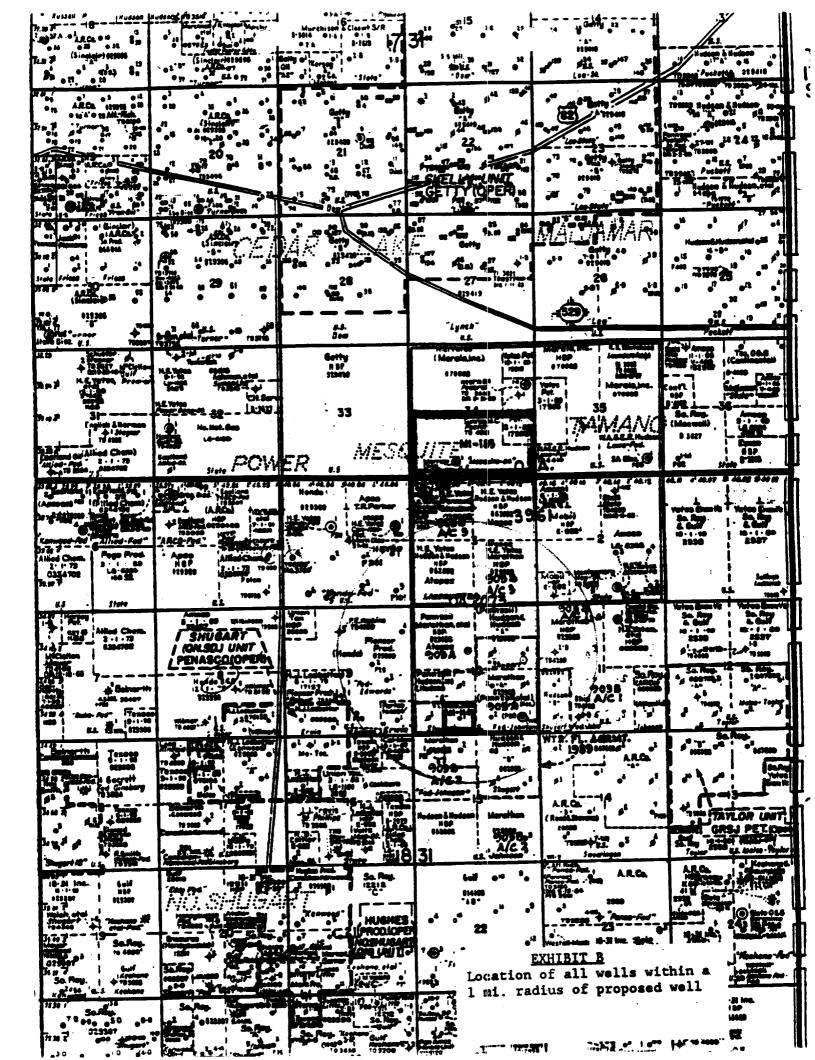

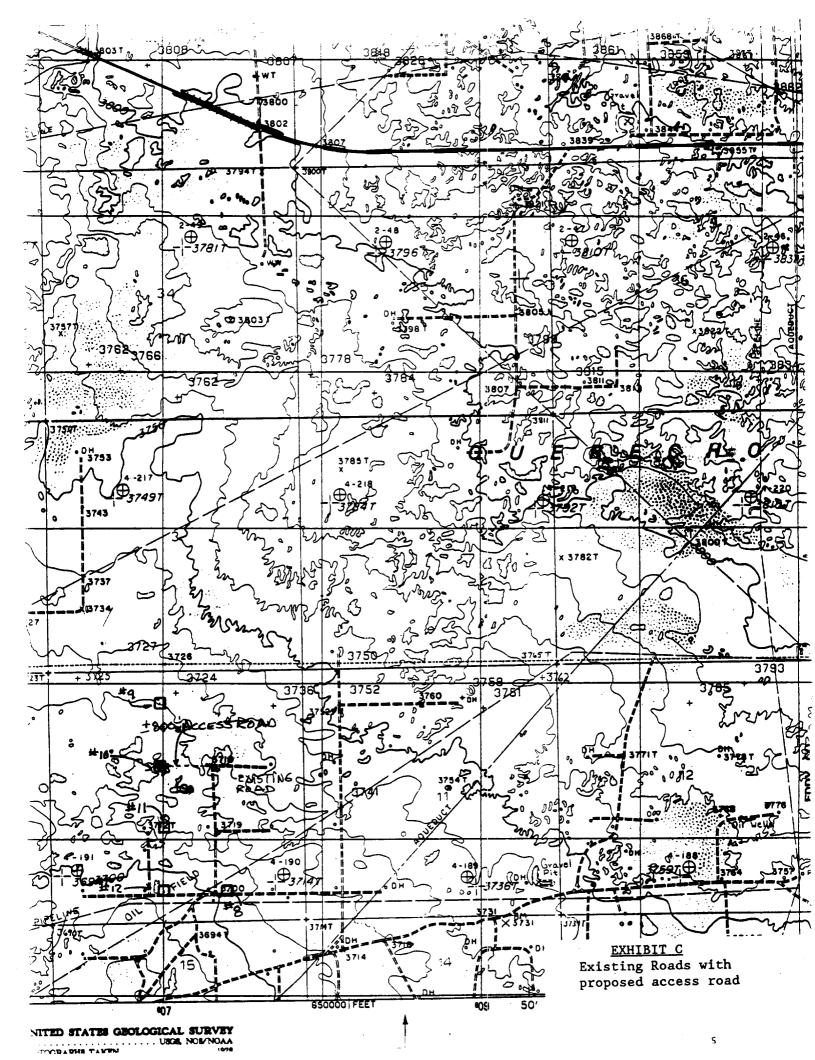

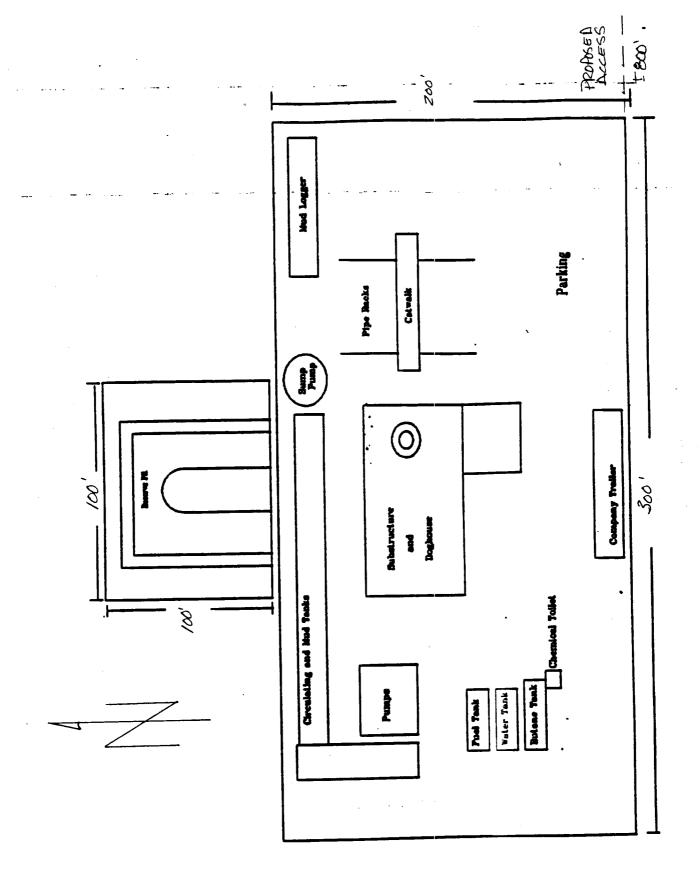


EXHIBIT D
Relative location of rig components & reserve pit

