


DRILLING CONTROL

CONDITION V-10,000 31 WP

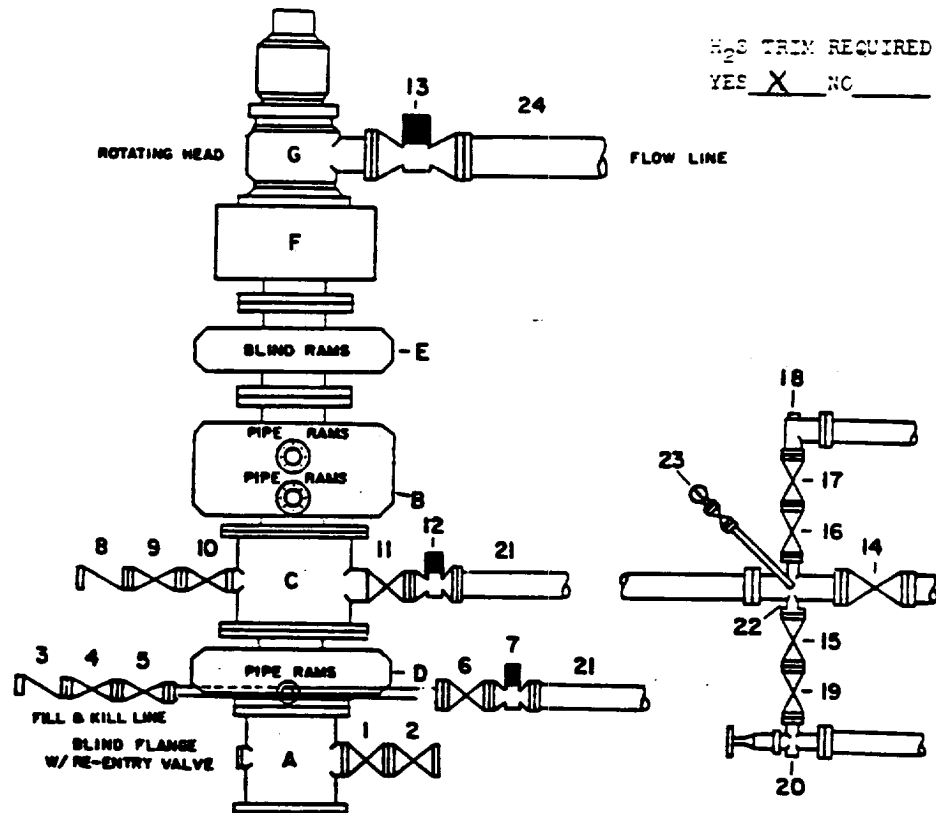

DRILLING CONTROL

MATERIAL LIST - CONDITION V

- | | |
|--------------------------|---|
| A | Texaco Wellhead |
| B | 10,000# W.P. Dual Ram Type preventer, hydraulic operated with 1" steel, 5000# W.P. control lines |
| C | 10,000# W.P. Drilling Spool with a minimum 2" flanged outlet for kill line and 4" minimum flanged outlet for choke line |
| D,E | 10,000# W.P. Single Ram type preventer, hydraulic operated with 1" steel, 5000# W.P. control lines or double ram type. |
| F | 10,000# W.P. Annular Preventer, hydraulic operated with 1" steel, 5000# W.P. control lines |
| G | <u>When Required</u> - Rotating Head |
| 1,2,4,5,9,10,15,16,17,19 | 2" minimum 10,000# W.P. flanged full opening steel gate valve, or Halliburton Lo Torc Plug valve |
| 3,8 | 2" minimum 10,000# W.P. back pressure valve |
| 6,11,14 | 4" minimum 10,000# W.P. flanged full opening steel gate valve |
| 7,12 | 4" minimum 10,000# W.P. flanged full opening hydraulic valve |
| 13 | <u>When Required</u> - 10" minimum 1000# W.P. flanged full opening hydraulic valve |
| 21 | 4" minimum 10,000# W.P. 4130 mechanical tubing with flanged ends, or equivalent |
| 22 | 2" minimum x 4" minimum 10,000# W.P. flanged cross |
| 18 | 2" minimum 10,000# W.P. automatic choke |
| 20 | 2" minimum 10,000# W.P. adjustable choke equipped with carbide trim |
| 23 | Cameron Mud Gauge or equivalent (location in choke line optional) |
| 24 | <u>When Required</u> - 10" steel flow line |

SCALE	DATE	EST. NO.	DRG. NO.
DRAWN BY			
CHECKED BY			
APPROVED BY			



TEXACO, INC.
MIDLAND DIVISION
MIDLAND, TEXAS



EXHIBIT G