


H₂S TRDM REQUIRED
YES _____ NO _____

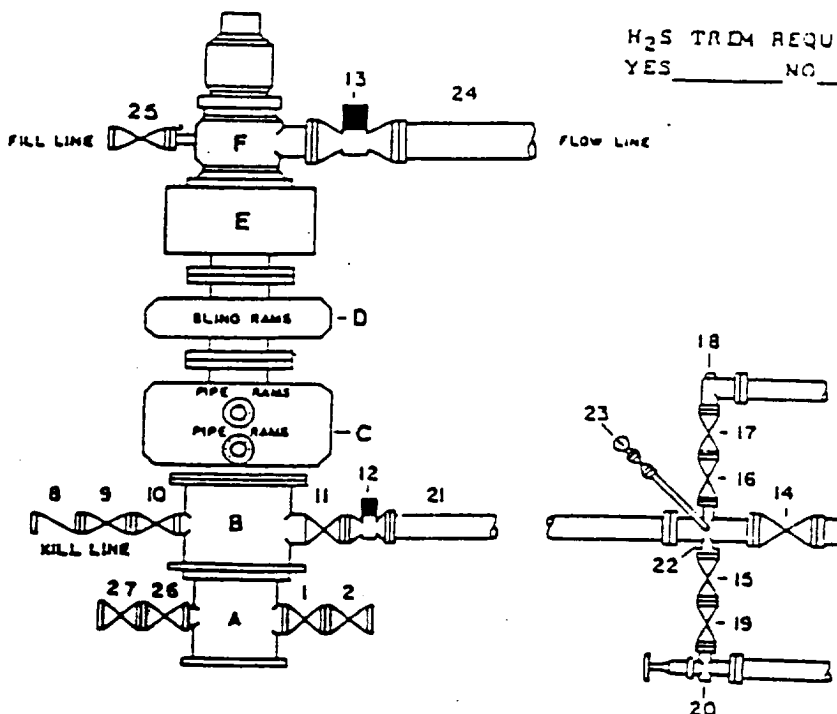

DRILLING CONTROL

MASTERSAL 100R - CONDITION V-9

- A Tensco Wellhead
- B 10,000# W.P. Drilling Spool with a minimum 2" flanged outlet for kill line and 4" minimum flanged outlet for choke line
- C 10,000# W.P. Dual Variable Ram Type preventer, hydraulic operated with 1" steel, 3000# W.P. control line
- D 10,000# W.P. Single Ram Type preventer, hydraulic operated with 1" steel, 3000# W.P. control line
- E 10,000# W.P. Annular preventer, hydraulic operated with 1" steel, 3000# W.P. control line
- F When required - Rotating Head with fill up outlet and extended choke line
- 1,2,9,10, 2" minimum 10,000# W.P. flanged full opening steel gate valve, or Halliburton LS Tord Plug valve
- 13,14,17, 15,16,17
- G 2" minimum 10,000# W.P. Back pressure valve
- 11,14 4" minimum 10,000# W.P. flanged full opening steel gate valve
- 12 4" minimum 10,000# W.P. flanged full opening hydraulic valve
- 13 When required - 10" minimum 1000# W.P. flanged full opening hydraulic valve
- 21 4" minimum 10,000# W.P. 4130 mechanical tubing with flanged ends, or equivalent
- 22 2" minimum X 4" minimum 10,000# W.P. flanged cross
- 18 2" minimum 10,000# W.P. automatic choke
- 20 2" minimum 10,000# W.P. adjustable choke equipped with carbide trim
- 23 Cameron Mud Gauge or equivalent (location in choke line optional)
- 24 When required - 10" steel flow line
- 25 2" minimum 1000# W.P. flanged or threaded full opening steel gate valve or Halliburton LS Tord plug valve



TEXACO, INC.
MIDLAND DIVISION
MIDLAND, TEXAS



SCALE:	DATE	EST NO	DRG NO
DRAWN BY:			
CHECKED BY:			
APPROVED BY:			

EXHIBIT G-1

