District 1
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-144 March 12, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure Is pit or below-grade tank covered by a "general plan"? Yes No

Type of action: Registration of a pit of	or below-grade tank L Closure of a pit or below-gra	de tank 🗵
Operator: <u>H.E.C. PETROLEUM</u>	Telephone: <u>505-327-4573</u> e-mail add	ress: <u>mpippin@ddbroadband.net</u>
Address: <u>c/o Agent - Mike Pippin LLC</u> , 3104 N. Sullivan, Farmington, NM S		
Facility or well name: ALBERDING 3 #3 API #: 30-045		
County: San Juan Latitude Longitude N	IAD: 1927 ☐ 1983 ☐ Surface Owner Federal ☐ S	tate Private Indian
PNA	Below-grade tauk	
Ptt Tune Delline V Destruction Dimessal	Volume:bbl Type of fluid:	
Type: Drilling N Production Disposal		
Workover	Construction material: Double-walled, with leak detection? Yes If no	
Lined Unlined	Double-watted, with leak detection? Tes 11 no	i, explain why hot.
Liner type: Synthetic Thickness 12 mil Clay Volume		
<u>2,571_bbl</u>		
Depth to ground water (vertical distance from bottom of pit to seasonal high	Less than 50 feet	(20 points) X
water elevation of ground water.)	50 feet or more, but less than 100 feet X	(10 points)
Water Clouded of Broader Water.	100 feet or more	(0 points)
	Yes X	(20 points) X
Wellhead protection area: (Less than 200 feet from a private domestic	No	(0 points)
water source, or less than 1000 feet from all other water sources.)		
	Less than 200 feet	(20 points) X
Distance to surface water: (horizontal distance to all wetlands, playas,	200 feet or more, but less than 1000 feet X	(10 points)
irrigation canals, ditches, and perennial and ephemeral watercourses.)	1000 feet or more	(0 points)
	Ranking Score (Total Points)	60
If this is a pit closure: (1) attach a diagram of the facility showing the pit's	relationship to other equipment and tanks. (2) Indicate	e disposal location:
onsite offsite If offsite, name of facility	· · · · · · · · · · · · · · · · · · ·	-
end date. (4) Groundwater encountered: No 🔀 Yes 🗌 If yes, show depth b		
· · · · · · · · · · · · · · · · · · ·	COW ground surface	ight results. (5) rumon som sample results and
a diagram of sample locations and excavations.		
I hereby certify that the information above is true and complete to the best of m been/will be constructed or closed according to NMOCD guidelines , a Date: 6/17/04	ny knowledge and belief. I further certify that the all a general permit [], or an (attached) alternative O	bove-described pit or below-grade tank has PCD-approved plan □.
Printed Name/Title <u>Mike Pippin - Agent - Petroleum Engineer</u> Signatu	ire Mike Lippin	
Your certification and NMOCD approval of this application/closure does not re		
otherwise endanger public health or the environment. Nor does it relieve the operations.		
Approval: JUN 1 9 2004		<u> </u>
Date: 2004	DEPINY OF A	
Printed Name/Title Perus Lewy	Signature OIL & GAS INSTECTOR,	DIST. #
7//	~	Topic T.
<i>(</i>		

M & G DRILLING COMPANY c/o Mike Pippin LLC 3104 N. Sullivan Farmington, NM 87401 (505) 327-4573

6/17/04

GENERAL DESCRIPTION OF DRILL PIT CLOSING ALBERDING 3 #3 FRTC P 3 31 13


Start location rehab & pit closing 6/2/04

- 1. Take samples of mud/cuttings from the 4 corners of pit.
- 2. Remove the fencing around the drilling pit.
- 3, Cut liner off at mud level and haul off to disposal facility.
- 4. Using track-hoe, mix any soft spots & cover pit with dry soil.
- 5. Lay back slopes & all disturbed areas.
- 6. Ripped location for seeding.
- 7. Plan to disc area & re-seed with BLM mix in 3 weeks.
- 8. Complete on 6/3/04.

P SEC. 3 T31N R13W SAN JUAN COUNTY, NM **ALBERDING 3 #3 FRTC PURE RESOURCES**

5/17/04 P.M. PIPPIN

IRRIGATION DITCH \

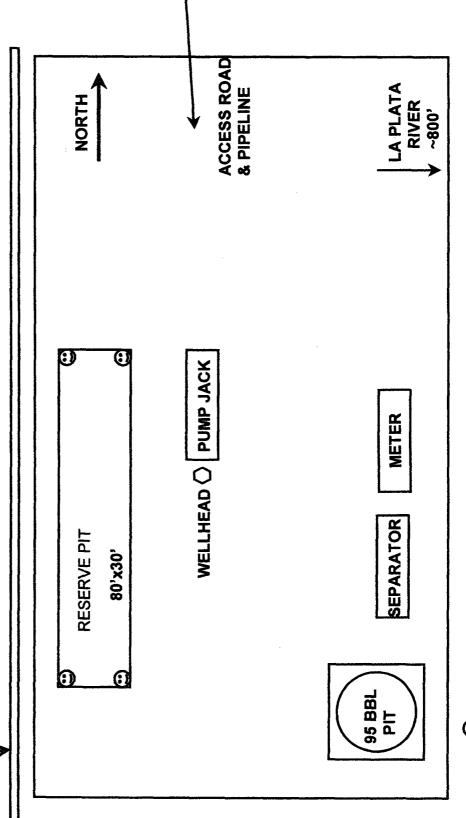

© SAMPLE LOCATIONS



EC, SAR, ESP, CI Analysis

Client:	H.E.C. Petroleum	Project #:	04089-001
Sample ID:	Alberding 3-3	Date Reported:	06-10-04
Laboratory Number:	28964	Date Sampled:	06-02-04
Chain of Custody:	12255	Date Received:	06-07-04
Sample Matrix:	Soil	Date Extracted:	06-09-04
Preservative:	Cool	Date Analyzed:	06-10-04
Condition:	Cool & Intact		

	Analytical	
Parameter	Result	Units

Conductivity @ 25° C	5.53	mmhos/cm
Calcium	84.0	mg/Kg
Magnesium	28.8	mg/Kg
Sodium	970	mg/Kg
Sodium Absorption Ratio (SAR)	32.9	ratio
Exchangeable Sodium Percent (ESP)	32.0	percent
Chloride	1,610	mg/Kg

Reference:

U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983.

Comments:

Drilling Pits.

Analyst C. Oferen

Mustere of Walter



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

	· ·		
Client:	H.E.C. Petroleum	Project #:	04089-001
Sample ID:	Alberding 3-3	Date Reported:	06-10-04
Laboratory Number:	28964	Date Sampled:	06-02-04
Chain of Custody No:	12255	Date Received:	06-07-04
Sample Matrix:	Soil	Date Extracted:	06-09-04
Preservative:	Cool	Date Analyzed:	06-09-04
Condition:	Cool and Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	0.7	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	0.7	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pits.

Analyst C. african

Mustine m Walters



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	H.E.C. Petroleum	Project #:	04089-001
Sample ID:	Alberding 3-3	Date Reported:	06-10-04
Laboratory Number:	28964	Date Sampled:	06-02-04
Chain of Custody:	12255	Date Received:	06-07-04
Sample Matrix:	Soil	Date Analyzed:	06-09-04
Preservative:	Cool	Date Extracted:	06-09-04
Condition:	Cool & Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
_		4.0
Benzene	11.5	1.8
Toluene	26.2	1.7
Ethylbenzene	14.8	1.5
p,m-Xylene	100	2.2
o-Xylene	31.5	1.0
Total BTEX	184	

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	100 %
	1,4-difluorobenzene	100 %
	Bromochlorobenzene	100 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pits.

Analyst C. Oglica

Mister of Wasters Review



TRACE METAL ANALYSIS

Client:	H.E.C. Petroleum	Project #:	04089-001
Sample ID:	Alberding 3-3	Date Reported:	06-10-04
Laboratory Number:	28964	Date Sampled:	06-02-04
Chain of Custody:	12255	Date Received:	06-07-04
Sample Matrix:	Soil	Date Analyzed:	06-10-04
Preservative:	Cool	Date Digested:	06-09-04
Condition:	Cool & Intact	Analysis Needed:	RCRA Metals

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	TCLP Regulatory Level (mg/Kg)
Arsenic	0.017	0.001	5.0
Barium	0.822	0.001	100
Cadmium	ND	0.001	1.0
Chromium	0.002	0.001	5.0
Lead	0.001	0.001	5.0
Mercury	ND	0.001	0.2
Selenium	0.009	0.001	1.0
Silver	ND	0.001	5.0

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Drilling Pits.

Analyst

Mistine m Wallers
Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505 • 632 • 0615 • Fax 505 • 632 • 1865