

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0136
Expires January 31, 2004

RECEIVED nmnm03371


APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMSF - 019414
1b. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name JOHN, NM
2. Name of Operator XTO Energy Inc.		7. Unit or CA Agreement Name and No. Stanolind Gas Com "B" #3
3a. Address 2700 Farmington Ave., Bldg. K. Ste 1 Farmington, NM		8. Lease Name and Well No. 3004532250
3b. Phone No. (include area code) 505 871 1234		9. API Well No. 3004532250
4. Location of Well (Report location clearly and in accordance with any State requirements)* At surface 1,010' FSL x 2,480' FWL in sec 9, T32N, R12W At proposed prod. zone		10. Field and Pool, or Exploratory Basin Fruitland Coal
14. Distance in miles and direction from nearest town or post office* This well is located 12 northeast of the La Plata, NM postoffice		11. Sec., T., R., M., or Blk. and Survey or Area N Sec 9, T32N, R12W
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) 1,010'	16. No. of Acres in lease 302.63	17. Spacing Unit dedicated to this well 280.38 - 8/2 A11
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 2,250'	19. Proposed Depth 2000'	20. BLM/BIA Bond No. on file
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6,125' ungraded ground level	22. Approximate date work will start* Summer, 2004	23. Estimated duration 1 week

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Jeffrey W. Patton	Date 3/24/04
Title Drilling Engineer		
Approved by (Signature) Original Signed: Stephen Mason	Name (Printed/Typed)	Date AUG 04 2004
Title Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on Reverse)

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

This permit is subject to technical and
procedural review pursuant to 43 CFR 3165.3
and appeal pursuant to 43 CFR 3165.4

APD/ROW

NMOCD

DISTRICT I
P.O. Box 1980, Hobbs, N.M. 88241-1980

DISTRICT II
P.O. Drawer DD, Artesia, N.M. 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

P.O. Box 2088
Santa Fe, NM 87504-2088

Form C-102

Revised February 21, 1994

Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

070 Farmington, NM ☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30045-32250	² Pool Code 71629	³ Pool Name Basin Frontland Coal
⁴ Property Code 22637	⁵ Property Name STANOLIND GAS COM B	⁶ Well Number 3
⁷ GRID No. 167067	⁸ Operator Name XTO ENERGY INC.	⁹ Elevation 6125

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	9	32-N	12-W		1010	SOUTH	2480	WEST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 28038 S12		¹³ Joint or Infill I		¹⁴ Consolidation Code		¹⁵ Order No.			


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

ORIGINAL

Do Not Mark

SEC. CORNER
FD 3 1/4" BC
BLM 1952

COLORADO
NEW MEXICO

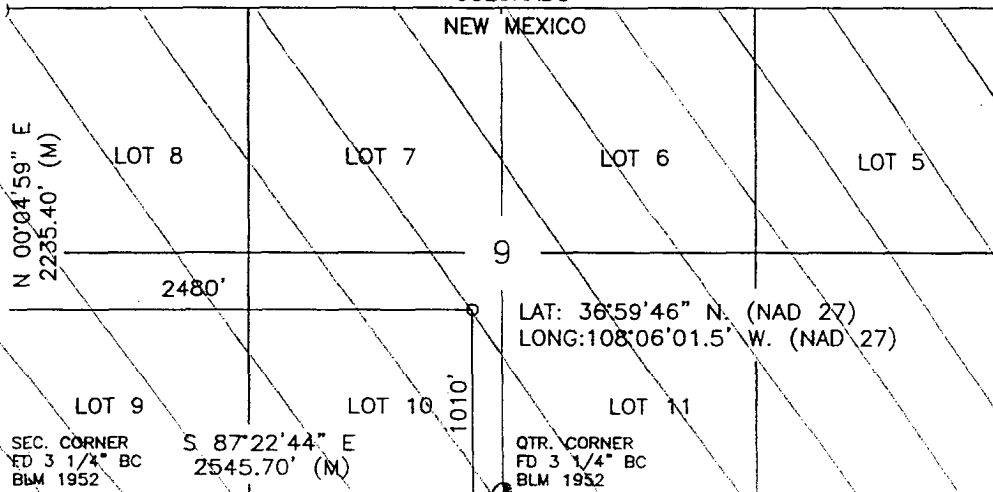

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief

Kelly K Small
Signature
Kelly K Small
Printed Name
Drilling Assistant
Title
11/20/03
Date


18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

10-16-03
Date of Survey
David A. Johnson
Signature and Seal of Professional Surveyor
14827
Certificate Number




XTO ENERGY INC.
 STANOLIND GAS COM B No. 3, 1010 FSL 2480 FWL
 SECTION 9, T32N, R12W, N.M.P.M., SAN JUAN COUNTY, N. M.
 GROUND ELEVATION: 6125, DATE: OCTOBER 8, 2003

LAT. = 36°59'46" N
 LONG. = 108°06'01.5" W
 NAD 27

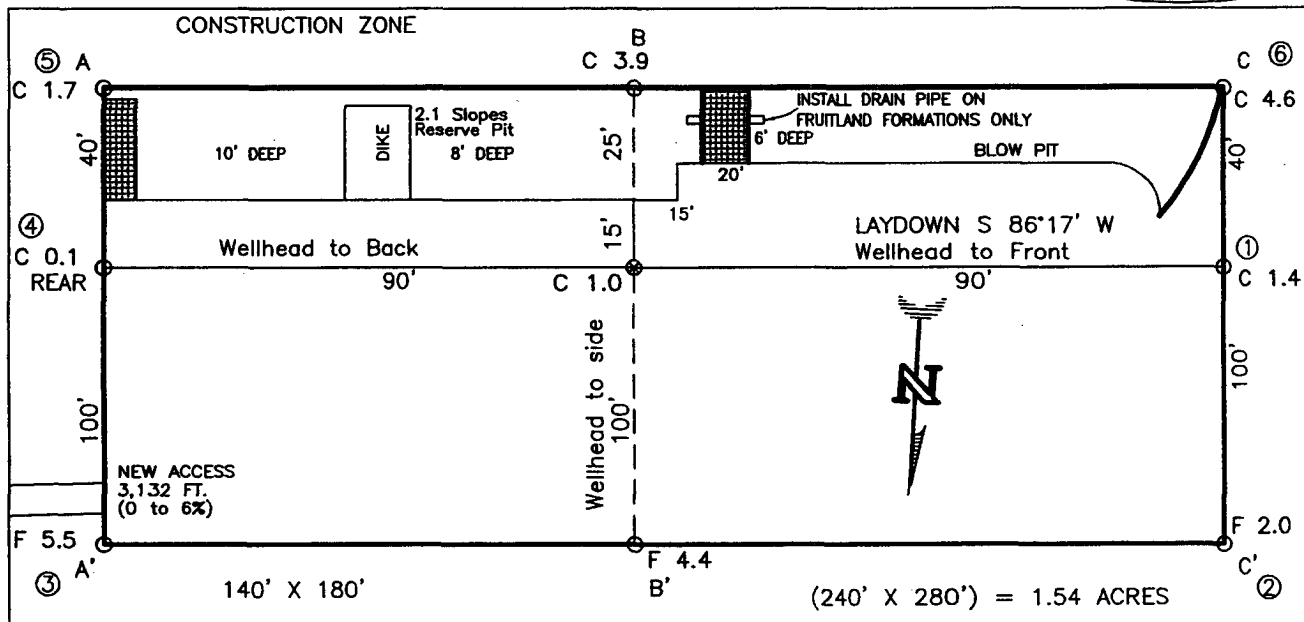

RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW - 3' WIDE AND 1' ABOVE SHALLOW SIDE).
 BLOW PIT: OVERFLOW PIPE HALFWAY BETWEEN TOP AND BOTTOM AND TO EXTEND OVER PLASTIC LINER AND INTO BLOW PIT.

NOTE: DAGGETT ENTERPRISES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES. NEW MEXICO ONE CALL TO BE NOTIFIED 48 HOURS PRIOR TO EXCAVATION OR CONSTRUCTION.

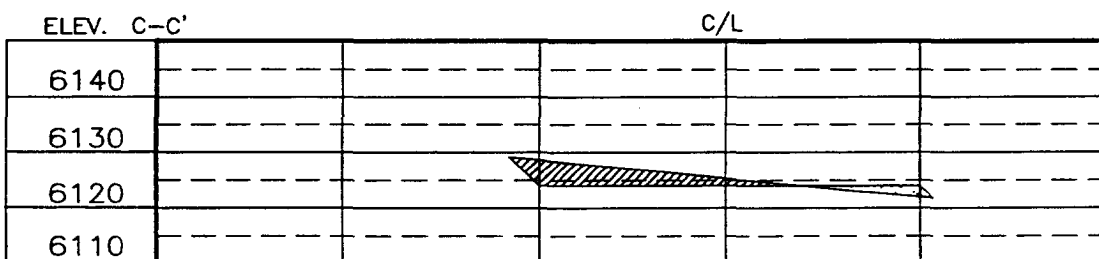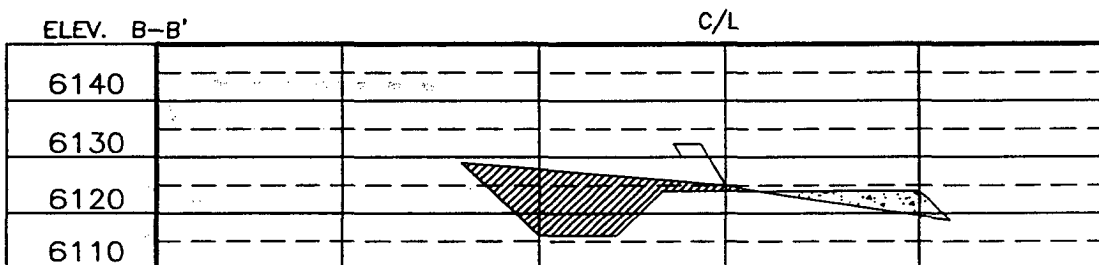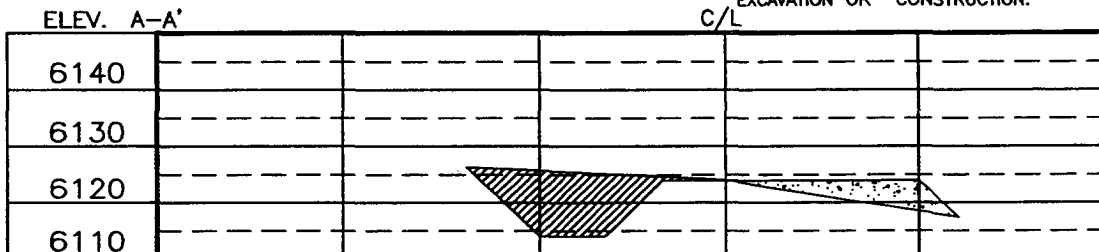

NOTE: CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.

DRAWN BY: A.G.

ROW#: CR229

CADFILE: CR229CF8

DATE: 10/10/03

Daggett Enterprises, Inc.
 Surveying and Oil Field Services
 P. O. Box 15068 Farmington, NM 87401
 Phone (505) 326-1772 Fax (505) 326-6019

EXHIBIT D

XTO ENERGY INC.

DRILLING PROCEDURE

Stanolind Gas Com "B" #3

Basin Fruitland Coal

March 24, 2004

Location: 1,010' FSL & 2,480' FWL, Sec 9, T32N, R12W County: San Juan State: New Mexico

PROJECTED TOTAL DEPTH: 2,000' OBJECTIVE: Fruitland Coal GR ELEV: 6,125'

1. MUD PROGRAM:

INTERVAL	0'-200'	200'-TD
HOLE SIZE	8-3/4"	6-1/4"
MUD TYPE	FW/Native	FW/Polymer
MUD WEIGHT, ppg	8.6-9.0	8.6-9.1
VISCOSITY, sec/qt	28-32	28-33
WATER LOSS, cc	NC	NC

Remarks: Drill the surface hole with fresh water. Run and cement 7" surface casing, circulating cement to surface. NU and test BOP equipment, then drill out with fresh water. Use polymer sweeps as needed for hole cleaning. At TD, sweep the hole prior to TOH to log.

2. CASING PROGRAM:

Surface Casing: 7" casing to be set at $\pm 200'$ in 8.8 ppg mud.

Interval	Length	Wt (ppf)	Gr	Cplg	Coll Rating (psi)	Burst Rating (psi)	Jt Str (M-lbs)	ID (in)	DD (in)	SF Coll	SF Burst	SF Tension
0'-200'	200'	20#	J-55	STC	2,270	3,740	234	6.456	6.331	9.99	4.59	58.5

Optimum makeup torque for 7" 20#, J-55, STC casing is **2,340 ft-lbs** (Min - 1,760 ft-lbs, Max - 2,930 ft-lbs).

Production Casing: 4-1/2" casing to be set at $\pm 2,000'$ in 8.8 ppg mud.

Interval	Length	Wt (ppf)	Gr	Cplg	Coll Rating (psi)	Burst Rating (psi)	Jt Str (M-lbs)	ID (in)	DD (in)	SF Coll	SF Burst	SF Tension
0'-TD	2,025'	10.5#	J-55	STC	4,010	4,790	132	4.052	3.927	3.57	3.33	5.24

Optimum makeup torque for 4-1/2", 10.5#, J-55, casing is **1,320 ft-lbs** (Min - 990 ft-lbs, Max - 1,650 ft-lbs).

Capacity of 7", 20# casing is: 0.04048 bbl/ft

Capacity of 4-1/2", 10.5# casing is: 0.01595 bbl/ft

3. WELLHEAD:

Casinghead: Larkin Fig 92 (or equivalent) 2,000 psig WP (4,000 psig test) with 7", 8rd pin on bottom and 8-5/8" API Modified 8rd thread on top.

Tubinghead: Larkin Model 612 (or equivalent) 2,000 psig WP (4,000 psig test) with 4-1/2", 8rd bottom thread and 8-5/8" 8rd API Modified top body thread, 4.090" minimum bore.

EXHIBIT 10

4. **CEMENT PROGRAM:**

A. Surface: 7", 20#, J-55, STC casing at $\pm 200'$.

Lead: 75 sx Type III cement (or equivalent) containing $\frac{1}{4}$ pps celloflake, 2% CaCl_2 (mixed at 14.6 ppg, 1.39 ft^3/sk , 6.67 gal wtr/sk).

Total slurry volume is 104.25 ft^3 , 250% excess of calculated annular volume required to circulate cement to surface.

B. Production: 4-1/2", 10.5#, J-55, STC casing at $\pm 2,000'$.

Lead: $\pm 125^*$ sx of Type III cement containing 8% gel, 1/4 pps Celloflake & 2% Phenoseal (mixed at 11.4 ppg, 3.03 ft^3/sk , 18.51 gal wtr/sk).

Tail: 80 sx Type III cement containing 1% CaCl_2 , 1/4 pps Celloflake & 2% Phenoseal (mixed at 14.5 ppg, 1.41 ft^3/sk , 6.72 gal wtr/sk).

Total estimated slurry volume is 492 ft^3 , $\pm 100\%$ excess of calculated annular volume required to circulate cement to surface.

* Actual cement volumes will be determined using log caliper volume plus 40% excess.

5. **DRILLING HAZARDS:**

- H_2S or other Poisonous Gases: No formations known to contain H_2S or any other poisonous gases will be penetrated with this wellbore.
- Abnormal Pressures: No overpressured zones are known to exist or are anticipated to be encountered during the drilling of this well.
- Lost Circulation: Seepage and/or lost circulation may be encountered below surface casing and can be controlled with conventional lost circulation materials added to the mud system.

6. **LOGGING PROGRAM:**

Array Induction/DFL/GR/SP/Cal
DSN/Spectral Density/GR/Cal/Pe

TD to bottom of surf csg.
TD to bottom of surf csg.

7. **FORMATION TOPS:**

Formation	Subsea Depth	Well Depth
Fruitland Fm	+4,800'	1337'
Lower Fruitland Coal	+4,700'	1437'
Pictured Cliffs SS	+4,600'	1537'
Lewis Shale	+4,420'	1717'
T.D.	+4,131'	±2,000'

Note: These depths, indicated above, are approximate. Actual depths of the formation tops will be determined from the well logs.

Maximum anticipated bottomhole pressure encountered during drilling should not exceed 0.35-0.43 psi/ft.

8. **COMPANY PERSONNEL:**

Name	Title	Office Phone	Home Phone
Dennis Elrod	Drilling Foreman	505-324-1090 505-486-6460 cellular	505-326-2024
Jeff Patton	Drilling Engineer	505-324-1090 505-330-2957 cellular	505-632-7882
Reed Meek	Project Geologist	817-885-2191	432-687-0615
Robin Tracy	Reservoir Engineer	817-885-2422	

9. **SPECIAL INSTRUCTIONS:**

- A. Daily drilling reports should be called in to the San Juan District office at (505) 324-1090 or faxed to (505) 564-6700 by 8:00 a.m.
- B. Deviation:
 Surface Hole: Maximum of 1° and not more than 1° change per 100'.
 Production Hole: Maximum of 4° and not more than 1° change per 100'.
Note: Maximum distance between surveys is 500'.
- C. NU & Pressure Test BOP, choke manifold & surface casing to 250/800 psig for 30 minutes. Report the pressure test on the IADC form as required.
- D. Drill out below surface casing after WOC 12 hours. Drill cement and float equipment with minimum weight and RPM until drill collars are below the bottom of the surface casing. Keep location clean and water usage to a minimum.
- E. Check BOP blind rams each trip and pipe rams each day. Strap the pipe on the last bit trip prior to reaching TD, or on the TOH to log.

EXHIBIT E

BOP SCHEMATIC FOR DRILLING OPERATIONS CLASS 1 (2M) NORMAL PRESSURE

TESTING PROCEDURE

1. Test BOP after installation:

Pressure test BOP to 200-300
psig (low pressure) for 5 min.

Test BOP to Working Press or
to 70% internal yield of surf csg
(10 min).


2. Test operation of (both) rams on every trip.

3. Check and record Accumulator pressure on every tour.

4. Re-pressure test BOP stack after changing out rams.

5. Have kelly cock valve with handle available.

6. Have safety valve and subs to fit all sizes of drill string.

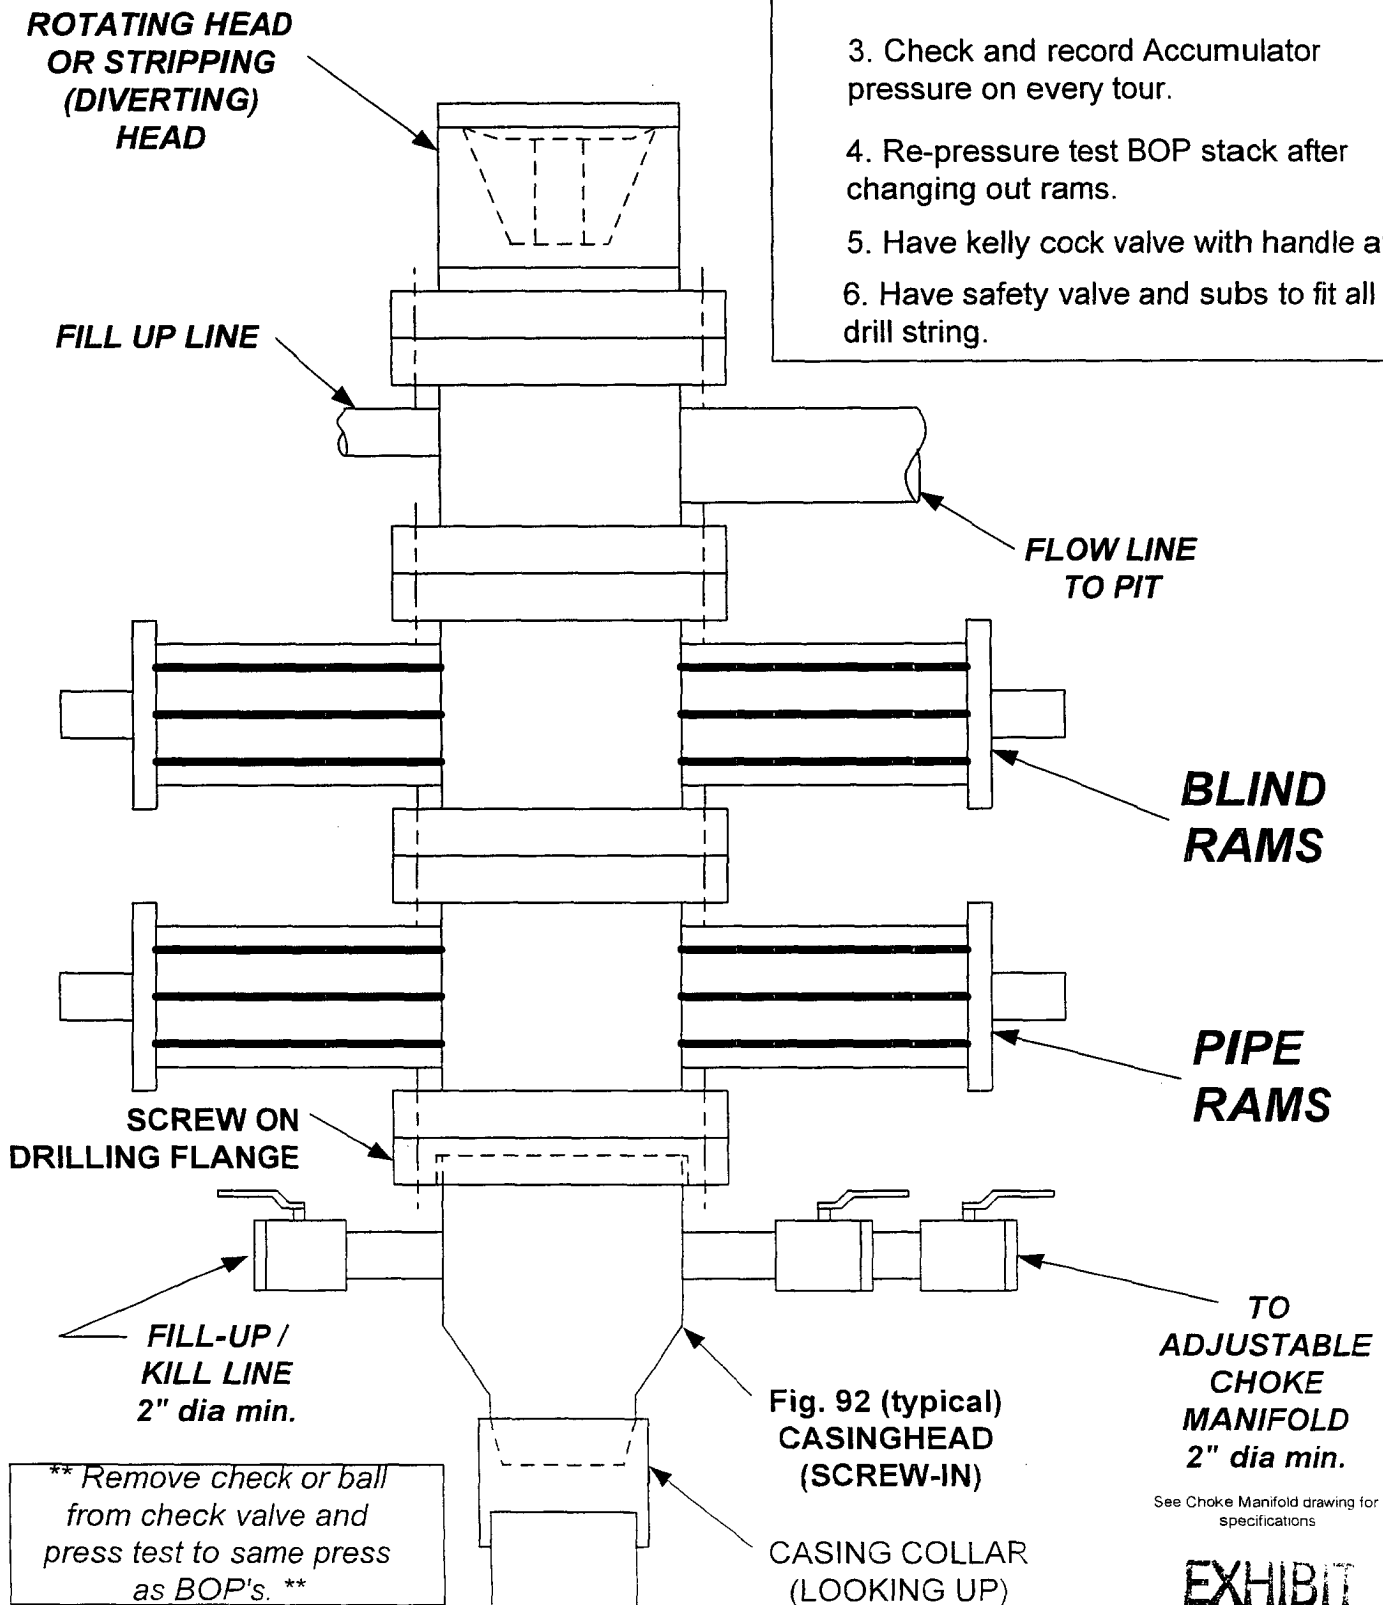

See Choke Manifold drawing for
specifications

EXHIBIT E

CHOKE MANIFOLD SCHEMATIC FOR DRILLING OPERATIONS CLASS 1 (2M) NORMAL PRESSURE

1. Stake all lines from choke manifold to pit.
2. Pressure test choke manifold after installation.
3. Pressure test manifold at the same time with the BOP Stack. Test manifold to the same test pressures.

TESTING PROCEDURE

