


30-045-32250



Scientific
Drilling

Directional Survey Certification

RE: XTO Energy Inc. Operator
Stanolind Gas Com "B" #3 Well Name & No.
San Juan County, NM Location
41DMP0704303 SDI Job No.



I, Judi Moore, having personal knowledge of all the facts, hereby
certify that the attached directional survey run from a measured depth of 276 feet to a
measured depth of 2307 feet is true and correct as determined from all available records.

Judi Moore
Signature

Well Planner
Title

Scientific Drilling International
Company


State of : Wyoming }
County of : Natrona } ss


On this 31st day of August, 2004, before me personally appeared
Judi Moore to me known as the person described in and who executed the foregoing
instrument and acknowledged that (s)he executed the same as his/her free act and deed.

Seal

Jennifer Whitehead
Notary Public

June 1, 2008
My Commission Expires





Scientific Drilling
Rocky Mountain Operations


DIRECTIONAL SURVEY REPORT

Prepared For

**XTO ENERGY INC.
Stanolind Gas Com "B" #3
San Juan County, NM**

***Prepared By:
Judi Moore, Well Planner
Scientific Drilling International
Rocky Mountain District***



Scientific Drilling International
7237 W. Barton Rd., Casper, WY 82604
P.O. Box 1600, Mills, WY 82644
(307) 472-6621
judim@sdicasper.com



Scientific Drilling
Rocky Mountain Operations

Field: San Juan County, NM
Site: Stanolind Gas Com "B" #3
Well: #3
Wellpath: OH
Survey: Survey #1

XTO Energy Inc.

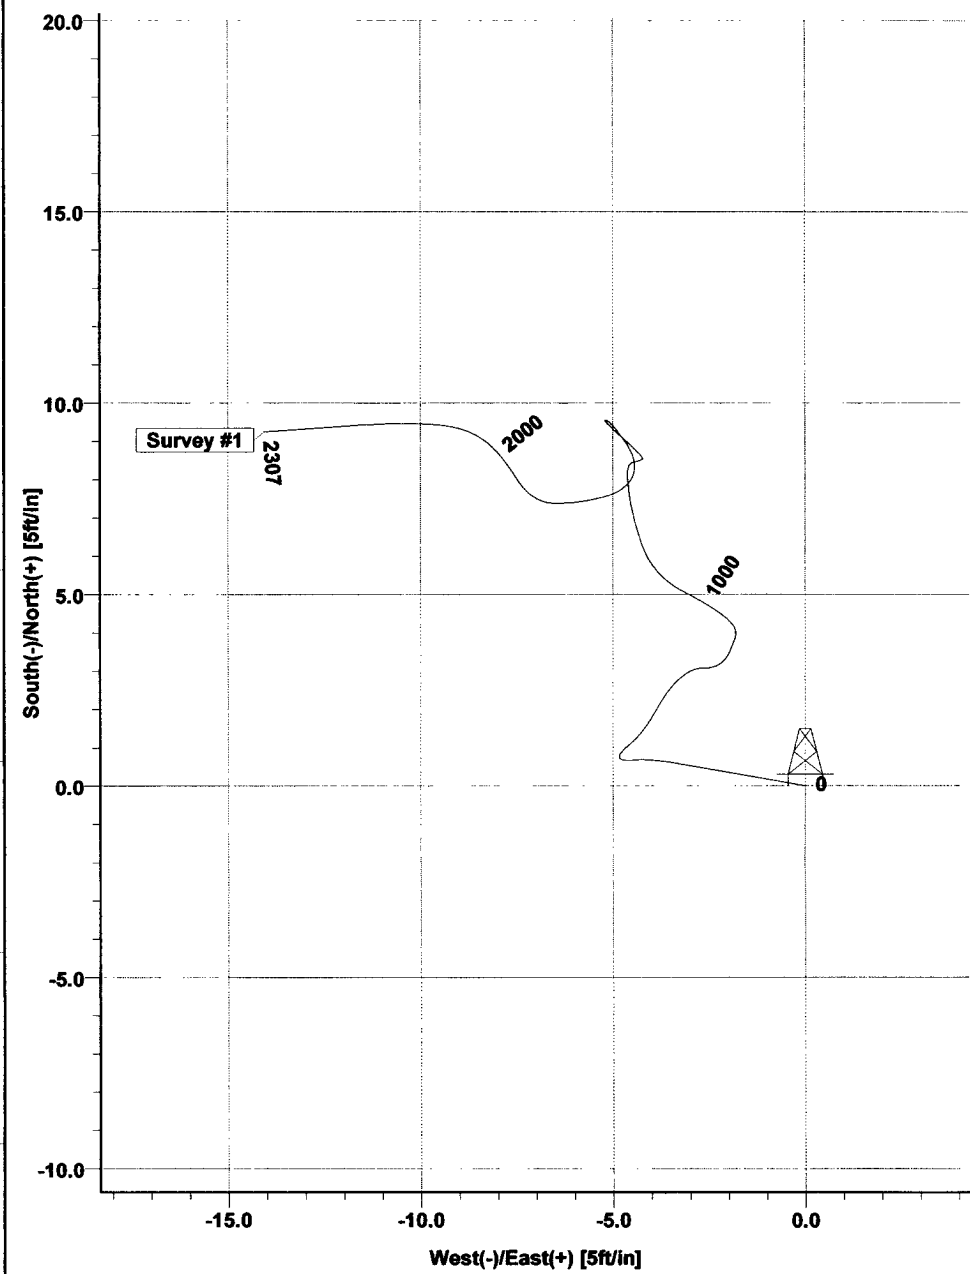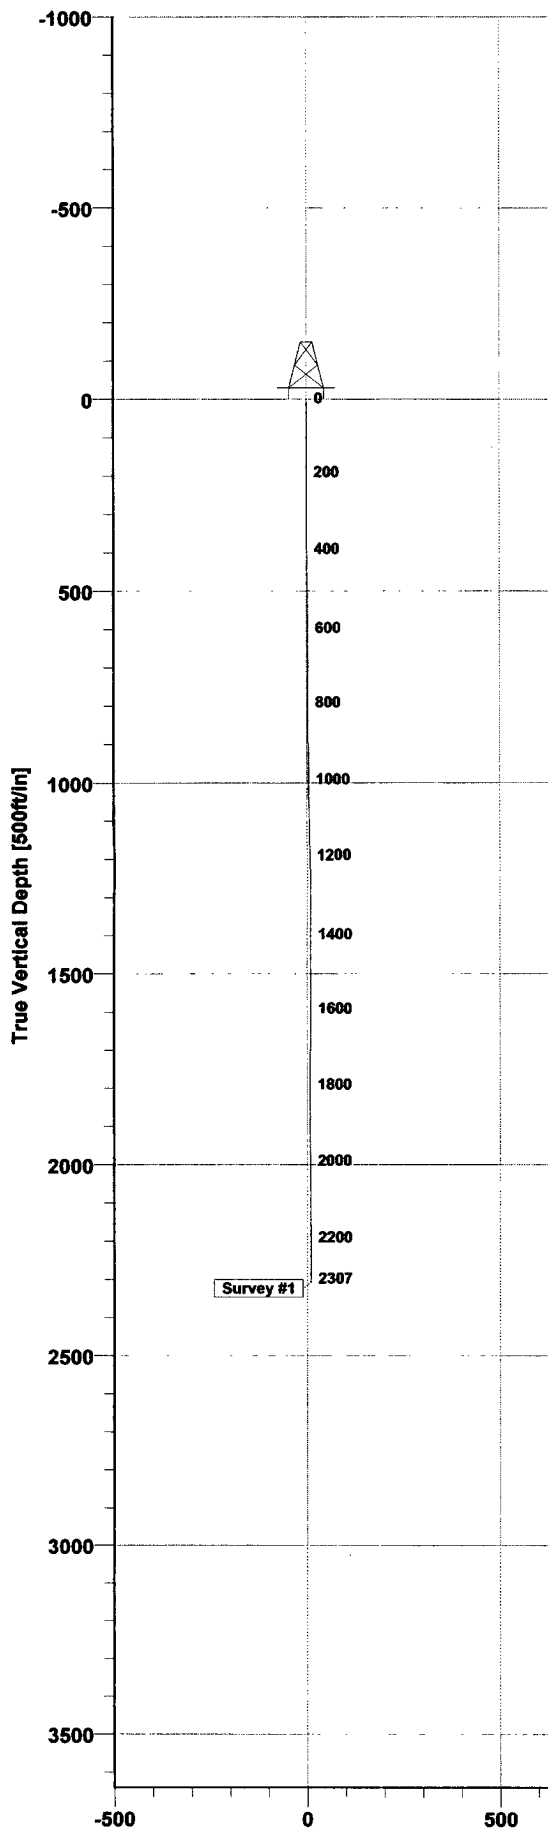

Survey: Survey #1 (#3/OH)
Created By: Judi Moore Date: 08/31/2004

BOTTOM HOLE CLOSURE

16.83 ft. 303.32° Azimuth

Scientific Drilling

Survey Completion Report

Company: XTO Energy Inc.	Date: 08/31/2004	Time: 12:27:47	Page: 1
Field: San Juan County, NM	Co-ordinate(NE) Reference:	Site: Stanolind Gas Com "B" #3	
Site: Stanolind Gas Com "B" #3	Vertical (TVD) Reference:	SITE 0.0	
Well: #3	Section (VS) Reference:	Well (0.00N,0.00E,0.00Azi)	
Wellpath: OH	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: Survey #1 **Start Date:** 08/23/2004

Company: Scientific Drilling **Engineer:** B.Bayer/Eiserman
Tool: MWD; **Tied-to:** From Surface

Field: San Juan County, NM

Map System: US State Plane Coordinate System 1927	Map Zone: New Mexico, Western Zone
Geo Datum: NAD27 (Clarke 1866)	Coordinate System: Site Centre
Sys Datum: Mean Sea Level	Geomagnetic Model: igrf2000

Site: Stanolind Gas Com "B" #3
SHL SEC.9,T32N,R12W 1010'FSL & 2480'FWL

Site Position:	Northing:	ft	Latitude:
From: Lease Line	Easting:	ft	Longitude:
Position Uncertainty: 0.00 ft			North Reference: True
Ground Level: 0.00 ft			Grid Convergence: -0.16 deg

Well: #3	Slot Name:
Well Position: +N/-S 0.00 ft Northing: 2181963.27 ft	Latitude: 36 59 46.000 N
+E/-W 0.00 ft Easting: 422003.55 ft	Longitude: 108 6 1.500 W
Position Uncertainty: 0.00 ft	

Wellpath: OH	Drilled From: Surface
Current Datum: SITE	Tie-on Depth: 0.00 ft
Magnetic Data: 06/29/2004	Above System Datum: Mean Sea Level
Field Strength: 51712 nT	Declination: 11.15 deg
Vertical Section: Depth From (TVD)	Mag Dip Angle: 63.84 deg
ft	+E/-W
	ft
	Direction
	deg
2000.00	0.00
	0.00
	0.00
	0.00

Survey

Meas Depth ft	Inclination deg	Azimuth deg	TVD ft	Vert Sect ft	N/S ft	E/W ft	DLS deg/100ft	CLen ft	CLSD ft	CLSA deg
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
276.00	1.40	280.00	275.97	0.59	0.59	-3.32	0.51	276.00	3.37	280.00
336.00	0.90	265.00	335.96	0.67	0.67	-4.51	0.97	60.00	4.56	278.47
416.00	1.00	49.90	415.96	1.07	1.07	-4.60	2.26	80.00	4.73	283.04
476.00	1.20	28.60	475.95	1.96	1.96	-3.90	0.75	60.00	4.37	296.61
536.00	0.70	47.00	535.94	2.76	2.76	-3.33	0.97	60.00	4.33	309.59
617.00	0.40	92.80	616.93	3.08	3.08	-2.69	0.63	81.00	4.09	318.88
677.00	0.30	66.20	676.93	3.13	3.13	-2.34	0.31	60.00	3.91	323.29
777.00	0.30	24.30	776.93	3.48	3.48	-1.99	0.21	100.00	4.01	330.23
857.00	0.30	20.60	856.93	3.87	3.87	-1.83	0.02	80.00	4.28	334.67
957.00	0.50	310.40	956.93	4.39	4.39	-2.07	0.49	100.00	4.86	334.77
1058.00	1.00	297.40	1057.92	5.08	5.08	-3.19	0.52	101.00	6.00	327.91
1160.00	1.00	340.80	1159.90	6.33	6.33	-4.27	0.72	102.00	7.64	326.01
1260.00	0.90	355.30	1259.89	7.94	7.94	-4.62	0.26	100.00	9.19	329.80
1320.00	0.30	75.80	1319.89	8.45	8.45	-4.51	1.50	60.00	9.58	331.92
1403.00	0.10	62.60	1402.89	8.54	8.54	-4.23	0.25	83.00	9.53	333.62
1483.00	1.10	311.90	1482.88	9.08	9.08	-4.74	1.42	80.00	10.24	332.42
1564.00	0.20	107.70	1563.88	9.56	9.56	-5.19	1.59	81.00	10.87	331.51
1644.00	0.90	145.00	1643.87	9.00	9.00	-4.69	0.94	80.00	10.15	332.46
1724.00	0.60	202.00	1723.87	8.10	8.10	-4.49	0.95	80.00	9.26	330.99
1804.00	0.90	255.00	1803.86	7.55	7.55	-5.25	0.90	80.00	9.19	325.15
1884.00	0.90	270.00	1883.85	7.38	7.38	-6.49	0.29	80.00	9.83	318.69
1964.00	1.10	328.60	1963.84	8.04	8.04	-7.52	1.24	80.00	11.01	316.92
2045.00	0.70	307.40	2044.83	9.00	9.00	-8.32	0.63	81.00	12.26	317.27

Scientific Drilling

Survey Completion Report

Company: XTO Energy Inc.	Date: 08/31/2004	Time: 12:27:47	Page: 2
Field: San Juan County, NM	Co-ordinate(NE) Reference:	Site: Stanolind Gas Com "B" #3	
Site: Stanolind Gas Com "B" #3	Vertical (TVD) Reference:	SITE 0.0	
Well: #3	Section (VS) Reference:	Well (0.00N,0.00E,0.00Azi)	
Wellpath: OH	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey

Meas Depth ft	Inclination deg	Azimuth deg	TVD ft	Vert Sect ft	N/S ft	E/W ft	DLS deg/100ft	CLen ft	ClSD ft	ClSA deg
2125.00	0.80	279.60	2124.83	9.39	9.39	-9.25	0.47	80.00	13.19	315.43
2250.00	1.90	265.80	2249.79	9.39	9.39	-12.18	0.91	125.00	15.38	307.62
2307.00	1.90	265.80	2306.76	9.25	9.25	-14.07	0.00	57.00	16.83	303.32

Annotation

MD ft	TVD ft	
2307.00	2306.76	Projection to bit