
Form 3160-5 (November, 1996)

## UNITED STATES MESELY DEPARTMENT OF THE INTERIOR DEC

FORM APPROVED

,	BLMBUREAU OF LA	AND MANAGEME	M LICOFIA		Expires: July 31, 1996
on MADS	UNDRY NOTICES AN	ND REPORTS ON	YMELLAR -5 AM	5. Lease Serial N	<del></del>
U3 MAIN at	De not use this form for pr pandoned well. Ыз∳∵orm (	oposals to drill or to re 3160-3 (APD) for such	pronosais	, 12	ee, or Tribe Name
SUBM! IN TRI	PLICATE- Other Instr	ructions on the rev	070 Lamingle	T I NAN BECA A	Agreement Designation
1. Type of Well	- Contract		erse side -	_	•
X Oil Well Gas Well	Other	1		8. Well Name and	i No. Ned
2. Name of Operator				- O5	ンプ SO CANYON 'B' #1
CHAPARRAL ENERGY  3a. Address	/, L.L.C.	. (4	05) 478-8770	9. API Wéli No.	20 0/11/01/ B #1
701 CEDAR LAKE BLV	D., OKLAHOMA CIT	3b. Phone No. <i>(inc</i> Y, OK 73114	clude area codej	10 Field and Poo	30-039-23521-S1
4. Location of Well (Footage, Sec., T., R., V SE/NVV OF SEC., 11-24	A., or Survey Description)		4.	GAL	1, or Exploratory Area  A Blanco P C
1660' FNL & 1840' FWI		,		11. County or Pari	
	COPRIATE BOX(S) TO	O INDICATE NATI	IDE OF NOTICE	RIO AR	RRIBA, NEW MEXICO
TYPE OF SUBMISSION	1	S INDICATE NATI	TYPE OF ACTION	REPORT, O	R OTHER DATA
X Notice of Intent	Acidize	Deepen			
	Altering Casing	Fracture Treat	Production ( Start/ Re		Vater Shut-off
Supsequent Recort	Casing Repair	New-Construction	Recomplete	一	Vell Integrity  Ither PLUG AND ARANDON
	Change Plans	Plug and abandon	Temperarily Abandon	·	ther PLUG AND ABANDON
Final Abandonment Notice	Convert to injection	Plug back	Water Disagge	_	
Describe Proposed or Completed Operal     If the proposal is to deepen directionally     Attach the Bond under which the work:					
lesting has been completed. Final Aban	Idenment Notice shall be filed only				
determined that the site is ready for fina	Linspection.)				14011195
Plan to plug well as follo	ws:				
0				Q 10 10 1	11237
Spot 100' Class B ceme	nt plug on top of exist	ting cast iron bridg	e plug at 6720' (Ga	ikup).	
Spot 100' plug across Pi	ictured Cliffiton at 327	: '5!	<u>[</u>	MA,	92000
				* C	<b>3 6</b>
Perforate 50' below surfa	ace casing (289') and	circulate cement t	o surface.		33. 3
			þ		
				V. Comment	- 34 3
				100 [7	9750
14 horony coatify the state					
14. I hereby certify that the toregoing is true at Name (Printed/ Typed)	na correct,	Title			
MICHAEL P. WARMACK		1	TONS ENGINEER		
Signature	. 4	Date	IONS ENGINEER		
Adjulate P. Rycein	540 fe	02/28/03			
Approved by	THIS SPACE	FOR FEDERAL OR S	TATE OFFICE USE		
		Division o	of Multi-Resou	Date	MAR 1 1 2003
Conditions of approval if any are attached. App certify that the applicant holds legal or equitable which would entitle the applicant to see a	a titla ta tianna samue			1000	1 7 7009
and this displication to conduct opt	erations thereon.	1			
Title 18 U.S.C. Section1001, makes it a coor fraudulent statements or representation	rime for any person knowingly	and willfully to make any o	department or agency of the	e United States a	ny false, fictitious
(Instructions on reverse)	A LI	risdiction.			

Php chaged

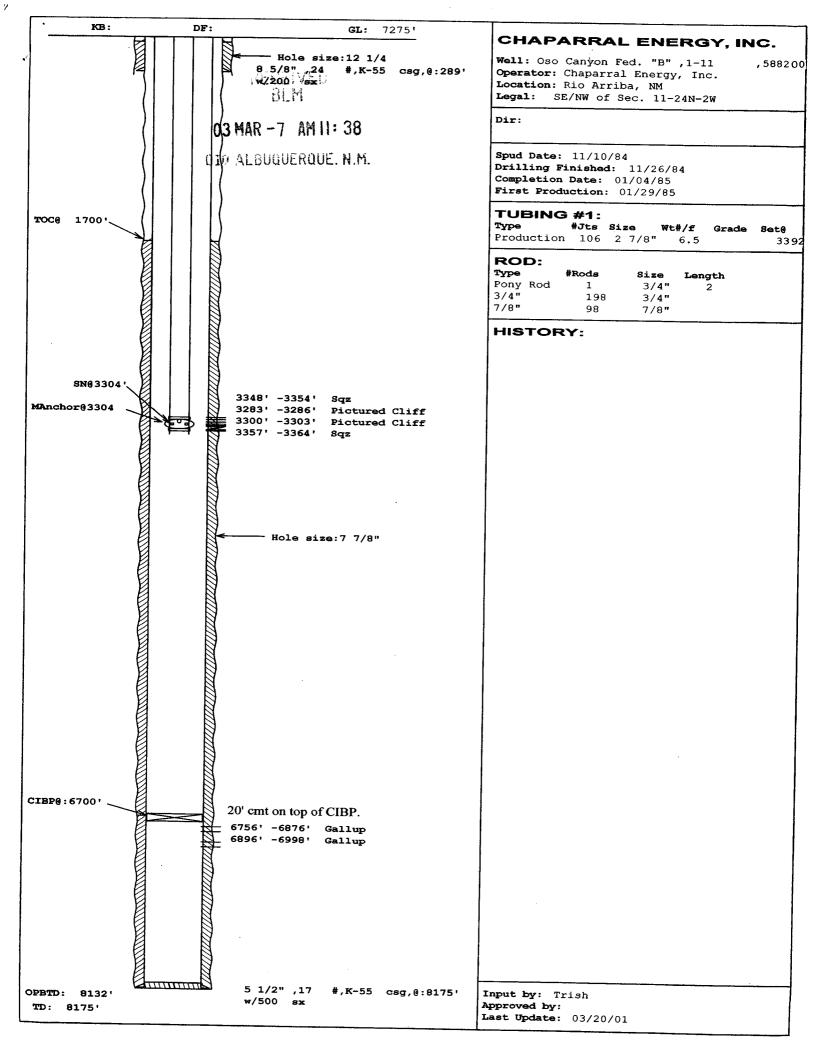

## UNITED STATES DEPARTMENT OF THE INTERIOR

## **BUREAU OF LAND MANAGEMENT** Albuquerque Field Office 435 Montano N.E. Albuquerque, New Mexico 87107

Company <u>Chaparral Energy, L.L.C</u>

Well No. Oso Canyon B #1

Location 1660' FNL & 1840' FWL Sec 11, T24N, R2W, NMPM

Lease No. NMNM 40635

**Government Contacts:** 

Bureau of Land Management, Albuquerque Field Office Office 505.761.8700

Steve Anderson, Assistant Field Manager 505.761.8982

Petroleum Engineer: Brian W. Davis Office 505.761.8756, Home 505.323-8698,

Pager 505.969.0146, Cell 505.249.7922,

Petroleum Engineering Technician: Al Yepa 505.289.3748 x 217 office and 505.321.4426 cell Alfonso Atencio 505.289.3748x218 office & 505.362.2843

BLM Geology / Environmental Contact:

Richard W Wilson, 505.761.8900

## **GENERAL REQUIREMENTS FOR** OIL AND GAS OPERATIONS ON FEDERAL AND INDIAN LEASES

- 1. Plugging operations authorized are subject to the "General Requirements for Permanent Abandonment of Wells on Federal and Indian Leases."
- 2. Blowout prevention equipment is required.
- 3. Changes to procedure

Plug No. 1 (6600-6700) - No Change @ 11 sxs Class B

Plug No. 2 (3290-3390) Increased to 17 sxs

Plug No. 3 (2850-2950) Added Plug to cover Ojo Alamo 17 sxs

Plug No. 4 (1650-1750) Added Plug to cover Nacimiento 17 sxs Plug No. 5 (Surface/Csg Shoe) Perf 50' below shoe 115 sxs (75 outside 40 Inside).

Refer to Surface Stips for restoration requirements.

- MV4m @ 5070 pm 5120-5020

1560-1510-1660