
State of New Mexico


District I	of New Mexico	<u> </u>
1625 N. French Dr., Hobbs, NM 88240 District II Finergy Miner:	of New Mickel	Form C-144 June 1, 2004
1301 W. Grand Avenue, Artesia, NM 88210	als and Natural Resources (A) 20	Julie 1, 2004
District III 1000 Ric Proces Read Agree NM 97410 Oil Cons	servation Division (505%)	or drilling and production facilities, submit to
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 So	State of New Mexico Form C-144 June 1, 2004 Artesia, NM 88210 Artesia, NM 87410 Citec, NM 87410 Citec, NM 87505 Santa Fe, NM 87505 State of New Mexico Form C-144 June 1, 2004 Form C-144 June 1, 2004 Appropriate NMOCD District Office. For downstream facilities, submit to Santa Fe Santa Fe, NM 87505 Santa Fe, NM 87505	
	a Fe, NM 87505	fice
	de Tank Registration or Clos	sire
·	nk covered by a "general plan"? Yes	
	or below-grade tank Closure of a pit or	
Operator: Burlington Resources Inc. Telephone:	505-326-9700 e-mail address: pclugston	Ohr inc com
Address: P.O. Box 4289, Farmington, NM 87499-4289	peragatori	Formation:
Facility or well name: San Juan 32-9 Unit #300S API #:	30-045-32562 U/L or Otr/Otr On@br- S	
		e Owner Federal X State Private Indian
Sun yaun Sun au		
Pit Type: Drilling X Production Disposal	Below-grade tank Volume: bbl Type of fluid:	
Workover Emergency	Construction material:	
Lined Unlined X	Double-walled, with leak detection? Yes If	If not, explain why not
Liner type: Synthetic Thickness mil Clay		,,,,
Pit Volume bbl		
	T 1 500	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet 50 feet or more, but less than 100 feet	(20 points) (10 points)
	100 feet or more	(0 points) 0
Wellhead protection area: (Less than 200 feet from a private domestic	Yes	(20 points)
water source, or less than 1000 feet from all other water sources.)	No	(0 points) 0
Distance to surface water: (horizontal distance to all wetlands, playas,	Less than 200 feet	(20 points)
irrigation canals, ditches, and perennial and ephemeral watercourses.)	200 feet or more, but less than 1000 feet	(10 points)
	1000 feet or more	(0 points) 0
	Ranking Score (Total Points)	0
If this is a pit closure: (1) attach a diagram of the facility showing the pit's rela	tionship to other equipment and tanks. (2) Indicate	e disposal location: (check the onsite box if
your are burying in place) onsite	y (3) Attach a g	eneral description of remedial action taken including
remediation start date and end date. (4) Groundwater encountered: No Yes If yes, show depth below ground surface ft. and attach sample results. (5)		
Attach soil sample results and a diagram of sample locations and excavations.	6). Pit closed on 1/17/05	
Additional Comments:		
See the cut and fill diagram provided with the APD for direct	ction and footages from wellhead.	
I hereby certify that the information above is true and complete to the best of m	knowledge and helief. I further certify that the	e shove described nit or below grade tank has
been/will be constructed or closed according to NMOCD guidelines ,		
Date: 1/17/2005		()
Printed Name/Title Sr Regulatory Specialist	Signature	MIST
Your certification and NMOCD approval of this application/closure does not re otherwise endanger public health or the environment. Nor does it relieve the op-		
regulations.	octation of its responsibility for compliance with any	y outer reueral, state, or rocal laws and/or
A1		
Approval: GENTY OL & GAS INSPECTOR, DIST. J	1 Jens	out the
Printed Name/Title	Signature Signature	Date on A T 2 200

BURLINGTON RESOURCES OIL & GAS COMPANY, LP SAN JUAN 32-9 UNIT #300S, 365' FSL & 585' FEL SECTION 11, T32N, R10W, NMPM, SAN JUAN COUNTY, NM GROUND ELEVATION: 6740' DATE: MAY 25, 2004



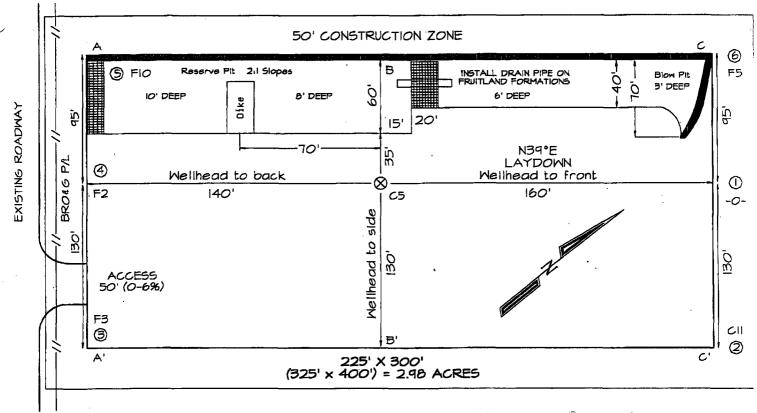

Reserve Pit Dike: to be B' above Deep side (overflow - 3' wide and 1' above shallow side). Blow Pit: overflow pipe halfway between top and bottom and to extend over plastic liner and into blow pit.

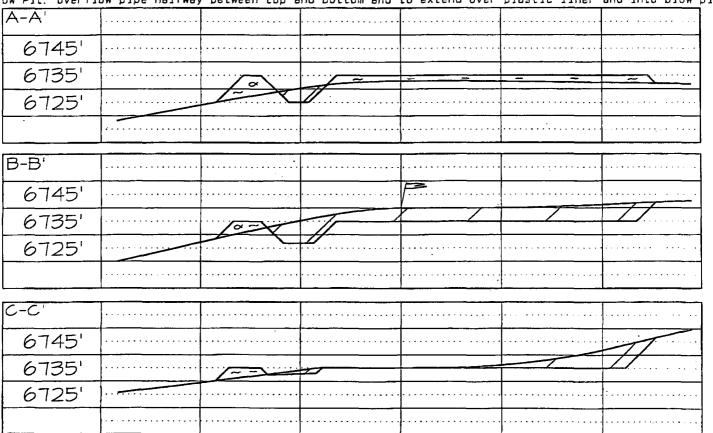

Note: Contractor should call One-Call for location of any marked or unmarked buried pipelines or cables on well pad and/or access road at least two (2) working days prior to construction