District I 1625 N. Freach Dr., Hybbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

## State of New Mexico **Energy Minerals and Natural Resources**

June 1, 2004


Form C-144

Santa Fe, NM 87505

Oil Conservation Division For drilling and production facilities, submit to appropriate NMOCD District Office.

For downstream facilities, submit to Santa Fe office

	de Tank Registration or Closu	
Is pit or below-grade tan	k covered by a "general plan"? Yes 🛭 No r below-grade tank 🗓 Closure of a pit or below-gra	⊠∮
Type of action: Registration of a pit of	r below-grade talik [1] Closure of a pit of below-grade	We talk 🖂
perator: Lance Oil & Gas Company, Inc. Telephone: 505		jbeckste@westerngas.com
Address: #31 CR 6500, P. O. Box 70, Kirtland, NM 87417		
'acility or well name: WF Federal 11 #1	API #:	Qtr/Qtr <u>H</u> Sec <u>11 T <b>30N</b> R <b>14W</b></u>
County: San Juan Latitude Longitude	NAD: 1927 🗖 1983 🗍 Surface O	wner Federal State Private Indian
<u>'it</u>	Below-grade tank	
Ype: Drilling ☑ Production ☐ Disposal ☐	Volume:bbl Type of fluid:	
Workover  Emergency	Construction material:	
ined 🛭 Unlined 🗍	Double-walled, with leak detection? Yes  If not, explain why not.	
iner type: Synthetic Thickness 12 mil Clay		
'it Volume 80 bbl		· · · · · · · · · · · · · · · · · · ·
Neath to resound souther (sentional distance from bottom of sit to consonal bish	Less than 50 feet	(20 points)
Pepth to ground water (vertical distance from bottom of pit to seasonal high	50 feet or more, but less than 100 feet	(10 points)
vater elevation of ground water.)	100 feet or more	( 0 points) <b>0</b>
Wellhood mentaction many (I am than 200 feet from a mirrota demontic	Yes	(20 points)
Vellhead protection area: (Less than 200 feet from a private domestic vater source, or less than 1000 feet from all other water sources.)	No	( 0 points) 0
Nictoria to surface material distance to all materials along	Less than 200 feet	(20 points)
Distance to surface water: (horizontal distance to all wetlands, playas,	200 feet or more, but less than 1000 feet	(10 points)
rigation canals, ditches, and perennial and ephemeral watercourses.)	1000 feet or more	( 0 points) <b>0</b>
	Ranking Score (Total Points)	0
If this is a pit closure: (1) attach a diagram of the facility showing the pit's	relationship to other equipment and tanks. (2) Indica	te disposal location: (check the onsite box if
your are burying in place) onsite 🛛 offsite 🔲 If offsite, name of facility	. (3) Attach a general of	description of remedial action taken including
remediation start date and end date. (4) Groundwater encountered: No 🛛 Y	es 🔲 If yes, show depth below ground surface	ft. and attach sample results. (5)
Attach soil sample results and a diagram of sample locations and excavations	3.	•
Additional Comments: Pit was closed according to NMOCD guidelines as they now exist modified by BLM liner cut-off requirements.		
I hereby certify that the information above is true and complete to the best of been/will be constructed or closed according to NMOCD guidelines , Date: 2/10/2005	f my knowledge and belief. I further certify that th a general permit □, or an (attached) alternative (	e above-described pit or below-grade tank has OCD-approved plan □.
Printed Name/Title Jo Becksted / Compliance Administrator	Signature	Socientral
Your certification and NMOCD approval of this application/closure does no otherwise endanger public health or the environment. Nor does it relieve the regulations.	t relieve the operator of liability should the contents of operator of its responsibility for compliance with an	of the pit or tank contaminate ground water or y other federal, state, or local laws and/or
		FEB 1 1 2000
Approval: CPUTY OIL & GAS INSPECTOR, DIST. (50)	_Signature	Date:

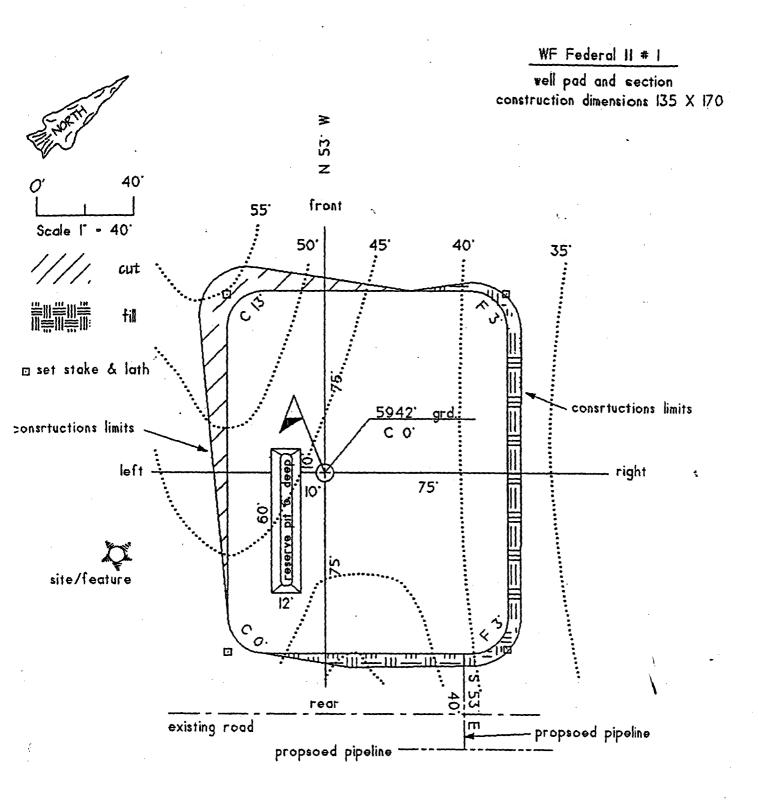

section