State of New Mexico Form C-101 1625 N. French Dr., Hobbs, NM 88240 Energy Minerals and Natural Resources May 27, 2004 1301 W. Grand Avenue, Artesia, NM 8821 Submit to appropriate District Office Oil Conservation Division District III 1000 Rio Brazos Road, Aztec, NM 8741 1220 South St. Francis Dr. ☐ AMENDED REPORT District IV Santa Fe, NM 87505 1220 S. St. Francis Dr., Santa Fe, NM 87505 APPLICATION FOR PERMIT RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE OGRID Number 167067 API Number ⁵ Property Name Riddle Gas Com Well No. #2S 10 Proposed Pool 2 9 Proposed Pool 1 **Basin Fruitland Coal Surface Location** Feet from the North/South line Feet from the East/West line UL or lot no. Section Township Range Lot Idn County 27N 09W 1,455 South 870' Fast San Juan ⁸ Proposed Bottom Hole Location If Different From Surface UL or lot no. Feet from the North/South line Feet from the East/West line Section Township County Additional Well Information 15 Ground Level Elevation 12 Well Type Code Cable/Rotary Work Type Code Lease Type Code 6.180 Rotary 18 Formation 19 Contractor ⁷ Proposed Depth ²⁰ Spud Date 16 Multiple No 2,475' Fruitland Coal **Stewart Brothers** Spring 2005 >100 feet Depth to Groundwater Distance from nearest fresh water well >1 mile Distance from nearest surface water > 1 mile Liner: Synthetic mils thick Clay Pit Volume: 1,000 bbls Drilling Method: Fresh Water Brine Diesel/Oil-based Gas/Air Closed-Loop System ²¹ Proposed Casing and Cement Program Setting Depth Hole Size Casing weight/foot Sacks of Cement Estimated TOC Casing Size 12-1/4" 8-5/8" 24.0#/ft 225' 150 sx Surface 7-7/8" 5-1/2" 15.5# 2,475' 325 sx Surface ²² Describe the proposed program. If this application is to DEEPEN or PLUG BACK, give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary. Surface: 150 sx Type III cement w/2% CC & 1/4# cello mixed @ 14.5 ppg, 1.41 cuft/sx. Circ cement to surf. Production: 225 sx (lead) Type III cement w/8% gel, 1/4#/sx cello mixed @ 11.9 ppg, 2.54 cuft/sx followed by 100 sx (tail) Type III cement w/1% CC & 1/4# cello mixed @ 14.5 ppg, 1.41 cuft/sx. Circ cement to surf. Final cement volumes will be 40% over open hole log volumes. Cement additives may change based on well conditions and availability of the additives. Cement densities will not be changed. BOP diagram is attached. ²³ I hereby certify that the information given above is true and complete to the OIL CONSERVATION DIVISION

Approved by:

Title

DEPUTY OF

Conditions of Approval Attached

& GAS INSPECTOR, DIST, AND

Expiration Date: F & B

best of my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines , a general permit , or an (attached) alternative OCD-approved plan .

Phone: 505 - 324 - 1090

Printed name:

Date: 2/8/05

Title: Drilling Engineer

E-mail Address: Jeff Patton@XTOEnergy.com

DISTRICT 1 1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT II 1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT: BI 1000 Rio Brazos Rd., Aztec, N.M. 87410

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Sonta Fe, NM 87505 Form C-102
Revised June 10, 2003
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

DISTRICT IV 1220 South St. Francis Dr., Santo Fe, NM 87505

		١	WELL L	OCATIO	N AND AC	REAGE DED	ICATION PL	_AT		
30-04	Number 3	787	871	*Pool Code		Basir	Pool Ham	tiona (oal	
Property Code			*Property Name					•	Well Number	
34634			RIDDLE GAS COM						2\$	
⁷ DGRID: No.	⁷ DGRID: No.		*Operator Name						* Elevation	
167067		XTO ENERGY INC.							.6180*	
					¹⁰ Surface	Location				
UL or lot no.	Section	Township	Ronge	Lot idn	Feet from the	North/South line	Feet from the	East/West line	County	
1	.9	27-N	9-W		1455	SOUTH	870	EAST	SAN JUAN	
11 Bottom Hole Location If Different From Surface										
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
Dedicated Acres			"Joint or Infilia		M Consolidation Code		©Order No.			
316.1	3 E	<u> </u>								
NO ALLOW	MARIF V	ALL RE	ASSIGNE	אד מד מ	IS COMPLETE	ON LINTH SALL	INTERESTS I	HAVE BEEN (CONSOLIDATED	

OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION 16 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and LAT: 38 35"11" N. (NAO 27) LONG: 107"47"14" W (NAO 2 (NAD 27) OTR. CORNER FD 2/1/2 BC U.S.C.LO. 1947 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plot was plotted from field notes of actual surveys made by on, and that the same is true 870 2004 668, 455 OTR. CORNER FD 2 1/2" BC U.S.G.L.O. 1947 SEC. CORNER FD 2 1/2" BC U.S.G.L.O. 1947 S 87-01-04 W Certificate Numb 2812.0 (M)


BOP SCHEMATIC FOR DRILLING OPERATIONS CLASS 1 (2M) NORMAL PRESSURE

1. Test BOP after installation:

Pressure test BOP to 200-300 psig (low pressure) for 5 min.

Test BOP to Working Press or to 70% internal yield of surf csg (10 min) or which ever is less.

2. Test operation of (both) rams on every trip.

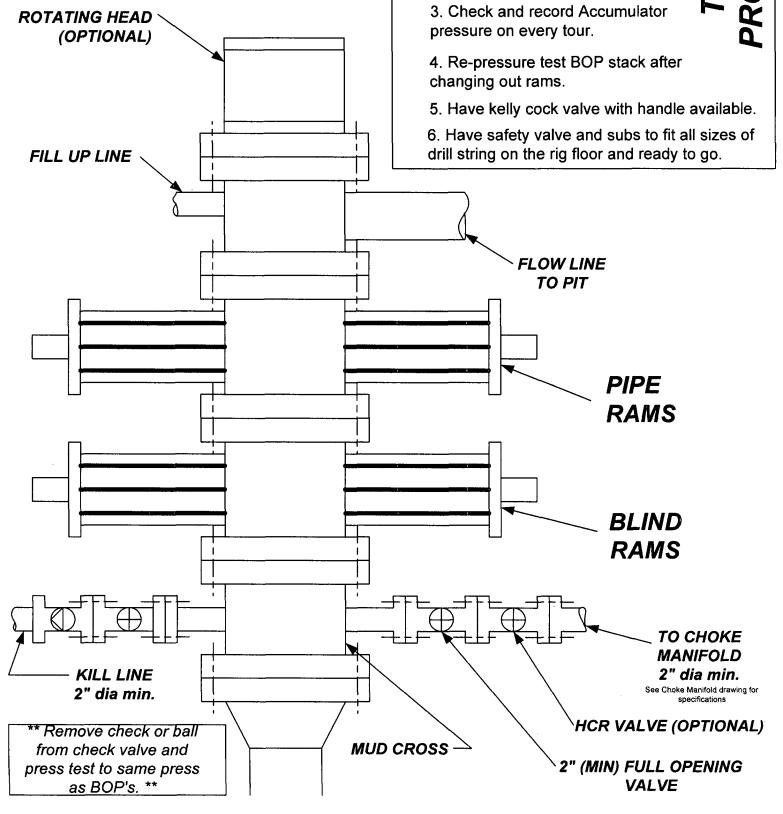

CHOKE MANIFOLD SCHEMATIC FOR DRILLING OPERATIONS CLASS 1 (2M) NORMAL PRESSURE

- 1. Stake all lines from choke manifold to pit.
- 2. Pressure test choke monifold after installation.
- 3. Pressure test manifold at the same time with the BOP Stack. Test manifold to the same test pressures.

TESTING PROCEDURE

