

RECEIVED

DEC 27 2010

FORM APPROVED
OMB No 1004-0137
Expires March 31, 2007

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Albuquerque Field Office
Bureau of Land Management

APPLICATION FOR PERMIT TO DRILL OR REENTER

RCVD JUN 10 '11
OIL CONS. DIV.
DIST. 3

1a. Type of work. <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NM-03554
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator XTO Energy Inc.		7. If Unit or CA Agreement, Name and No. N/A
3a. Address 382 CR 3100 Aztec, NM 87410	3b. Phone No. (include area code) 505/ 333-3100	8. Lease Name and Well No. BREECH C #244F
4. Location of Well (Report location clearly and in accordance with any State requirements *) At surface 1360' FNL x 2625' FEL At proposed prod zone Same		9. API Well No. 30-045- 039 - 31003
14. Distance in miles and direction from nearest town or post office* 33.6 miles NE of Bloomfield P.O.		10. Field and Pool, or Exploratory Basin DK/Blanco MV/Blanco TO
15. Distance from proposed* location to nearest property or lease line, ft (Also to nearest drg unit line, if any) 1360'		11. Sec, T R M or Blk and Survey or Area (G) Sec 14, T26N, R6W
16. No of acres in lease 1760	17. Spacing Unit dedicated to this well N/2 320	12. County or Parish RIO ARriba
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 1676'	19. Proposed Depth 7700'	13. State NM
20. BLM/BIA Bond No. on file UTB000138	21. Elevations (Show whether DF, KDB, RT, GL, etc) 6624' Ground Elevation	22. Approximate date work will start* 01/31/2011
23. Estimated duration 2 Weeks		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, shall be attached to this form:

- | | |
|---|--|
| 1 Well plat certified by a registered surveyor | 4 Bond to cover the operations unless covered by an existing bond on file (see Item 20 above) |
| 2 A Drilling Plan | 5 Operator certification |
| 3 A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office) | 6 Such other site specific information and/or plans as may be required by the authorized officer |

25. Signature <i>Malia Villers</i>	Name (Printed/Typed) Malia Villers	Date 12/22/10
---------------------------------------	---------------------------------------	------------------

Title
Permitting Tech.

Approved by (Signature) <i>[Signature]</i>	Name (Printed/Typed) AFM	Date 6/6/11
Title AFM	Office FEO	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon
Conditions of approval, if any, are attached

Title 18 USC Section 1001 and Title 43 USC Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*(Instructions on page 2)

NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT

JUN 23 2011

Av

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

NMOC

This section is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT II
1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
1220 South St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

DEC 27 2010

Form C-102

Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

Registration Field Office
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-039-31003	² Pool Code 71599	³ Pool Name Basin Dakota
⁴ Property Code 304751	⁵ Property Name BREECH C	⁶ Well Number 244F
⁷ OGRID No 5380	⁸ Operator Name XTO ENERGY INC.	⁹ Elevation 6624'


¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	14	26--N	6--W		1360	NORTH	2625	EAST	RIO ARriba

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres N/2 320			¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

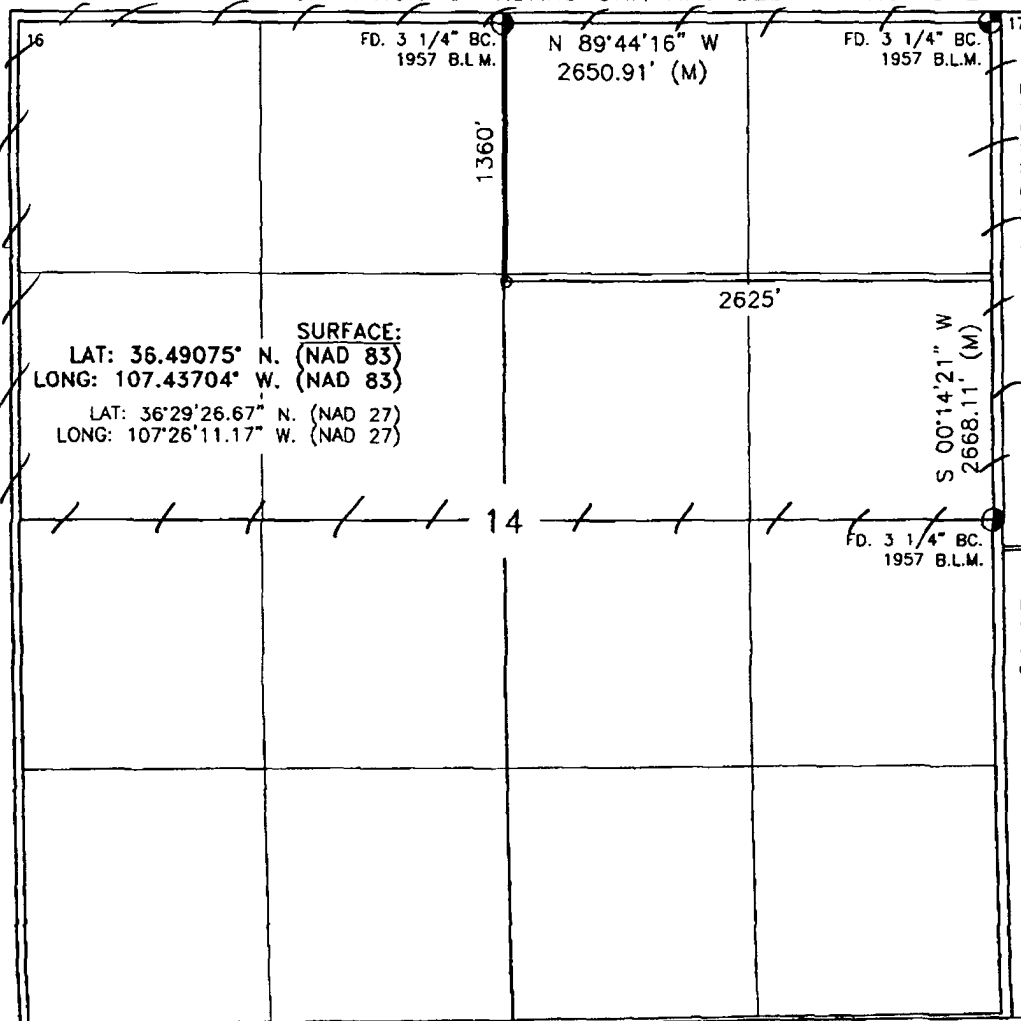

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division

Maria Villers 12/22/10
Signature Date

Maria Villers 12/22/10
Printed Name

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge & belief

NOV 14 2010
Date of Survey
Signature and Seal of Registered Professional Land Surveyor
8894
Certificate Number

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT II
1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
1220 South St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

Albuquerque Field Office
Bureau of Land Management

Form C-102

Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-039-31003	² Pool Code 7231A	³ Pool Name Blanco mesa verde
⁴ Property Code 304751	⁵ Property Name BREECH C	⁶ Well Number 244F
⁷ GRID No. 5380	⁸ Operator Name XTO ENERGY INC.	⁹ Elevation 6624'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	14	26-N	6-W		1360	NORTH	2625	EAST	RIO ARriba

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres N/2 320					¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16	FD. 3 1/4" BC. 1957 B.L.M.	N 89°44'16" W 2650.91' (M)	FD. 3 1/4" BC. 1957 B.L.M.	17
1360'		2625'	S 00°14'21" W 2668.11' (M)	
SURFACE: LAT: 36.49075° N. (NAD 83) LONG: 107.43704° W. (NAD 83) LAT: 36°29'26.67" N. (NAD 27) LONG: 107°26'11.17" W. (NAD 27)		14	FD. 3 1/4" BC. 1957 B.L.M.	

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division

Signature

Date

Malia Villers
Printed Name

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge & belief.

Date of Survey

Signature and Seal of Surveyor

Certificate Number

NOVEMBER 12, 2008

NEW MEXICO

REGISTERED PROFESSIONAL LAND SURVEYOR

8894

02-5-09

8894

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240

DISTRICT II
1301 W. Grand Ave., Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
1220 South St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

DEC 27 2010

Form C-102

Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-039-31003	² Pool Code 064160	³ Pool Name South Blanco Tocito
⁴ Property Code 304751	⁵ Property Name BREECH C	⁶ Well Number 244F
⁷ GRID No. 5380	⁸ Operator Name XTO ENERGY INC.	⁹ Elevation 6624'


¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	14	26-N	6-W		1360	NORTH	2625	EAST	RIO ARriba

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres N/2 320			¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

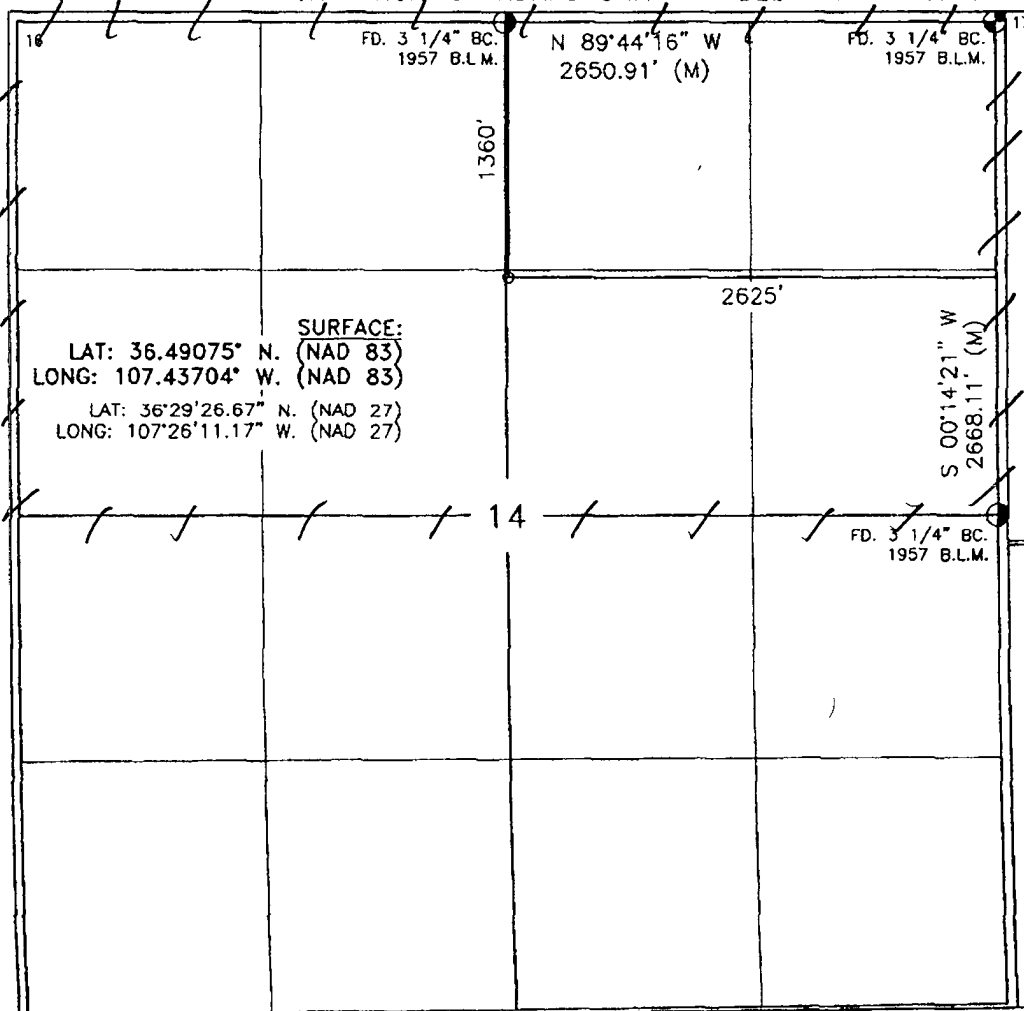

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division

Maria Villers 12/22/10
Signature Date

Maria Villers
Printed Name

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge & belief.

NOV 14 2010
Date of Survey
Signature and Seal of Surveyor
NEW MEXICO
REGISTERED PROFESSIONAL LAND SURVEYOR
8894
02-5-09
889
Certificate Number

XTO ENERGY INC.

Breach C #244F

APD Data

December 20, 2010

Location: 1360' FNL x 2625' FEL Sec 14, T26N, R6W County: Rio Arriba State: New Mexico

GREATEST PROJECTED TD: 7700'

OBJECTIVE: Basin Dakota / Tocito / Mesaverde

APPROX GR ELEV: 6624'

Est KB ELEV: 6636' (12' AGL)

1. MUD PROGRAM:

INTERVAL	0' to 360'	360' to 2500'	2500' to 7700'
HOLE SIZE	12.25"	7.875"	7.875"
MUD TYPE	FW/Spud Mud	LSND	LSND
WEIGHT	8.6-9.0	8.4-8.8	8.6- 9.8
VISCOSITY	28-32	28-32	45-70
WATER LOSS	NC	NC	6-8

Remarks: Use fibrous materials as needed to control seepage and lost circulation. Pump high viscosity sweeps as needed for hole cleaning. Raise viscosity at TD for logging. Reduce viscosity after logging for cementing purposes.

2. CASING PROGRAM:

Surface Casing: 8.625" casing to be set at \pm 360' in a 12.25" hole filled with 9.20 ppg mud

Interval	Length	Wt	Gr	Cplg	Coll Rating (psi)	Burst Rating (psi)	Jt Str (M-lbs)	ID (in)	Drift (in)	SF Coll	SF Burst	SF Ten
0'-360'	360'	24.0#	J-55	ST&C	1370	2950	244	8.097	7.972	7.950	17.13	28.24

Production Casing: 5.5" casing to be set at TD (\pm 7700') in 7.875" hole filled with a 9.20 ppg mud.

Interval	Length	Wt	Gr	Cplg	Coll Rating (psi)	Burst Rating (psi)	Jt Str (M-lbs)	ID (in)	Drift (in)	SF Coll	SF Burst	SF Ten
0'-7700	7700'	15.5#	J-55	ST&C	4040	4810	202	4.950	4.825	1.10	1.31	1.69

3. WELLHEAD:

- Casing Head: Larkin Fig 92 (or equivalent), 9" nominal, 2,000 psig WP (4,000 psig test) with 8-5/8" 8rnd thread on bottom and 11-3/4" 8rnd thread on top.
- Tubing Head: Larkin Fig 612 (or equivalent), 6.456" nominal, 2,000 psig WP (4,000 psig test), 5-1/2" 8rnd female thread on bottom (or slip-on, weld-on), 8-5/8" 8rnd thread on top.

4. **CEMENT PROGRAM (Slurry design may change slightly, but the plan is to circulate cement to surface on both casing strings):**

A. Surface: 8.625", 24.0#, J-55, ST&C casing to be set at $\pm 360'$ in 12-1/4" hole.

260 sx of Type V cement (or equivalent) typically containing accelerator and LCM, mixed at 15.8 ppg, 1.17 ft³/sk, & 5.01 gal wtr/sk.

Total slurry volume is 297 ft³, 100% excess of calculated annular volume to 360'.

B. Production: 5.5", 15.5#, J-55 (or K-55), ST&C casing to be set at $\pm 7700'$ in 7.875" hole. DV Tools set @ $\pm 6320'$ and @ $\pm 3230'$.

1st Stage

LEAD:

± 70 sx of Type V (or equivalent) typically containing dispersant, fluid loss additives, accelerator, & LCM mixed at 12.3 ppg, 2.36 ft³/sk, 12.95 gal wtr/sx.

TAIL:

100 sx Type V or Class 'G' cement typically containing accelerator, LCM, dispersant, & fluid loss additives mixed at 13.5 ppg, 1.81 cuft/sx, 8.85 gal/sx.

2nd Stage

LEAD:

± 245 of Type V (or equivalent) typically containing dispersant, fluid loss additives, accelerator, & LCM mixed at 12.3 ppg, 2.36 ft³/sk, 12.95 gal wtr/sx.

TAIL:

100 sx Type V or Class 'G' cement typically containing accelerator, LCM, dispersant, & fluid loss additives mixed at 13.5 ppg, 1.81 cuft/sx, 8.85 gal/sx.

3rd Stage:

LEAD:

± 255 sx of Type V (or equivalent) typically containing dispersant, fluid loss additives, accelerator, & LCM mixed at 12.3 ppg, 2.36 ft³/sk, 12.95 gal wtr/sx.

TAIL:

100 sx Type V or Class 'G' cement typically containing accelerator, LCM, dispersant, & fluid loss additives mixed at 13.5 ppg, 1.81 cuft/sx, 8.85 gal/sx.

Total estimated slurry volume for the 5-1/2" production casing is 1888 ft³.

Note: The slurry design may change slightly based upon actual conditions. Final cement volumes will be determined from the caliper logs plus 40%. It will be attempted to circulate cement to the surface.

5. LOGGING PROGRAM:

A. Mud Logger: None.

B. Open Hole Logs as follows: Run Array Induction/SFL/GR/SP fr/TD (7600') to the bottom of the surface csg. Run Neutron/Lithodensity/Pe/GR/Cal from TD (7600') to 2,500'.

6. FORMATION TOPS:

Est. KB Elevation: 6636'

FORMATION	Sub-Sea	MD	FORMATION	TV Sub-Sea	MD
Nacimiento	5252	1,384	Gallup	262	6,374
Ojo Alamo SS	4240	2,396	Greenhorn	-559	7,195
Kirtland Shale	4060	2,576	Graneros	-615	7,251
Fruitland Formation	3971	2,665	Dakota 1	-640	7,276
Lower Fruitland Coal	3608	3,028	Dakota 2	-684	7,320
Pictured Cliffs SS	3952	3,044	Dakota 3	-738	7,374
Lewis Shale	3457	3,179	Dakota 4	-775	7,411
Chacra SS	2701	3,935	Dakota 5	-820	7,456
Cliffhouse SS	1932	4,704	Dakota 6	-854	7,490
Menefee	1855	4,781	Burro Canyon	-923	7,559
Point Lookout SS	1362	5,274	Morrison	-965	7,601
Mancos Shale	1005	5,631	TD	-1064	7700

**** Maximum anticipated BHP should be <2,000 psig (<0.30 psi/ft) ****


7. COMPANY PERSONNEL:

Name	Title	Office Phone	Home Phone
Justin Niederhofer	Drilling Engineer	505-333-3199	505-320-0158
Bobby Jackson	Drilling Superintendent	505-333-3224	505-486-4706
John Klutsch	Project Geologist	817-885-2800	--

JN


12/20/10

XTO Energy		
3M Choke Manifold		

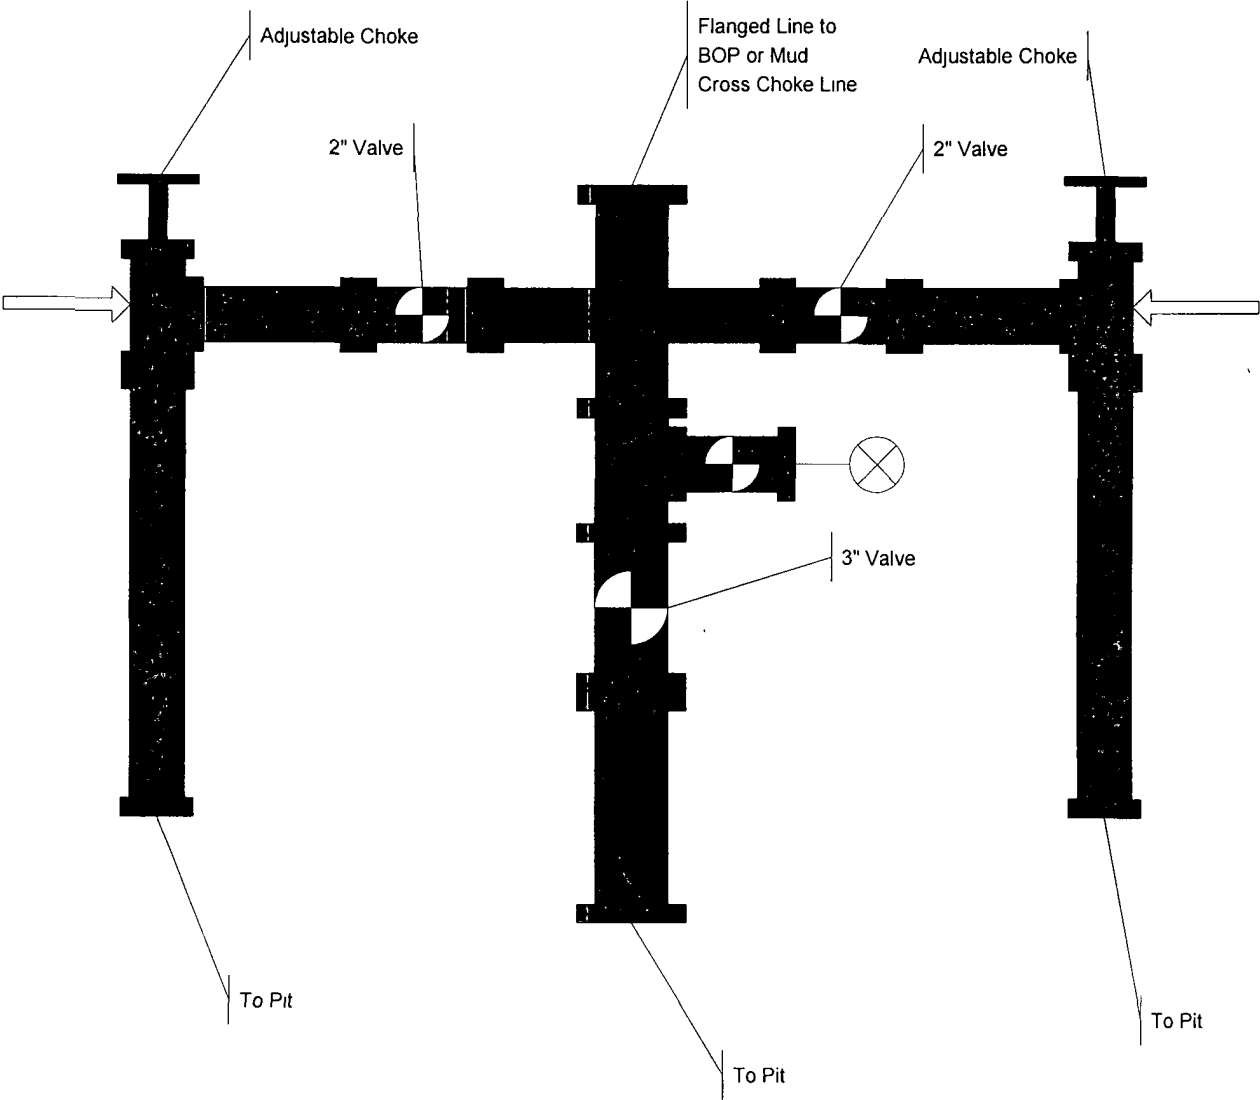

XTO Energy

3M BOP Stack

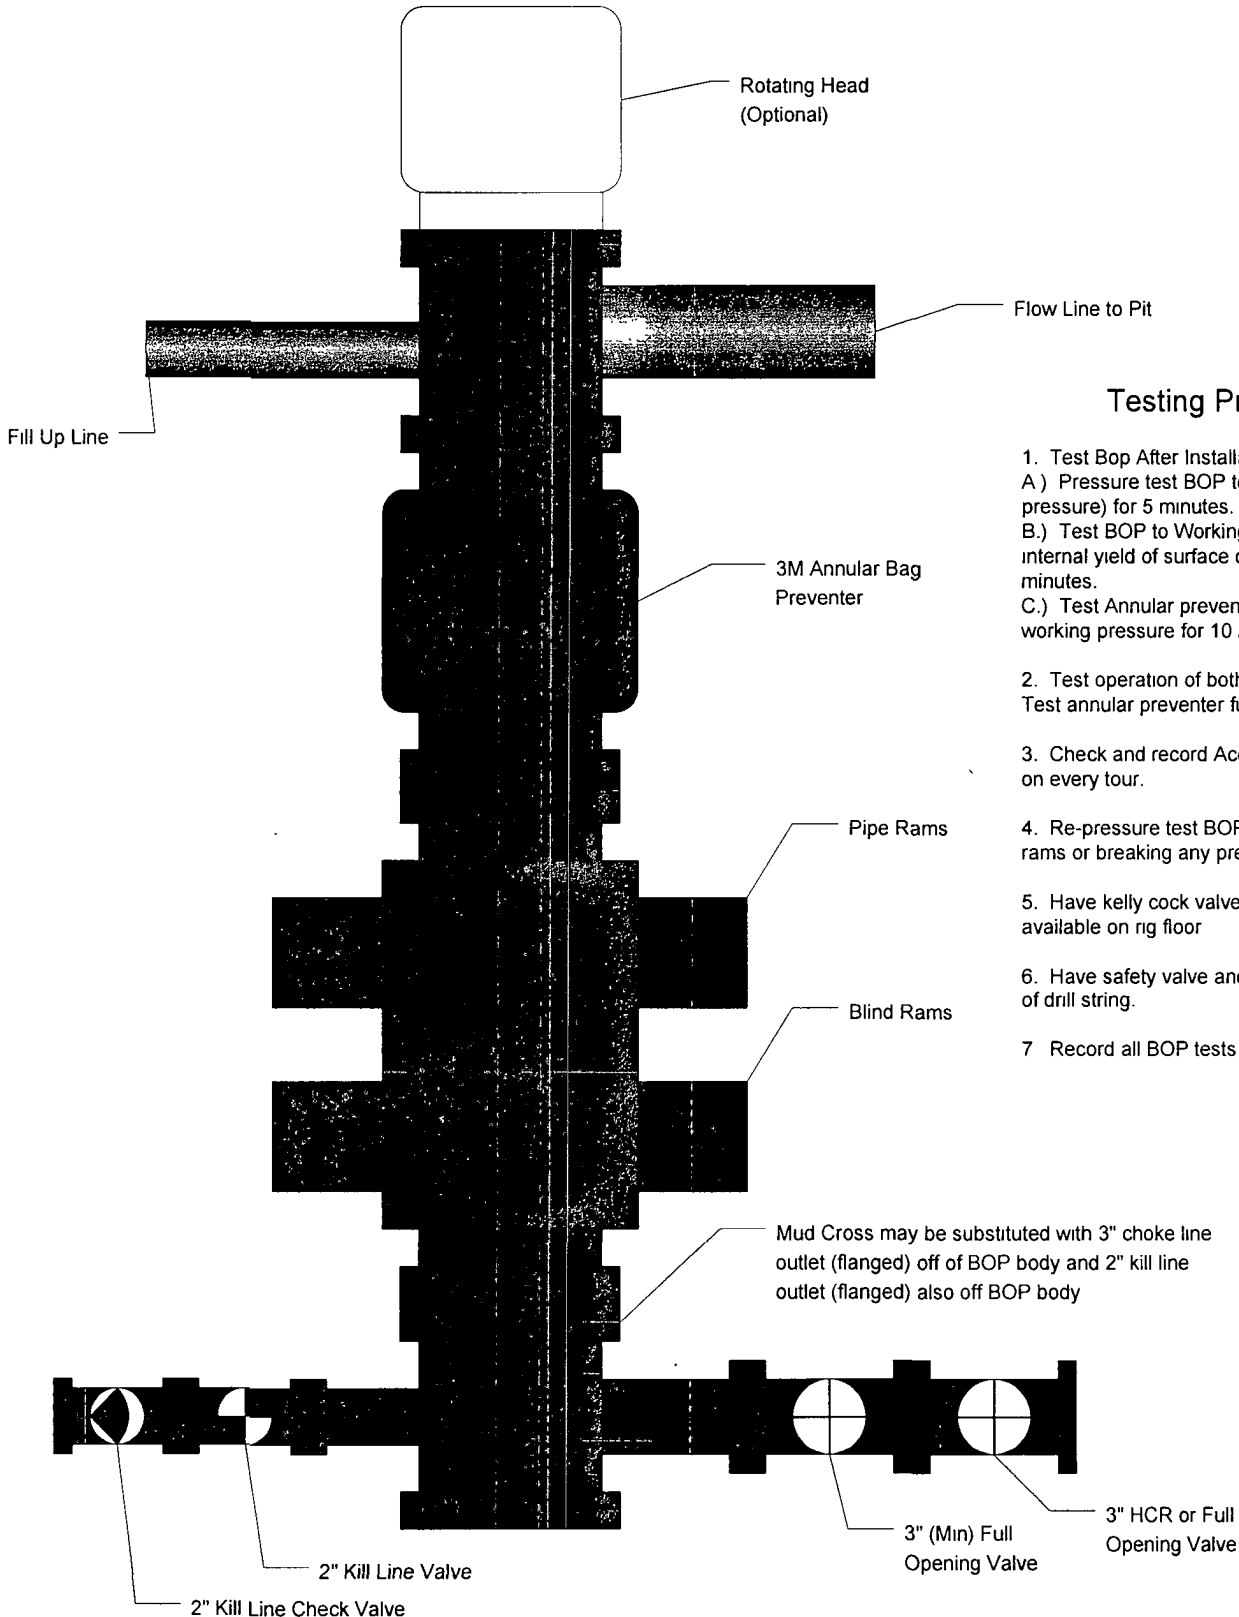

Testing Procedure

1. Test Bop After Installation.
 - A.) Pressure test BOP to 200-300 psig (low pressure) for 5 minutes.
 - B.) Test BOP to Working pressure or 70% internal yield of surface casing for 10 minutes.
 - C.) Test Annular preventer to 50% of working pressure for 10 minutes.
2. Test operation of both rams on each trip
Test annular preventer function weekly.
3. Check and record Accumulator pressure on every tour.
4. Re-pressure test BOP after changing rams or breaking any pressure tested seal.
5. Have kelly cock valve with handle available on rig floor
6. Have safety valve and subs to fit all sizes of drill string.
7. Record all BOP tests in IADC book.