Form C-144 Revised June 6, 2013

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 8750

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy

<u>District IV</u> 1220 S. St. Franci	is Dr., Santa Fe, NM 87505		Santa Fe, NM 87505		Environmental Bur to the appropriate I	eau office and pro NMOCD District (ovide a copy Office.
2615 39-27284			Below-Grade Tan		A1: a a ti	RECEIVED By OCD at 11:16 am	, Jan 27, 2015
39-27284		Below grade tank reg	ethod Permit or C		lan Applicati	<u>on</u>	
	or proposed alternat	Closure of a pit, belo Modification to an e Closure plan only su ive method	oposed alternative methors by grade tank, or proposition or registration in the proposition of the propositi	sed alternativ ation permitted or	non-permitted pit		nk,
			Form C-144) per individu				
lease be advised nvironment. No	that approval of this reque r does approval relieve the	st does not relieve the ope operator of its responsibil	erator of liability should oper ity to comply with any other	rations result in r applicable go	pollution of surface vernmental authority	water, ground water s rules, regulations	or or the or ordinances.
1. Operator: But	rlington Resources		OGRID #:	14538			
Address:			000.000.000				
AN ARTHUR PARTY OF THE PARTY OF							
1550	3003927284		D Permit Number:				
			30N Range 6W	County: Ric	o Arriba	ll .	
			Longitude107.41195				
Surface Owner	r: ☐ Federal ☒ State ☐	Private Tribal Trust	or Indian Allotment OCI	D NAD83	36.83128 107	7.43795	
2.		17 11 ND 44 C					
	section F, G or J of 19.15	.17.11 NMAC	Olas	ad Deian 4	o Classina Dia	<u> </u>	_
	Drilling Workover	Do A D M14			o Closure Pla		no
Permanent	Emergency Cavit	ation P&A With	i-Well Fluid Management				
		iicknessiiii] I VC [] O(_
String-Rei			Volume	bb	Dimensions: I	x W	x D
Liner Seams:	☐ Welded ☐ Factory	Otner	Volume: _	00	Dimensions. D	Α 11	
3.	de tank: Subsection I	of 19 15 17 11 NMAC					
		bbl Type of fluid:	Produced Water		_		
Volume:	ction material: N	50.0000 N. 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	110ddeed 11 mei				
			ewalls, liner, 6-inch lift an	d automatic o	verflow shut-off		
- None-Carlotte Control Carlot	67 CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC		Other				
			E □ PVC ☑ Other				
20000	IIICKIICSS <u>43</u>						
4. Alternativ							
		quired. Exceptions must	t be submitted to the Santa	Fe Environm	ental Bureau office	for consideration of	of approval.
5.	er of China Sprandolik 17 in gibbre some		STORAGE WAY WAS A STORAGE WAY		ando tankol		
			nanent pits, temporary pits			dance school ha	enital
Chain link		rands of barbed wire at f	top (Required if located wi	ının 1000 jeet	oj u permunent rest	aence, senoui, no	y errery



Alternate. Please specify

☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet

. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accepta material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	able source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No ☐ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☑ NA
	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	☐ Yes ☐ No
Society; Topographic map Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.97 Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the deattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.10 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9 NMAC 9.15.17.9 NMAC
11. Management Dit Cheeklist: Subsection R of 19 15 17 9 NMAC	
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the datached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 1 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	9.15.17.9 NMAC
Previously Approved Design (attach copy of design) All Number	-

2. Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc	cuments are
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan	
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan ☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
ns. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	70
Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☒ Below-grade Tank ☐ Multi-well Flui☐ Alternative Proposed Closure Method: ☒ Waste Excavation and Removal	id Management Pit
Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be at closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☑ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☑ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC ☑ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☑ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☑ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☑ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	tached to the
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. Planta 19.15.17.10 NMAC for guidance.	ce material are ease refer to
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

- Written confirmation or verification from the municipality; Written approva	l obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining	and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology Society; Topographic map	& Mineral Resources; USGS; NM Geological	☐ Yes ☐ No
Within a 100-year floodplain. FEMA map		☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Construction/Design Plan of Temporary Pit (for in-place burial of a drying property Protocols and Procedures - based upon the appropriate requirements of 19.15 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Disposal Facility Name and Permit Number (for liquids, drilling fluids and described Soil Cover Design - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	uirements of 19.15.17.10 NMAC Subsection E of 19.15.17.13 NMAC spropriate requirements of Subsection K of 19.15.17 ad) - based upon the appropriate requirements of 19.17.13 NMAC uirements of 19.15.17.13 NMAC 19.15.17.13 NMAC lrill cuttings or in case on-site closure standards cand H of 19.15.17.13 NMAC H of 19.15.17.13 NMAC	.11 NMAC .15.17.11 NMAC
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate Name (Print):		
Signature:	Date:	
Digitature		
e-mail address:		
e-mail address: 18. OCD Approval: Permit Application (including closure plan) Closure Plan	Telephone:	
e-mail address: 18. OCD Approval: Permit Application (including closure plan) Closure Plan	Telephone:	
e-mail address:	Telephone:	
e-mail address: 18. OCD Approval: Permit Application (including closure plan) Closure Planta OCD Representative Signature:	Telephone:	Mar 30, 2015
e-mail address: 18. OCD Approval: Permit Application (including closure plan) Closure Plantication	Telephone: Approval Date: Approval Date: NMAC of implementing any closure activities and submitting the completion of the closure activities. Please do no soure activities have been completed.	Mar 30, 2015 ng the closure report. not complete this

Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure require	report is true, accurate and complete to the best of my knowledge and ments and conditions specified in the approved closure plan.
Name (Print): Kenny Davis	Title: Staff Regulatory Technician
Signature:	Date:12/3/14
e-mail address: kenny.r.davis@conocophillips.com	Telephone: <u>505-599-4045</u>

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: SJ 30-6 Unit 443S

API No.: 3003927284

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- 1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

4. BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.



7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.1	250

8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.



www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

January 14, 2013

Crystal Tafoya ConocoPhillips San Juan Business Unit Office 214-05 5525 Hwy 64 Farmington, New Mexico 87401

RE:

Below Grade Tank Closure Report

San Juan 30-6 #433S Rio Arriba County, New Mexico

Dear Ms. Tafoya:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) San Juan 30-6 #433S, located in Rio Arriba County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name – San Juan 30-6 #433S
Legal Description – NW¼ NW¼, Section 11, T30N, R6W, Rio Arriba County, New Mexico
Well Latitude/Longitude – N36.83113 and W107.43817, respectively
BGT Latitude/Longitude – N36.83128 and W107.43795, respectively
Land Jurisdiction – Bureau of Land Management (BLM)
Figure 1. Topographic Site Location Map

rigure 1. Topographic site Location Map

Figure 2. Aerial Site Map, November 2012

1.2 NMOCD Ranking

Prior to site work, the New Mexico Oil Conservation Division (NMOCD) database was reviewed, and a C-103 form dated October 2004 for the San Juan 30-6 Unit #136 well located approximately 650 feet northeast of the location reported the depth to groundwater as less than 50 feet below ground surface (bgs). The New Mexico Office of the State Engineer (NMOSE) database was reviewed for nearby water wells, and no registered water wells were reported to be located within 1,000 feet of the location. Additionally, Google Earth and the New Mexico Tech Petroleum Recovery Research

Crystal Tafoya San Juan 30-6 #433S BGT Closure Report January 14, 2013 Page 2 of 5

Center online mapping tool (http://ford.nmt.edu/react/project.html) were accessed to aid in the identification of downgradient surface water.

Once on site, AES personnel further assessed the ranking using topographical interpretation, Global Positioning System (GPS) elevation readings, and visual reconnaissance. AES personnel concluded that depth to groundwater at the site was less than 50 feet bgs. An unnamed wash is located approximately 300 feet northwest of the location. Based on this information, the location was assessed a ranking score of 30.

1.3 BGT Closure Assessment

AES was initially contacted by Bruce Yazzie, CoP representative, on November 28, 2012, and on November 29, 2012, Deborah Watson and Kelsey Christiansen of AES met with a CoP representative at the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On November 29, 2012, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8021B;
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 1.7 ppm in S-4 up to 4.6 ppm in S-1. Field TPH concentrations were less than 20.0 mg/kg in each sample (S-1 through S-5). The field chloride concentration in SC-1 was 80 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results San Juan 30-6 #433S BGT Closure, November 2012

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
NMOCD Action L	evel (NMAC 19.	15.17.13E)	and the	100	250
S-1	11/29/12	0.5	4.6	<20.0	NA
S-2	11/29/12	0.5	2.0	<20.0	NA
S-3	11/29/12	0.5	1.9	<20.0	NA
S-4	11/29/12	0.5	1.7	<20.0	NA
S-5	11/29/12	0.5	3.6	<20.0	NA
SC-1	11/29/12	0.5	NA	NA	80

NA - not analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. The laboratory chloride

concentration was less than 30 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results
San Juan 30-6 #433S BGT Closure, November 2012

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.15	.17.13E)	0.2	50	1	00	250
SC-1	11/29/12	0.5	<0.050	<0.25	NA	NA	<30

NA - not analyzed

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations were below the NMOCD action level of 100 mg/kg, with concentrations reported below 20.0 mg/kg in each sample. Chloride concentrations in SC-1 were also below the NMOCD action level of 250 mg/kg. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Based on field screening and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended at the San Juan 30-6 #433S.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

Landrea Cupps

Environmental Scientist

Landre R. Cupps

Elizabeth McNally, P.E.


Elizabeth V MiNdly

Crystal Tafoya San Juan 30-6 #433S BGT Closure Report January 14, 2013 Page 5 of 5

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, November 2012 AES Field Screening Report 112912 Hall Analytical Report 1211A81

R:\Animas 2000\Dropbox\2013 Projects\ConocoPhillips\SJ 30-6 #433S\San Juan 30-6 #433S BGT Closure Report 011413.docx

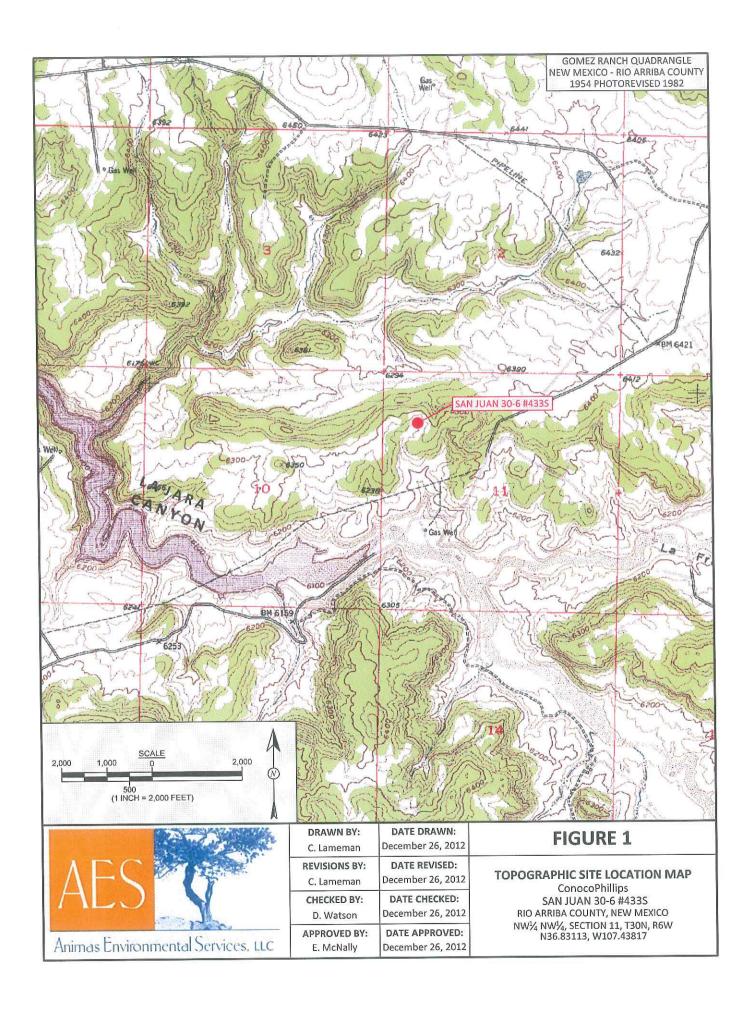




SAMPLE LOCATIONS

Sample ID	Date	OVM- PID (ppm)	TPH (mg/kg)	Chlorides (mg/kg)
NMOCD AC	TION LEVEL		100	250
S-1	11/29/12	4.6	<20.0	NA
S-2	11/29/12	2.0	<20.0	NA
S-3	11/29/12	1.9	<20.0	NA
S-4	11/29/12	1.7	<20.0	NA
S-5	11/29/12	3.6	<20.0	NA
SC-1	11/29/12	NA	NA	80

		Laborato	ry Analytico	al Results		
Sample ID	Date	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH - GRO (mg/kg)	TPH - DRO (mg/kg)	Chlorides (mg/kg)
NMOCD ACT	ION LEVEL	0.2	50	10	00	250
SC-1	11/29/12	<0.050	<0.25	NA	NA	<30

S-5-S-4 S-4 S-3 S-2 W107.43795

SAN JUAN 30-6 #433S MONUMENT



AERIAL SOURCE: © 2012 MICROSOFT CORPORATION - AVAILABLE EXCLUSIVELY BY DIGITALGLOBE

		70		
AF	3		E Sie	
1 NL				

I	DRAWN BY: C. Lameman	DATE DRAWN: December 26, 2012
	REVISIONS BY: C. Lameman	DATE REVISED: December 26, 2012
	CHECKED BY: D. Watson	DATE CHECKED: December 26, 2012
	APPROVED BY: E. McNally	DATE APPROVED: December 26, 2012

AERIAL SITE MAP BELOW GRADE TANK CLOSURE NOVEMBER 2012

ConocoPhillips SAN JUAN 30-6 #433S RIO ARRIBA COUNTY, NEW MEXICO NW½ NW½, SECTION 11, T30N, R6W N36.83113, W107.43817

AES Field Screening Report

Client: ConocoPhillips

Project Location: San Juan 30-6 #433S

Date: 11/29/2012

Matrix: Soil



Animas Environmental Services. LLC www.animasenvironmental.com 624 E. Comanche Farmington, NM 87401 505-564-2281

Durango, Colorado 970-403-3274

		Time of			Field	Field TPH				ТРН
	Collection	Sample	Sample	MVO	Chloride	Analysis	Field TPH*	TPH PQL		Analysts
Sample ID		Collection	Location	(mdd)	(mg/kg)	Time	(mg/kg)	(mg/kg)	DF	Initials
5-1	11/29/2012	12:28	North	4.6	NA	20:44	<20.0	20.0	1	DAW
	11/29/2012		South	2.0	NA	20:46	<20.0	20.0	1	DAW
5.3	11/29/2012		East	1.9	NA	20:50	<20.0	20.0	1	DAW
S-4	11/29/2012		West	1.7	NA	20:51	<20.0	20.0	Т	DAW
	11/29/2012		Center	3.6	NA	20:52	<20.0	20.0	П	DAW
SC-1	SC-1 11/29/2012	12:40	Composite	NA	80		Not,	Not Analyzed for TPH	H.	

Practical Quantitation Limit PQL Not Detected at the Reporting Limit

Not Analyzed N N AN

Dilution Factor

*Field TPH concentrations recorded may be below PQL.

Total Petroleum Hydrocarbons - USEPA 418.1 Analyst:

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with

Silver Nitrate



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

December 05, 2012

Debbie Watson
Animas Environmental Services
624 East Comanche
Farmington, NM 87401
TEL: (505) 486-4071
FAX

1 1 1 2 2

RE: CoP San Juan 30-6 #433S

OrderNo.: 1211A81

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 11/30/2012 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

John Caldwell

Supervisor

4901 Hawkins NE

Albuquerque, NM 87109

ahn Collwell

Analytical Report Lab Order 1211A81

Date Reported: 12/5/2012

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental Services

CoP San Juan 30-6 #433S

COF Sall Juan 30-0 #4

Lab ID: 1211A81-001

Project:

Client Sample ID: SC-1

Collection Date: 11/29/2012 12:40:00 PM

Matrix: MEOH (SOIL) Received Date: 11/30/2012 9:45:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed
EPA METHOD 8021B: VOLATILES					Analyst: NSB
Benzene	ND	0.050	mg/Kg	1	11/30/2012 12:54:23 PM
Toluene	ND	0.050	mg/Kg	1	11/30/2012 12:54:23 PM
Ethylbenzene	ND	0.050	mg/Kg	1	11/30/2012 12:54:23 PM
Xylenes, Total	ND	0.10	mg/Kg	1	11/30/2012 12:54:23 PM
Surr: 4-Bromofluorobenzene	102	80-120	%REC	1	11/30/2012 12:54:23 PM
EPA METHOD 300.0: ANIONS					Analyst: JRR
Chloride	ND	30	mg/Kg	20	11/30/2012 1:03:22 PM

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1211A81

05-Dec-12

Client:

Animas Environmental Services

Project:

CoP San Juan 30-6 #433S

Sample ID MB-5048

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

11/30/2012

Batch ID: 5048

RunNo: 7229

Analysis Date: 11/30/2012

SeqNo: 209559

Units: mg/Kg

HighLimit

%RPD

RPDLimit Qual

Analyte Chloride

Prep Date:

Result PQL ND 1.5

Sample ID LCS-5048

SampType: LCS Batch ID: 5048 TestCode: EPA Method 300.0: Anions

Client ID: LCSS

RunNo: 7229

SPK value SPK Ref Val %REC LowLimit

LowLimit

64.4

64.4

Prep Date: 11/30/2012 Analysis Date: 11/30/2012

14

Result

SPK value SPK Ref Val

SPK value SPK Ref Val

15.00

SeqNo: 209560 %REC

Units: mg/Kg

HighLimit %RPD 110

RPDLimit Qual

Analyte Chloride

Sample ID 1211A82-001BMS

SampType: MS

PQL

1.5

TestCode: EPA Method 300.0: Anions

Client ID:

BatchQC

Batch ID: 5048

RunNo: 7229

Units: mg/Kg

Prep Date:

11/30/2012

Analysis Date: 11/30/2012

SeqNo: 209562

%RPD **RPDLimit**

Qual S

Analyte Chloride

SPK value SPK Ref Val PQL Result 30 15.00 ND

%REC LowLimit 124

HighLimit 117

Sample ID 1211A82-001BMSD

SampType: MSD

TestCode: EPA Method 300.0: Anions

Client ID: BatchQC Batch ID: 5048

RunNo: 7229

Units: mg/Kg

117

HighLimit

Prep Date:

11/30/2012

Analysis Date: 11/30/2012

PQL

SeqNo: 209563

Analyte Chloride

Result ND 15.00 %REC LowLimit 124

%RPD 0 **RPDLimit** Qual

S 20

Qualifiers:

Value exceeds Maximum Contaminant Level.

Value above quantitation range E

Analyte detected below quantitation limits

Sample pH greater than 2

Analyte detected in the associated Method Blank B

Holding times for preparation or analysis exceeded H

Not Detected at the Reporting Limit ND

RPD outside accepted recovery limits

Page 2 of 3

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1211A81

05-Dec-12

Client:

Animas Environmental Services

Project:

CoP San Juan 30-6 #433S

Sample ID 5ML RB	SampT	уре: МЕ	BLK	Tes	TestCode: EPA Method 8021B: Volatiles							
Client ID: PBS	Batch	n ID: R7	211	F	RunNo: 7	211						
Prep Date:	Analysis D)ate: 11	1/30/2012	5	SeqNo: 2	09540	Units: mg/K	(g				
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual		
Benzene	ND	0.050										
Toluene	ND	0.050										
Ethylbenzene	ND	0.050										
Xylenes, Total	ND	0.10										
Surr: 4-Bromofluorobenzene	1.1		1.000		105	80	120					
Sample ID 100NG BTEX LCS	Samp ⁻	Гуре: LC	s	Tes	tCode: E	PA Method	8021B: Vola	tiles				
Client ID: LCSS	Batc	h ID: R7	7211	F	RunNo: 7	211						
Prep Date:	Analysis [Date: 1	1/30/2012		SeqNo: 2	09541	Units: mg/k	(g				

Sample ID 100NG BTEX	LCS SampT	ype: LC	S	Tes	tCode: El	PA Method	8021B: Volat	tiles		
Client ID: LCSS	Batcl	h ID: R7	211	F	RunNo: 7	211				
Prep Date:	Analysis D	Date: 11	/30/2012	5	SeqNo: 2	09541	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.97	0.050	1.000	0	97.2	76.3	117			
Toluene	0.99	0.050	1.000	0	99.1	80	120			
Ethylbenzene	0.99	0.050	1.000	0	99.2	77	116			
Xylenes, Total	3.0	0.10	3.000	0	99.5	76.7	117			
Surr: 4-Bromofluorobenzene	1.1		1.000		111	80	120			

Sample ID 1211A80-001AMS	SampT	ype: MS	3	Tes	Code: El	PA Method	8021B: Volat	tiles		
Client ID: BatchQC	Batcl	n ID: R7	211	F	RunNo: 7	211				
Prep Date:	Analysis D)ate: 11	1/30/2012	S	SeqNo: 2	09543	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.77	0.050	0.8022	0	96.2	67.2	113			
Toluene	0.77	0.050	0.8022	0	96.4	62.1	116			
Ethylbenzene	0.78	0.050	0.8022	0	97.3	67.9	127			
Xvlenes, Total	2.3	0.10	2.407	0	97.6	60.6	134			
Surr: 4-Bromofluorobenzene	0.85		0.8022		106	80	120			

Sample ID 1211A80-001AW	SD SampT	ype: MS	D	TestCode: EPA Method 8021B: Volatiles								
Client ID: BatchQC	Batch	1 ID: R7	211	F	RunNo: 7	211						
Prep Date:	Analysis D	ate: 11	/30/2012	5	SeqNo: 2	09544	Units: mg/K	(g				
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual		
Benzene	0.80	0.050	0.8022	0	99.6	67.2	113	3.54	14.3			
Toluene	0.80	0.050	0.8022	0	100	62.1	116	3.84	15.9			
Ethylbenzene	0.80	0.050	0.8022	0	100	67.9	127	3.01	14.4			
Xylenes, Total	2.4	0.10	2.407	0	102	60.6	134	4.22	12.6			
Surr: 4-Bromofluorobenzene	0.90		0.8022		112	80	120	0	0			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
 - RPD outside accepted recovery limits

Page 3 of 3



nun pavironmenus Anatysis Lutorator) 4901 Hawkins NE Albuquerque, NM 87105 TEL: 505-345-3975 FAX: 505-345-4107

Sample Log-In Check List

Website: www.hallenvironmental.com Work Order Number: 1211A81 Animas Environmental Client Name: Received by/date: 11/30/2012 9:45:00 AM Michelle Garcia Logged By: 11/30/2012 9:59:53 AM Mibelle Corne Michelle Garcia Completed By: Reviewed By: Chain of Custody Not Present ✓ Yes No D 1. Were seals intact? Yes M No Not Present 2. Is Chain of Custody complete? 3. How was the sample delivered? Courier Log In NA 🗌 Yes 🗸 No 🗌 4. Coolers are present? (see 19. for cooler specific information) Yes ☑ No □ NA 🗌 5. Was an attempt made to cool the samples? NA 🗆 Yes V No 6. Were all samples received at a temperature of >0° C to 6.0°C Yes V No 7. Sample(s) in proper container(s)? Yes 🗸 No 🗌 8 Sufficient sample volume for indicated test(s)? Yes ✓ No □ 9. Are samples (except VOA and ONG) properly preserved? NA 🗆 Yes No V 10. Was preservative added to bottles? Yes No No VOA Vials 11. VOA vials have zero headspace? Yes No V 12. Were any sample containers received broken? # of preserved Yes V No 13. Does paperwork match bottle labels? bottles checked (Note discrepancies on chain of custody) for pH: Yes V No (<2 or >12 unless noted) 14. Are matrices correctly identified on Chain of Custody? Adjusted? Yes V No 15. Is it clear what analyses were requested? Yes V No 16. Were all holding times able to be met? Checked by: (If no, notify customer for authorization.) Special Handling (if applicable) NA V 17. Was client notified of all discrepancies with this order? Yes No Date: Person Notified: eMail Phone Fax In Person Via: By Whom: Regarding: Client Instructions: 18. Additional remarks: 19. Cooler Information Cooler No Temp °C Condition Seal Intact Seal No Seal Date

Good

Client: Anjunas Environimental Services (12C Mailing Address; 024 E Comanche Phone #: 505 5642281	-			- International Control		2				
Servites 11/2 Mailing Address: 024 E	10 to 100 100	□ Standard Kiru	Ki Rush Same days		ANALYSIS	"IN L	_	200	ABORATORY	7
Mailing Address: 1024 E Ru/Mune by N Phone #: 505 516	WORNING TO THE PART OF THE PAR		0		ed www	www.hallenvironmental.com	ant.	COM		14
Phone #: 505 56	Coloranolos	CoP Sandran 30-6	50-6 #4338	4901 Hawkins NE	kins NE .	Albuquerque, NM 87109	erque,	NM 87	109	
05 5	M.W. 8740.	Project #:		Tel. 505-	Tel. 505-345-3975	Fax	505-345-4107	5-4107		
	564228				, t	Analysis	Request	st		
ellall of rash.		Project Manager:		(ƙjud		(*0	S			
QA/QC Package:	□ Level 4 (Full Validation)	D. Watson		(Gas c		3' [†] Od'	5 bCB			
Accreditation		Sampler: N. WAISOM	T No.	+ TPH	(1.40	8	808 \ s	(AC	orpr	***
□ EDD (Type)		्राध्यक्षात्रम् विद्या		18E	g po	etals			الرات	241
Date Time Matrix	Sample Request ID	ner F	ON TVERT OF PARTY OF THE PARTY	BTEX + MT	TPH (Meth ribM) BDB AN9) 01:68	RCRA 8 M	itse9 1808	OV) 80828 mə2) 0728	lo 0.00c	111 6 14
Se. 17.8	1-25-1	Medit Ico Medit	100-	×					オブ	
									WAIIBO	
									<u>.</u>	
				2 20						
					2				+	
							+	1	+	
							+	1		1
						430			+	
									-	
								П		
			4.7							
Date: Time: Reinquished by	In he Water	Received by:	Date Time	Remarks: Bull h Act Code C200		Coverof heleips have (D)	Phillips have (D. Kontecia	APECU	3	
Relinqu	led by:	Received by:	/ Date Time	100, 10 339726 Ane: 8	276	Supe	Supervision Itamia	Shale	-	

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141 Revised October 10, 2003 bmit 2 Copies to appropriate

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

Release Notification and Corrective Action

						OPERAT	FOR] Initial	Report	\boxtimes	Final Report
Name of Co	mpany Burl	lington Res	ources O	il & Gas Compa	ny C	Contact Dei	nise Journey			-		
Address 340	1 E. 30 th St	., Farmingt	on, NM		П	elephone N	lo. (505) 326-95	556				
Facility Nan	ne San Juai	n 30-6 Uni	433S		F	acility Typ	e Gas Well					
Surface Own	ner State			Mineral C	wner S	tate			Lease No	o. E-347-4	.9	
				LOCA	TION	OF REI	LEASE					
Unit Letter	Section	Township	Range	Feet from the		South Line	Feet from the	East/We	est Line	County		
D	36	30N	6W	1110	S	outh	1390	Ea	ıst	Rio Arrib	a	
				Latitude 36.76	478000	Longitude	-107.41195000	<u>)</u>				
				NAT	URE	OF RELI	EASE					
Type of Relea	ase Produced	d Fluids				Volume of	Release	154	Volume R	ecovered		
Source of Re	lease Below	Grade Tank					lour of Occurrenc	e i	Date and F	lour of Dis	covery	
Was Immedia	ate Notice Gi		Yes	No Not Re	equired	If YES, To	Whom?					
By Whom?		8 2 171	(1-2-1)	The state of the s		Date and F	Iour					
Was a Water	course Reach	ned?				ACATEMOTO 1507A-107 PG	olume Impacting t	he Water	course.			3
			Yes 🗵	No		3-47						
If a Watercou	ırse was Impa	acted, Descr	ibe Fully.	*		I.						
D 1 0	CD 11		J:_1 A _4:_	- T-1 *	1							
Describe Cause of Problem and Remedial Action Taken.* Below Grade Tank Closure Activities												
201011 01111												
Describe Are	a Affected as	nd Cleanup /	Action Tal	ken.*								
The regulate	ory standard	l for closure	at this si	te was determine			il samples were t					
							ards set forth in t		CD Guid	elines for F	Remedi	iation of
Lakes, Spills	s, and Releas	se; therefore	e no furth	er action is requ	ired. Ir	ie final repo	rt is attached for	review.				
				v . ▶v . ⊈Nation (1900)	4	1			1.1	277	lo an	
							knowledge and und perform correct					
							arked as "Final R					
							ion that pose a thr					
or the enviro	nment. In ad	dition, NMC	OCD accep	otance of a C-141	report de	oes not reliev	e the operator of	responsib	oility for co	ompliance v	vith an	y other
federal, state	, or local law	s and/or regi	ılations.									
			_				OIL CON	SERV	ATION	DIVISIO	<u>)N</u>	
Signature:	1 mus	()nun	4									
8			1			Approved by	District Supervis	or.				
Printed Nam	e: Denise Jo	ourney	V				osper 110					
Title: Staff R	Regulatory Te	echnician				Approval Da	te:	F	xpiration I	Date:		
Ž.						-FP.O.M.Du	35. 14	, 2				
E-mail Addr	ess: Denise.J	ourney@cor	ocophillij	ps.com	1	Conditions o	f Approval:			Attached		
Date: 1/22/2	2013	Phor	ie: (505) 3	26-9556							10 TO	

^{*} Attach Additional Sheets If Necessary



