District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

12628	Pit, Below-Grade Tank, or	RECEIVED By OCD at 11:51 am, Jan 27, 2015
45-07358	Proposed Alternative Method Permit or Closure Plan Application	
Please be advised the environment. Nor	Type of action: Below grade tank registration Permit of a pit or proposed alternative method Modification to an existing permit/or registration Or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative method at approval of this request does not relieve the operator of liability should operations result in pollution of surfaces approval relieve the operator of its responsibility to comply with any other applicable governmental author	pit, below-grade tank, ernative request ace water, ground water or the
1.	ngton Resources OGRID #: 14538	
	PO BOX 4289. Farmington, NM 87499	
Facility or well i	ame: <u>Hughes 1</u> 004507358 OCD Permit Number:	
API Number: 3	<u>B (NWNE)</u> Section <u>23</u> Township <u>28N</u> Range <u>11W</u> County: <u>San Juan</u>	
U/L or Qtr/Qtr	$\underline{B(NWNE)} \qquad \underline{Section _25} \qquad \underline{Fownship _26K} \qquad \underline{Range _11W} \qquad \underline{Section _25} \qquad \underline{Fownship _26K} \qquad \underline{Range _11W} \qquad \underline{Section _25} \qquad \underline{Fownship _26K} \qquad \underline{Range _11W} \qquad \underline{Section _25} \qquad \underline{Fownship _26K} \qquad Fownship _26K$	1983
Surface Owner	☐ Federal □ State □ Private □ Tribal Trust or Indian Allotment	
Sufface Owner.		
2.		
566.0	tion F, G or J of 19.15.17.11 NMAC	
Temporary:	Drilling Workover Closed Prior to Closure F	
Permanent [Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Dril	ling Fluid 🗌 yes 🗌 no
🗌 Lined 🔲 U	nlined Liner type: Thickness mil LLDPE HDPE PVC Other	
String-Reinf	orced	
Liner Seams:	Welded 🗌 Factory 🗋 Other Volume:bbl Dimensions: I	x Wx D
3. Below-grad	e tank: Subsection I of 19.15.17.11 NMAC	
	120 bbl Type of fluid: <u>Produced Water</u>	
	on material: <u>Metal</u>	
Secondary	containment with leak detection 🛛 Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	
	walls and liner 🗌 Visible sidewalls only 🗌 Other	
Liner type: Th	ckness <u>45</u> mil HDPE PVC Other <u>LLDPE</u>	
4.		
Alternative		
Submittal of an	exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau offi	ce for consideration of approval.
5.		
Fencing: Subs	ection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	ಜ್ಞಾ ವ್ಯಾಪ್ತ ಜ್ಞಾತ
	six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent is	residence, school, hospital,
institution or c .	<i>nurch)</i> sight, four strands of barbed wire evenly spaced between one and four feet	
Alternate.		
Alternate.		

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)

Screen Netting Other_

6.

7.

Monthly inspections (If netting or screening is not physically feasible)

Signs: Subsection C of 19.15.17.11 NMAC

🗌 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

Signed in compliance with 19.15.16.8 NMAC

8. Variances and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

- □ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.
- Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

9. <u>Siting Criteria (regarding permitting)</u> : 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	able source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; ☑ Data obtained from nearby wells	□ Yes⊠ No □ NA
<u>Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit.</u> NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ⊠ NA
 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality 	🗌 Yes 🗌 No
 Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	🗌 Yes 🗌 No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	Yes No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	🗌 Yes 🗌 No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark).	🗌 Yes 🛛 No
 Topographic map; Visual inspection (certification) of the proposed site 	
 Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🛛 No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
 Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No

 Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
Temporary Pit Non-low chloride drilling fluid	
 Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
 Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No
 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
 Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
10. <u>Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist</u> : Subsection B of 19.15.17.9 <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dattached.</i> Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.17 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 1 and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number:	9.15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of and 19.15.17.13 NMAC	
 Hydrogeologic Data - based upon the requirements of ranging (r) or permit Number: Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: 	

Instru	nament Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC uctions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docu	iments are
	 <i>hed.</i> Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H₂S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization 	
	 Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 	
<i>Inst</i> Typ	posed Closure: 19.15.17.13 NMAC tructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. be: □ Drilling □ Workover □ Emergency □ Cavitation □ P&A □ Permanent Pit ☑ Below-grade Tank □ Multi-well Flui □ Alternative □ Waste Excavation and Removal □ Waste Removal (Closed-loop systems only) □ On-site Closure Method (Only for temporary pits and closed-loop systems) □ In-place Burial □ On-site Trench Burial	d Management Pit
		tacked to the
	 aste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attasure plan. Please indicate, by a check mark in the box, that the documents are attached. △ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ○ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC ○ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ○ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ○ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ○ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
In. pr	ting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC structions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sourc ovided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. Pl 9.15.17.10 NMAC for guidance.	e material are ease refer to
Gı	round water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
G	 round water is between 25-50 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells 	☐ Yes ☐ No ☐ NA
	 round water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells 	☐ Yes ☐ No ☐ NA
la	 Attronuce of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa like (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	Yes No
	Vithin 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
a	Vithin 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence t the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
v	Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
l	Within 300 feet of a wetland. JS Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No
N	Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	
	Form C-144 Oil Conservation Division Page 4 c	01.0

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipal	lity; Written approval obtained from the municipality	🗌 Yes 🗌 No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the N	M EMNRD-Mining and Mineral Division	🗌 Yes 🗌 No
 Within an unstable area. Engineering measures incorporated into the design; NM Society; Topographic map 	/I Bureau of Geology & Mineral Resources; USGS; NM Geologica	al 🗌 Yes 🗌 No
Within a 100-year floodplain. - FEMA map		🗌 Yes 🗌 No
by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upor Proof of Surface Owner Notice - based upon the appropriate Construction/Design Plan of Burial Trench (if applicable) Construction/Design Plan of Temporary Pit (for in-place) Protocols and Procedures - based upon the appropriate r Confirmation Sampling Plan (if applicable) - based upon	n the appropriate requirements of 19:15:17:13 NMAC le) based upon the appropriate requirements of Subsection K of 19 e burial of a drying pad) - based upon the appropriate requirements requirements of 19:15:17:13 NMAC in the appropriate requirements of 19:15:17:13 NMAC riate requirements of 19:15:17:13 NMAC s, drilling fluids and drill cuttings or in case on-site closure standar ments of Subsection H of 19:15:17:13 NMAC	0.15.17.11 NMAC s of 19.15.17.11 NMAC
^{17.} <u>Operator Application Certification</u> : I hereby certify that the information submitted with this appli Name (Print):	ication is true, accurate and complete to the best of my knowledge Title:	b
Signature:	Date:	
e-mail address:		
	plan) 🖾 Closure Plan (only) 🗌 OCD Conditions (see attachn Approval Date: OCD Permit Number:	nent) Apr 15, 2015
19. Closure Report (required within 60 days of closure comp	a closure plan prior to implementing any closure activities. Plea	
20. <u>Closure Method</u> : ⊠ Waste Excavation and Removal □ On-Site Closure I □ If different from approved plan, please explain.	Method 🗌 Alternative Closure Method 🗌 Waste Removal	(Closed-loop systems only)

 22. Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure required. 	Tements and conditions of the set of the
Name (Print): Kenny Davis	Title: <u>Staff Regulatory Technician</u>
Signature:	Date: <u>12/10/14</u>
e-mail address: kenny.r.davis@conocophillips.com	Telephone: <u>505-599-4045</u>

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: Hughes 1 API No.: 3004507358

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

4. BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.1	250

8. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

 If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.



November 8, 2010

Project No. 92115-1471

Ms. Kelsi Harrington ConocoPhillips 3401 East 30th Street Farmington, New Mexico 87401

Phone: (505) 599-3403

RE: BELOW GRADE TANK CLOSURE DOCUMENTATION FOR THE HUGHES #1 (HBR) WELL SITE, SAN JUAN COUNTY, NEW MEXICO

Dear Ms. Harrington,

Enclosed please find the field notes and analytical results for below grade tank (BGT) closure activities conducted at the Hughes #1 (hBr) well site located in Section 23, Township 28N, Range 11W, San Juan County, New Mexico. On October 18, 2010, one (1) five (5)-point composite sample was collected from directly beneath the former BGT; see enclosed *Field Notes*. The sample was analyzed in the field for total petroleum hydrocarbons (TPH) using USEPA Method 418.1, for organic vapors using a photoionization detector (PID), and for chlorides. Additionally, the sample was placed into a four (4)-ounce glass jar, capped headspace free, and transported on ice under chain of custody, to Envirotech's Analytical Laboratory to be analyzed for TPH using USEPA Method 8015, for benzene and BTEX using USEPA Method 8021 and for total chlorides using USEPA Method 4500. The sample returned results below the regulatory standards for TPH, benzene, BTEX and chlorides, confirming a release did not occur; see enclosed *Analytical Results*.

We appreciate the opportunity to be of service. If you have any questions or require additional information, please contact our office at (505) 632-0615.


Respectfully Submitted, ENVIROTECH, INC.

Rene García-Reyes

Rene Garcia-Keyes Senior Environmental Field Technician rgarcia@envirotech-inc.com

Enclosures: Field Notes Analytical Results

Cc: Client File No. 92115

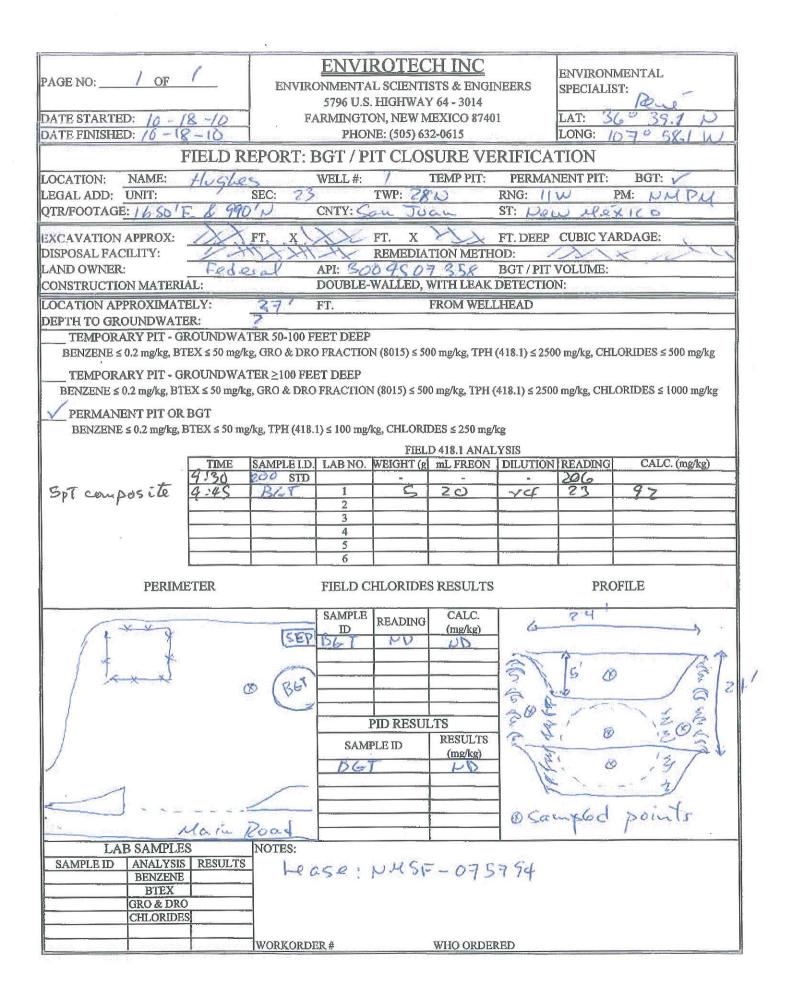



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	92115-1471
Sample No .:	1	Date Reported:	10/21/2010
Sample ID:	Beneath BGT	Date Sampled:	10/18/2010
Sample Matrix:	Soil	Date Analyzed:	10/18/2010
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons	92	5.0
-------------------------------------	----	-----

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978.

Comments: Hughes #1 (hBr)

Instrument calibrated to 200 ppm standard. Zeroed before each sample

Analyst

ninho Review

Rene Garcia Printed

Toni McKnight
Printed



CONTINUOUS CALIBRATION EPA METHOD 418.1 TOTAL PETROLEUM **HYDROCARBONS**

18-Oct-10 Cal. Date: Concentration Standard Reading Concentration mg/L Parameter mg/L 100 TPH 200 206 500 1000

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

Analyst

Rene Garcia **Print Name**

121

Review

Inight

Toni McKnight Print Name

10/21/2010

10/21/2010

Date

Date



Field Chloride

Client:	ConocoPhillips	Project #:	92115-1471
Sample No.:	1	Date Reported:	10/21/2010
Sample ID:	Beneath BGT	Date Sampled:	10/18/2010
Sample Matrix:	Soil	Date Analyzed:	10/18/2010
Preservative:	Cool	Analysis Needed:	Chloride
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Field Chloride	ND	33.0

ND = Parameter not detected at the stated detection limit.

References: "Standard Methods for the Examination of Water and Wastewater", 18th ed., 1992 Hach Company Quantab Titrators for Chloride

Comments: Hughes #1 (hBr)

Analyst

Rene Garcia Printed

Milnight Review

Toni McKnight Printed



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

×

Client:	ConocoPhillips	Project #:	92115-1471
Sample ID:	BGT	Date Reported:	10-19-10
Laboratory Number:	56244	Date Sampled:	10-18-10
Chain of Custody No:	10550	Date Received:	10-18-10
Sample Matrix:	Soil	Date Extracted:	10-18-10
Preservative:	Cool	Date Analyzed:	10-19-10
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	. ND	0.1
otal Petroleum Hydrocarbons	ND	

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Hughes #1 (hBr)/BGT Closure

Analyst

Review



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

		Crank			
Client:	QA/QC		Project #:		N/A
Sample ID:	10-19-10 QA/0	QC	Date Reported:		10-19-10
Laboratory Number:	56224		Date Sampled:		N/A
Sample Matrix:	Methylene Chlor	ride	Date Received:		N/A
Preservative:	N/A		Date Analyzed:		10-19-10
Condition:	N/A		Analysis Reque	sted:	TPH
	I-Cal Date:	I-Cal RF:	C-Cal.RF:	% Difference	Accept. Range.
Gasoline Range C5 - C10	10-19-10	9.9960E+002	1.0000E+003	0.04%	0 - 15%
Diesel Range C10 - C28	10-19-10	9.9960E+002	1.0000E+003	0.04%	0 - 15%
Blank Conc. (mg/L - mg/Kg)		Concentration		Detection Limit	1
Gasoline Range C5 - C10		ND		0.2	
Diesel Range C10 - C28		ND		0.1	
Duplicate Conc. (mg/Kg)	Sample	Duplicate	%.Difference	Accept. Range	1
Gasoline Range C5 - C10	2.1	2.3	9.5%	0 - 30%	ay
Diesel Range C10 - C28	185	195	5.2%	0 - 30%	
Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
Gasoline Range C5 - C10	2.1	250	280	111%	75 - 125%
Diesel Range C10 - C28	185	250	499	115%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 56224-56231, 56244

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips		Project #:	92115-1471	
Sample ID:	BGT		Date Reported:	10-19-10	
Laboratory Number:	56244		Date Sampled:	10-18-10	
Chain of Custody:	10550		Date Received:	10-18-10	
Sample Matrix:	Soll		Date Analyzed:	10-19-10	
Preservative:	Cool		Date Extracted:	10-18-10	
Condition:	Intact		Analysis Requested:	BTEX	
			Dilution:	10	
				Det.	
		Concentration		Limit	1
Parameter		(ug/Kg)		(ug/Kg)	
<u>.</u>					
Benzene		ND		0.9	
Toluene		1.2		1.0	
Ethylbenzene		ND		1.0	
p,m-Xylene		2.6		1.2	
o-Xylene		3.6		0.9	
		7.4			
Total BTEX					

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	101 %
	1,4-difluorobenzene	95.4 %
	Bromochlorobenzene	94.5 %

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Comments: Hughes #1 (hBr)/BGT Closure

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A		Project #:		N/A
Sample ID:	1019BBLK QA/QC		Date Reported:		10-19-10
Laboratory Number:	56244		Date Sampled:		N/A
Sample Matrix:	Soll		Date Received:		N/A
Preservative:	N/A		Date Analyzed:		10-19-10
Condition:	N/A		Analysis:		BTEX
			Dilution:		10
Calibration and	I-Cal RF:	C-Cal RF:	%Diff	Blank	Detect.
Detection Limits (ug/L)		Accept. Ra	nge 0 16%	Cono	Limit
Benzene	5.4357E+005	5.4466E+005	0.2%	ND	0.1
Toluene	5.9480E+005	5.9599E+005	0.2%	ND	0.1
Ethylbenzene	5.5766E+005	5.5878E+005	0.2%	ND	0.1
p,m-Xylene	1.3390E+006	1.3417E+006	0.2%	ND	0.1
o-Xylens	5.0982E+005	5.1085E+005	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample	Duplicate	%Diff.	Accept Range	Detect. Limit
Benzene	ND	ND	0.0%	0 - 30%	0.9
Toluene	1.2	1.5	25.0%	0 - 30%	1.0
Ethylbenzene	ND	ND	0.0%	0 - 30%	1.0
p,m-Xylene	2.6	2.2	15.4%	0 - 30%	1.2
o-Xylene	3.6	3.6	0.0%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample	Amount Spiked	Spiked Sample	% Recovery	Accept Range
Benzene	ND	500	510	102%	39 - 150
Toluene	1.2	500	533	106%	46 - 148
Ethylbenzene	ND	500	509	102%	32 - 160
p,m-Xylene	2.6	1000	1,120	112%	46 - 148
o-Xylene	3.6	500	515	102%	46 - 148

ND - Parameter not detected at the stated detection limit.

Dilution: Spike and spiked sample concentration represent a dilution proportional to sample dilution.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments: QA/QC for Samples 56244

Analyst

an Review



Chloride

Client:	ConocoPhillips	Project #:	92115-1471
Sample ID:	BGT	Date Reported:	10-19-10
Lab ID#:	56244	Date Sampled:	10-18-10
Sample Matrix:	Soil	Date Received:	10-18-10
Preservative:	Cool	Date Analyzed:	10-19-10
Condition:	Intact	Chain of Custody:	10550

Parameter

Total Chloride

25

Concentration (mg/Kg)

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Hughes #1 (hBr)/BGT Closure

Analyst

CHAIN OF CUSTODY RECORD

Project Name / Location: Client: ANALYSIS / PARAMETERS COPC Hughes#1 (hbr) / BGT Closures Sampler Name: BTEX (Method 8021) **Client Address:** TPH (Method 8015) VOC (Method 8260) René García Reyes **RCRA 8 Metals TCLP with H/P** Cation / Anion Sample Intact Client No.: TPH (418.1) Sample Cool **Client Phone No.:** CHLORIDE 92115 - 1471 No./Volume Preservative Sample No./ Sample Sample Sample PAH RCI Lab No. of Containers HgC, HCI Matrix Identification Date Time (Soil) Sludge X 10-18-10 9:45 56244 X X BGt 402 Solid Aqueous Sludge Soil Solid Aqueous Soil Sludge Solid Aqueous Time Received by: (Signature) Date Relinguished by: (Signature) Date Time 10/18/10/10:30 10-18-10 10:30 Aun PRR Grandy Received by: (Signature) Relinquished by: (Signature) Relinquished by: (Signature) Received by: (Signature) envirotech **Analytical Laboratory** 5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com

ACCENT Printing . Form 28-0807

10550

11

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141 Revised October 10, 2003

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

1220 S. St. Francis Dr., Santa Fe, NM 87505 Santa Fe	, NM 87505	side of form		
	and Corrective Action			
	OPERATOR	🗌 Initial Report 🛛 Final Report		
Name of Company Burlington Resources	Contact Kenny Davis			
Address 3401 East 30 th St. Farmington, NM	Telephone No.(505) 599-4045			
Facility Name: Hughes 1	Facility Type: Gas Well			
Surface Owner Federal Mineral Owner	Federal	Lease No. SF-075794		
	N OF RELEASE			
		Vest Line County		
Unit Letter Section Township Range Feet from the North B 23 28N 11W 990 North	1650 East	San Juan		
	Longitude-107.96930000			
	OF RELEASE			
Type of Release BGT Closure Summary	Volume of Release N/A	Volume Recovered N/A		
Source of Release: NONE	Date and Hour of Occurrence N/A	Date and Hour of Discovery N/A		
Was Immediate Notice Given?	If YES, To Whom?			
Yes No X Not Required	N/A	2		
By Whom? N/A	Date and Hour N/A	ercourse		
Was a Watercourse Reached?	If YES, Volume Impacting the Watercourse. N/A			
	1			
If a Watercourse was Impacted, Describe Fully.*				
N/A				
Describe Cause of Problem and Remedial Action Taken.*				
N/A				
Describe Area Affected and Cleanup Action Taken.*				
BGT Closure: NO RELEASE FOUND UPON REMOVAL				
I hereby certify that the information given above is true and complete to	the best of my knowledge and underst	and that pursuant to NMOCD rules and		
regulations all operators are required to report and/or file certain release public health or the environment. The acceptance of a C-141 report by t				
	ate contamination inal pose a uncal lu	giound water, surface water, numan nearth		
or the environment. In addition, NMOCD acceptance of a C-141 report	does not relieve the operator of respon	sibility for compliance with any other		
federal, state, or local laws and/or regulations.		VATION DIVISION		
40	<u>OIL CONSER</u>	VATION DIVISION		
Signature:				
Approved by District Supervisor:				
Printed Name: Kenny Davis				
Title: Staff Regulatory Technician	Approval Date:	Expiration Date:		
E-mail Address: Kenny.r.davis@conocophillips.com	Conditions of Approval:	Attached		
Date: 12/11/14 Phone: (505) 599-4045				

* Attach Additional Sheets If Necessary





