District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

71 7	
Pit, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application	
Type of action: Below grade tank registration RECEIVE	
45-32525 Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, bel or proposed alternative method	ow-grade tank,
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative	e request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rule.	
1. Operator: Burlington Resources Oil & Gas Company, LP OGRID #:14538	BGT CLOSED
Address: PO BOX 4289, Farmington, NM 87499	PRIOR TO
Facility or well name: SAN JUAN 32-9 UNIT 257S	CLOSURE PLAN
	APPROVAL
API Number: 30-045-32525 OCD Permit Number: U/L or Qtr/Qtr F (SENW) Section 8 Township 31N Range 9W County: San Jua	an an
Center of Proposed Design: Latitude 36.91580 •N Longitude -107.80703 •W NAD: 1927 \Bigside 19	
Surface Owner: Sederal State Private Tribal Trust or Indian Allotment	65
2. Pit: Subsection F, G or J of 19.15.17.11 NMAC	
Temporary: Drilling Workover	
Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fl	uid □ ves □ no
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other	
String-Reinforced	
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x l	D
Ellief Beatins. Welded Taecoty Other Oth	
3.	
Below-grade tank: Subsection I of 19.15.17.11 NMAC	
Volume: 120 bbl Type of fluid: Produced Water	
Tank Construction material: Metal	
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other	
Liner type: Thicknessmil	
4. Alternative Method:	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for co	onsideration of approval.
5.	
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence institution or church)	e, school, hospital,

Alternate. Please specify

☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
7.	
Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☐ Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accematerial are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland.	□ Ves □ Ne
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
hin 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, daya lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site hin 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image hin 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock ering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site hin 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site rmanent Pit or Multi-Well Fluid Management Pit hin 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site hin 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image hin 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of all application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site hin 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site hin 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspecti	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.	
	Yes No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
10. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N	MAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC	NMAC 15.17.9 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:	
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	.15.17.9 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:	

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are
### Attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H₂S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	'luid Management Pit
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. I 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	☐ 162 ☐ 140

adopted pursuant to NMSA 1978, Section 3-27-3, as amended.	
- Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	
Society; Topographic map Within a 100-year floodplain.	☐ Yes ☐ No
- FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.13 Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC
17. Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed.	ef.
Name (Print): Title:	
Signature: Date:	
Signature: Date: e-mail address: Telephone:	
e-mail address: Telephone:	
e-mail address: Telephone:	
e-mail address:	016 the closure report.
e-mail address: Telephone:	the closure report.

22.	
Operator Closur	
	the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and
belief. I also cert	that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print):	Crystal Walker Title: Regulatory Coordinator
3 K	21-1-21
Signature:	Date: 12/29/15
e-mail address:	crystal.walker@cop.com Telephone: (505) 326-9837

Page 6 of 6

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: San Juan 32-9 Unit 257S

API No.: 30-045-32525

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.

The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.

2. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

3. BR will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

4. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

5. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached). Form C-141 is attached.

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.0	250

6. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

7. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 8. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing.

9. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner was not found.

10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

11. BR shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Missing)

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District III
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit 1 Copy to appropriate District Office to accordance with 19.15.29 NMAC.

			Rele	ease Notific	catio	n and Co	orrective A	ction				
-						OPERA'	TOR		Initia	al Report	\boxtimes	Final Repor
				il & Gas Compai	ny		ystal Walker					
	01 East 30 th St,			ſ			No.(505) 326-98	837				
Facility Na	ne: San Juan 3	32-9 Unit	257S			Facility Typ	e: Gas Well					
Surface Ow	ner Federal			Mineral O)wner	Federal			API No	.30-45-325	525	
				LOCA	OITA	N OF RE	LEASE					
Unit Letter F		vnship 31N	Range 9W	Feet from the 1415	September 25	/South Line North	Feet from the 1635	East/We	est Line est	County San Juan		
							le <u>-107.80703</u>					
						OF REL						
Type of Rele	ase			11111	OILL	Volume of			Volume F	Recovered		
Source of Re						Date and I	Hour of Occurrence		W. State Assessment State Co. Co.	Hour of Dis	covery	7
Was Immedi	ate Notice Given?	?				If YES, To	Whom?					
			Yes	No 🛛 Not Re	equired							
By Whom?						Date and I	Hour					
Was a Water	course Reached?		121 >	Ĭ-		If YES, Vo	olume Impacting t	the Water	course.			
			es 🛛 1									
1	irse was Impacted	d, Describ	e Fully.*	•								
N/A												
The Build fourtained freeze, incomes	se of Problem an											
No release w	as encountered	during th	e BGT (Closure.								
							-0.74×34×3×1×1×1×1×1×1×1×1×1×1×1×1×1×1×1×1×1					
Describe Are	a Affected and C	leanup Ac	tion Tak	en.*								
IVIA												
I hereby certi	fy that the inform	nation give	en above	is true and compl	lete to t	he hest of my	knowledge and u	ınderstand	that nurs	uant to NM	OCD r	ules and
				d/or file certain re								
public health	or the environme	ent. The a	cceptanc	e of a C-141 repo	rt by th	e NMOCD m	arked as "Final R	eport" doe	es not reli	eve the oper	rator of	f liability
				investigate and re tance of a C-141 r								
	or local laws and			tance of a C-141 i	героп с	ioes not renev	e the operator of i	responsibi	illy for co	omphance v	vitii any	y other
				. /			OIL CONS	SERVA	TION	DIVISIO	N	
Signature:	10	101	11/2	lku			-					
	not.) a	na		Ammarrad bre	Envisormontal Co	maalalist.				
Printed Name	: Crystal Walker	r				Approved by	Environmental Sp	pecialist:				
Title: Regul	atory Coordinate	or				Approval Dat	te:	Ex	piration I	Date:		
E-mail Addre	ss: crystal.walk	ker@cop.c	om		5	Conditions of	f Approval:			A# 1 1		
1	1 -			_			श र ीश री			Attached		
	ional Sheets If	Mecessar		7								
ratiavii Audi	TOTAL DIECTS II.	TACCOSOTI	Y									



July 17, 2012

Ashley Maxwell ConocoPhillips San Juan Business Unit Office 216-2 5525 Hwy 64 Farmington, New Mexico 87401 www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3274

RE: San Juan 32-9 #257S Below Grade Tank Closure Report San Juan County, New Mexico

Dear Ms. Maxwell:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) San Juan 32-9 #257S located in San Juan County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name – San Juan 32-9 #257S
Legal Description - SE¼ NW¼, Section 8, T31N, R9W, San Juan County, New Mexico
Well Latitude/Longitude - N36.91556 and W107.80669, respectively
BGT Latitude/Longitude - N36.91580 and W107.80703, respectively
Land Jurisdiction - Bureau of Land Management (BLM)
Figure 1 – Topographic Site Location Map
Figure 2 – General Site Map, May 2012

1.2 NMOCD Ranking

Prior to site work, the New Mexico Oil Conservation Division (NMOCD) database was reviewed, and no prior ranking information was located. Additionally, the New Mexico Office of the State Engineer (NMOSE) database was reviewed, and no registered water wells are located within 1,000 feet of the location. Once on site, AES personnel furthered assessed the ranking using topographical interpretation, Global Positioning System (GPS) elevation readings, and visual reconnaissance. AES personnel concluded that depth to groundwater at the site was greater than 100 feet below ground surface (bgs), and the location is not within a well-head protection area. Distance to the nearest

surface water, an unnamed wash, was located approximately 700 feet to the south. The site was assessed a NMOCD ranking of 10.

1.3 BGT Closure Assessment

AES was initially contacted by Bruce Yazzie CoP representative, on May 24, 2012, and on the same day, Thomas Long of AES mobilized to the location.

AES personnel collected six soil samples from the below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On May 24, 2012, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples S-1 through S-5 were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs), total petroleum hydrocarbon (TPH), and chlorides. Soil sample SC-1 was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Soil Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil samples were field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Soil Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8260B;
- Chloride per USEPA Method 300.0.

2.3 Soil Field and Laboratory Analytical Results

Field screening for VOCs via OVM showed readings of 0.0 ppm for all soil samples (S-1 through S-5). Field TPH concentrations ranged from 52.3 mg/kg in S-1 up to 76.2 mg/kg in S-3. Field chloride concentrations were between 40 and 60 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results SJ 32-9 #257S BGT Closure, May 2012

Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
Level (NMAC 19.	15.17.13E)		100	250
05/24/12	0.5	0.0	52.3	40
05/24/12	0.5	0.0	70.8	60
05/24/12	0.5	0.0	76.2	40
05/24/12	0.5	0.0	68.2	40
05/24/12	0.5	0.0	54.9	40
	Sampled Level (NMAC 19. 05/24/12 05/24/12 05/24/12 05/24/12	Date Sampled below BGT (ft) Level (NMAC 19.15.17.13E) 0.5 05/24/12 0.5 05/24/12 0.5 05/24/12 0.5 05/24/12 0.5 05/24/12 0.5	Date Sampled below BGT (ft) Reading (ppm) Level (NMAC 19.15.17.13E) 05/24/12 0.5 0.0 05/24/12 0.5 0.0 05/24/12 0.5 0.0 05/24/12 0.5 0.0 05/24/12 0.5 0.0	Date Sampled below BGT (ft) Reading (ppm) TPH (mg/kg) Level (NMAC 19.15.17.13E) 100 05/24/12 0.5 0.0 52.3 05/24/12 0.5 0.0 70.8 05/24/12 0.5 0.0 76.2 05/24/12 0.5 0.0 68.2

Laboratory analytical results showed that the benzene and total BTEX concentrations in SC-1 were less than 0.050 mg/kg and less than 0.25 mg/kg, respectively. The laboratory chloride concentration was below the laboratory detection limit of 30 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results, SJ 32-9 #257S BGT Closure, May 201	Table 2. Soil Labora	tory Analytical Results	, SJ 32-9 #257S BGT	Closure, May 2013
---	----------------------	-------------------------	---------------------	-------------------

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.15	.17.13E)	0.2	50	1	00	250
SC-1	05/24/12	0.5	<0.050	<0.25	NA	NA	<30

NA = not analyzed.

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Benzene concentrations in SC-1 were below the laboratory detection limit of 0.050 mg/kg, and total BTEX concentrations were below the NMOCD action level of 50 mg/kg. Field TPH concentrations were below the NMOCD action level of 100 mg/kg in samples S-1 through S-5. Chloride concentrations for all samples were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, BTEX, TPH, and chlorides, no further work is recommended.

If you have any questions about this report or site conditions, please do not hesitate to contact me or Elizabeth McNally at (505) 564-2281.

Sincerely,

Heather Woods Staff Geologist

Heather M. Woods

Elizabeth McNally, P.E.


Elizabeth V McNelly


Ashley Maxwell SJ 32-9 #257S BGT Closure Report July 17, 2012 Page 5 of 5

Attachments:

Figure 1. Topographic Site Location Map Figure 2. General Site Map, May 2012 AES Field Screening Report 052412 Hall Analytical Report 1205A98

S:\Animas 2000\2012 Projects\Conoco Phillips\SJ 32-9 257S\SJ 32-9 257S BGT Assessment Report 071712.docx

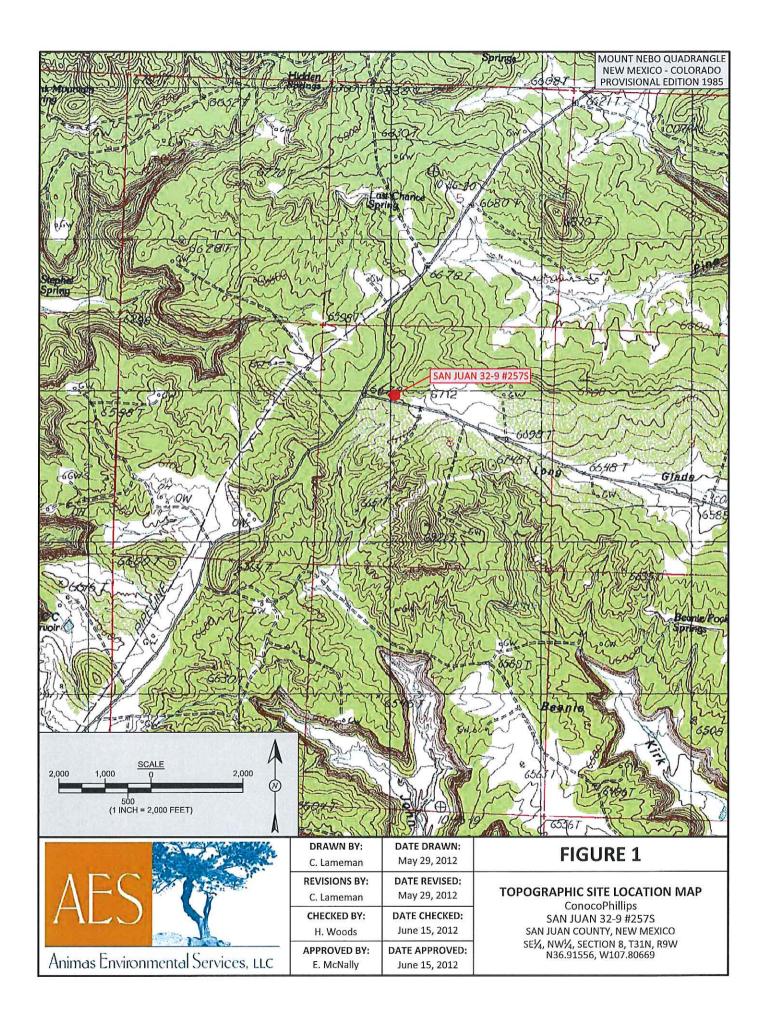

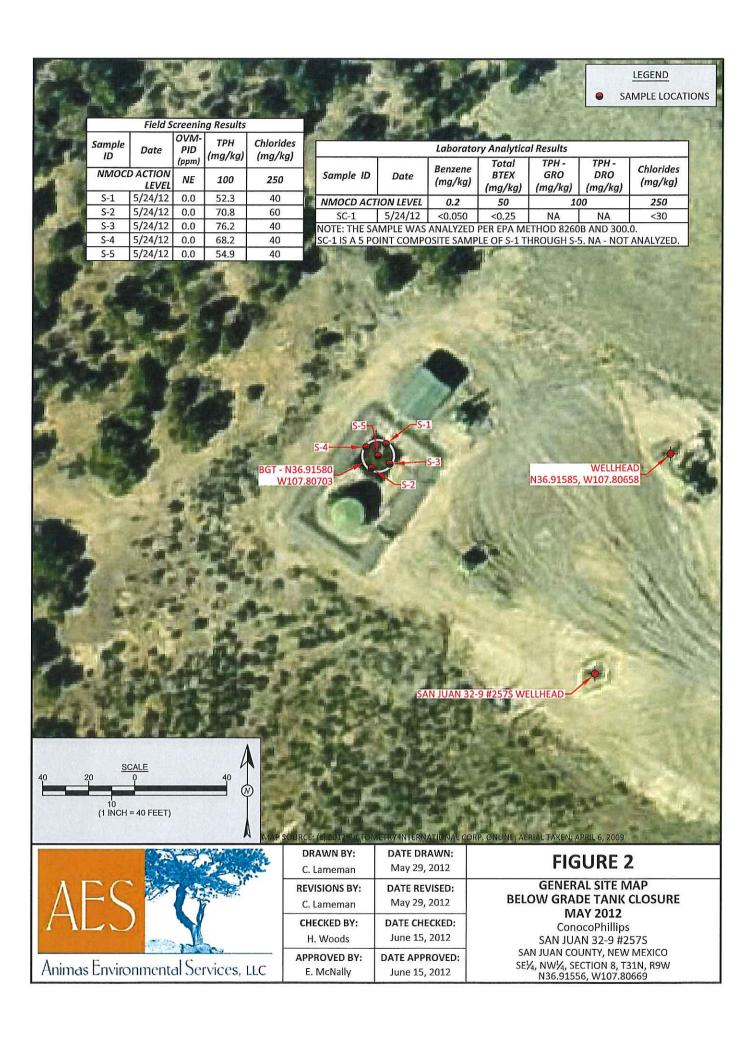

AES Field Screening Report

Animas Environmental Services, LLC

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

Durango, Colorado 970-403-3274

Project Location: SJ 32-9 #257S Date: 5/24/2012

Matrix: Soil

Client: ConocoPhillips

		Time of			Field	Field TPH				
	Collection	Sample	Sample	OVM	Chloride	Analysis	Field TPH*	TPH PQL		TPH Analysts
Sample ID	Date	Collection	Location	(bpm)	(mg/kg)	Time	(mg/kg)	(mg/kg)	DF	Initials
S-1	5/24/2012	11:55	North	0.0	40	15:48	52.3	20.0	Н	TIL
S-2	5/24/2012	11:57	South	0.0	09	15:50	70.8	20.0	H	TIL
S-3	5/24/2012	11:59	East	0.0	40	15:52	76.2	20.0	H	ŢĽ
S-4	5/24/2012	12:01	West	0.0	40	15:55	68.2	20.0	Ţ	77
S-5	5/24/2012	12:03	Center	0.0	40	15:57	54.9	20.0	Н	TLL

Practical Quantitation Limit PQL

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with Silver

Not Detected at the Reporting Limit

S

*Field TPH concentrations recorded may be below PQL. Dilution Factor

Analyst:

Total Petroleum Hydrocarbons - USEPA 418.1

Nitrate



Hall Environmental Analysis Laboratory
4901 Hawkins NE
Albuquerque, NM 87109
TEL: 505-345-3975 FAX: 505-345-4107
Website: www.hallenvironmental.com

May 30, 2012

Ross Kennemer Animas Environmental Services 624 East Comanche

Farmington, NM 87401 TEL: (505) 486-1776 FAX (505) 324-2022

RE: COP SJ 32-9 #257S OrderNo.: 1205A98

Dear Ross Kennemer:

Hall Environmental Analysis Laboratory received 1 sample(s) on 5/26/2012 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman

Laboratory Manager

Only

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report

Lab Order 1205A98

Date Reported: 5/30/2012

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental Services

Project: COP SJ 32-9 #257S

Lab ID: 1205A98-001

Client Sample ID: SC-1

Collection Date: 5/24/2012 12:10:00 PM

Received Date: 5/26/2012

Analyses	Result	RL Qu	al Units	DF	Date Analyzed
EPA METHOD 300.0: ANIONS					Analyst: BRM
Chloride	ND	30	mg/Kg	20	5/29/2012 10:29:54 AM
EPA METHOD 8260B: VOLATILES S	HORT LIST				Analyst: BDH
Benzene	ND	0.050	mg/Kg	1	5/29/2012 10:35:58 AM
Toluene	ND	0.050	mg/Kg	1	5/29/2012 10:35:58 AM
Ethylbenzene	ND	0.050	mg/Kg	1	5/29/2012 10:35:58 AM
Xylenes, Total	ND	0.10	mg/Kg	1	5/29/2012 10:35:58 AM
Surr: 1,2-Dichloroethane-d4	86.8	70-130	%REC	1	5/29/2012 10:35:58 AM
Surr: 4-Bromofluorobenzene	92.5	70-130	%REC	1	5/29/2012 10:35:58 AM
Surr: Dibromofluoromethane	90.2	71.7-132	%REC	1	5/29/2012 10:35:58 AM
Surr: Toluene-d8	92.4	70-130	%REC	1	5/29/2012 10:35:58 AM

Matrix: SOIL

Qualifiers:

- */X Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- RL Reporting Detection Limit

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1205A98

30-May-12

Client:

Animas Environmental Services

Project:

COP SJ 32-9 #257S

Sample ID MB-2130

SampType: MBLK

Batch ID: 2130

TestCode: EPA Method 300.0: Anions

Client ID: PBS

RunNo: 3074

Prep Date: Analyte

5/29/2012

Analysis Date: 5/29/2012 PQL

SegNo: 84997

Units: mg/Kg

HighLimit

RPDLimit Qual

Chloride

ND 1.5

Sample ID LCS-2130

SampType: LCS

RunNo: 3074

TestCode: EPA Method 300.0: Anions

LCSS Client ID:

Batch ID: 2130

Prep Date: 5/29/2012 Analysis Date: 5/29/2012

PQL

1.5

30

SeqNo: 84998

Units: mg/Kg

Analyte

Client ID:

Prep Date:

SPK value SPK Ref Val

%REC

LowLimit

%RPD HighLimit

%RPD

Chloride

Result

15.00

97.5

90

RPDLimit

15

SPK value SPK Ref Val %REC LowLimit

110

Qual

Sample ID 1205A98-001AMS

SC-1

5/29/2012

SampType: MS

Batch ID: 2130

TestCode: EPA Method 300.0: Anions

RunNo: 3074 SeqNo: 85000

Units: mg/Kg

Analyte

Result PQL

Analysis Date: 5/29/2012

15.00

SPK value SPK Ref Val 20.09

%REC LowLimit 79.6 74.6 HighLimit %RPD 118

RPDLimit

Qual

Chloride

Client ID:

Prep Date:

Sample ID 1205A98-001AMSD

SampType: MSD

TestCode: EPA Method 300.0: Anions

20.09

RunNo: 3074

Units: mg/Kg

Qual

Analyte Chloride

5/29/2012

SC-1

Batch ID: 2130

PQL

30

Result

31

Analysis Date: 5/29/2012

SPK value

15.00

SPK Ref Val

SeqNo: 85001

70.3

%REC I owl imit

HighLimit

74.6

%RPD 118 4.43

RPDLimit 20

S

Qualifiers:

*/X Value exceeds Maximum Contaminant Level.

E Value above quantitation range

J Analyte detected below quantitation limits Analyte detected in the associated Method Blank

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit Page 2 of 3

R RPD outside accepted recovery limits Reporting Detection Limit

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1205A98

30-May-12

Client:

Animas Environmental Services

0.47

0.45

0.43

0.5000

0.5000

0.5000

Project:

COP SJ 32-9 #257S

Sample ID 5mL rb	Samp	Туре: МЕ	BLK	TestCode: EPA Method 8260B: Volatiles Short List											
Client ID: PBS	Bato	h ID: R3	072	F											
Prep Date:	Analysis I	Date: 5/	29/2012	5	SeqNo: 8	4877	Units: mg/Kg								
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual					
Benzene	ND	0.050													
Toluene	ND	0.050													
Ethylbenzene	ND	0.050													
Xylenes, Total	ND	0.10								ža.					
Surr: 1,2-Dichloroethane-d4	0.46	0.46 0.5000			92.9	70	130								
Surr: 4-Bromofluorobenzene	0.48		0.5000		96.7	70	130								
Surr: Dibromofluoromethane	0.46		0.5000		92.7	71.7	132								
Surr: Toluene-d8	0.45		0.5000		90.9	70	130								
Sample ID 100ng Ics	Samp	Гуре: LC	s	Tes	tCode: El	PA Method	8260B: Vola	tiles Short	List						
Client ID: LCSS	Batc	h ID: R3	072	F	RunNo: 3	072									
Prep Date:	Analysis [Date: 5/	29/2012	S	SeqNo: 8	4878	Units: mg/K	(g							
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit							%RPD	RPDLimit	Qual					
Benzene	1.0	0.050	1.000	0	103	70.7	123								
Toluene	0.99	0.050	1.000	0	99.3	80	120								
Surr: 1,2-Dichloroethane-d4	0.43		0.5000		85.3	70	130								

Qualifiers:

*/X Value exceeds Maximum Contaminant Level.

E Value above quantitation range

Surr: 4-Bromofluorobenzene Surr: Dibromofluoromethane

Surr: Toluene-d8

J Analyte detected below quantitation limits

R RPD outside accepted recovery limits

B Analyte detected in the associated Method Blank

70

70

71.7

94.4

90.3

85.9

130

132

130

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

RL Reporting Detection Limit

Page 3 of 3



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87105 TEL: 505-345-3975 FAX: 505-345-410; Website: www.hallenvironmental.com

Sample Log-In Check List

Client Name: Animas Environmental	Work Order Number: 1205A98											
Received by/date: AF 05/26/12												
Logged By: Andy Freeman 5/26/2012	adol											
Completed By: Anne Thorne 5/29/2012	and I'm											
Reviewed By: AT US/29/12	control of the state of the sta											
Chain of Custody												
1. Were seals intact?	Yes ☐ No ☐ Not Present ☑											
2. Is Chain of Custody complete?	Yes ☑ No ☐ Not Present ☐											
3. How was the sample delivered?	Courier											
<u>Log In</u>												
4. Coolers are present? (see 19. for cooler specific information)	Yes ☑ No ☐ NA ☐											
5. Was an attempt made to cool the samples?	Yes ☑ No ☐ NA ☐											
6. Were all samples received at a temperature of >0° C to 6.0°C	Yes ☑ No ☐ NA ☐											
7. Sample(s) in proper container(s)?	Yes ☑ No □											
8. Sufficient sample volume for indicated test(s)?	Yes ☑ No □											
Are samples (except VOA and ONG) properly preserved?	Yes ☑ No □											
10. Was preservative added to bottles?	Yes □ No ☑ NA □											
11. VOA vials have zero headspace?	Yes ☐ No ☐ No VOA Vials 🗹											
12. Were any sample containers received broken?	Yes No 🗹											
13. Does paperwork match bottle labels?	Yes ☑ No ☐ # of preserved bottles checked											
(Note discrepancies on chain of custody)	for pH:											
14. Are matrices correctly identified on Chain of Custody?	Yes ☑ No ☐ (<2 or >12 unless noted)											
15. Is it clear what analyses were requested?	Yes ☑ No ☐ Adjusted?											
16. Were all holding times able to be met? (If no, notify customer for authorization.)	Yes ☑ No ☐ Checked by:											
Special Handling (if applicable)	Chocked by.											
17. Was client notified of all discrepancies with this order?	Yes □ No □ NA ☑											
Person Notified: Date												
By Whom: Via:	□ eMail □ Phone □ Fax □ In Person											
Regarding:												
Client Instructions:	a and a single control of the contro											
18. Additional remarks:												
19. Cooler Information Cooler No Temp °C Condition Seal Intact Seal No 1 1.0 Good Yes	Seal Date Signed By											

	ANALYSIS LABORATORY	www.hallenvironmental.com	4901 Hawkins NE - Albuquerque, NM 87109	Tel. 505-345-3975 Fax 505-345-4107	Anal	(†()	Gas on Sas/Dies	+ TPH (GN) (A) (A) (A) (A) (A) (A) (A)	AO) AO) AO) AO() AO() AO() AO() AO() AO(BTEX + METHOCOME HTTC + METHOCOME HTTC + METHOCOME HETHOCOME HOUS (F, C 8081 Pestical S260B (VOA8200B (VOA8200B)	*						3	act cod: (200 supervision: Hampee	1237 UNLATIVE WALLS SMILE SMILE
Turn-Around Time:	□ Standard X Rush 52meday	Project Name:	COP 55 32-9 #2575	Project #:		Project Manager:	R. Kennemer	Sampler: T Long	Sample Temperature	Container Preservative Type and # Type	1-402 - 1205498-1	4					Date S	Received by: Date Time	$ \mathcal{A} _{\mathcal{A}}$ $ \mathcal{A} _{\mathcal{A}}$ $ \mathcal{A} _{\mathcal{A}}$ $ \mathcal{A} _{\mathcal{A}}$ intracted to offer acefedited laboratories. This serves as notice of this
-Custody Record	Client Animas Envisonmental	1	624 E Comanche	87401	!		QA/QC Package: X Standard □ Level 4 (Full Validation)	□ Other	□ EDD (Type)	Date Time Matrix Sample Request ID	1-75 130 Sois 56-1							Date: Time: Relinquished by:	/25//フー/237 / ピかんな ガルートルトルトルル

