

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-031-20100
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Santa Fe Railroad A
8. Well Number 77
9. OGRID Number
10. Pool name or Wildcat Upper Hospah
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 6966' GR

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator Dominion Production Company, LLC

3. Address of Operator 1414 W Swann Av, Suite 100, Tampa, FL 33606

4. Well Location
 Unit Letter P : 330 feet from the S line and 760 feet from the E line
 Section 1 Township 17N Range 9W NMPM County McKinley

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Dominion Proposes to plug this well in accordance with the attached procedure and any agreed modifications thereto.


ESTIMATED START DATE 5/15/19

NMOCD
APR 29 2019
DISTRICT III


COA: Extend plug #1: 1609' - 1490'

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE  TITLE President DATE 4/26/19


Type or print name David Burns E-mail address: burns david@verizon.net PHONE: 832 545 4600

For State Use Only
 APPROVED BY:  TITLE District Supervisor DATE 5/13/19
 Conditions of Approval (if any): AV

Plug and Abandonment Plan
Dominion Production Co, LLC.
Santa Fe Railroad "A" 77
API# 3003120100
330' FSL & 760' FEL
Sec. 1 T17N R9W
McKinley County, New Mexico

1. Comply with all OCD, DPC and contractor safety rules and regulations. Hold safety meetings each morning.
2. MIRU, Check Braden head for pressure. Bleed pressure off of well if necessary.
3. **Plug # 1- (Upper Hospah Sand Perfs 1525'- 1541' Lower Hospah Sand O/H 1542'-1609' GR)** RIH with 2 7/8" 4.7#, WS with mule shoe sub. Wash wellbore to depth of approximately 1609'. Mix and Pump 30 Sks, Class B Cement @ 15.5 ppg to cover Gallup with 50' cap and 50' excess.
4. **Plug #2-(Mancos Plug/ Surface Plug, 750'-Surface)** MIRU Wireline Truck, RIH with CBL Tool, from approx 1394' to Surface. Shoot 3-3/8" Squeeze holes (120 Degree Phasing) at approx. 750', actual to be determined from Bond Log. MIRU Pump Truck, Pump Approx. 20 bbls Fresh Water to establish circulation through Squeeze Holes. At Successful Circulation, Mix and Bullhead 130 Sks, Class B Cement @ 15.5 ppg, for outside annulus, Mancos Surface Plug, followed with 102 Sks of Class B Cement @ 15.5 ppg from 750' to Surface. Allow well to stabilize overnight. Top Casing off with Cement if necessary.
5. Cut off well 3' below ground and install P&A marker per OCD specifications. RD, cleanup MOL.
6. Restore location to OCD specifications.

Plug and Abandonment Plan
Dominion Production Co, LLC.
Santa Fe Railroad A 77
API# 3003120100 330' FSL & 760' FEL
Sec. 1 T17N R9W McKinley County, New Mexico

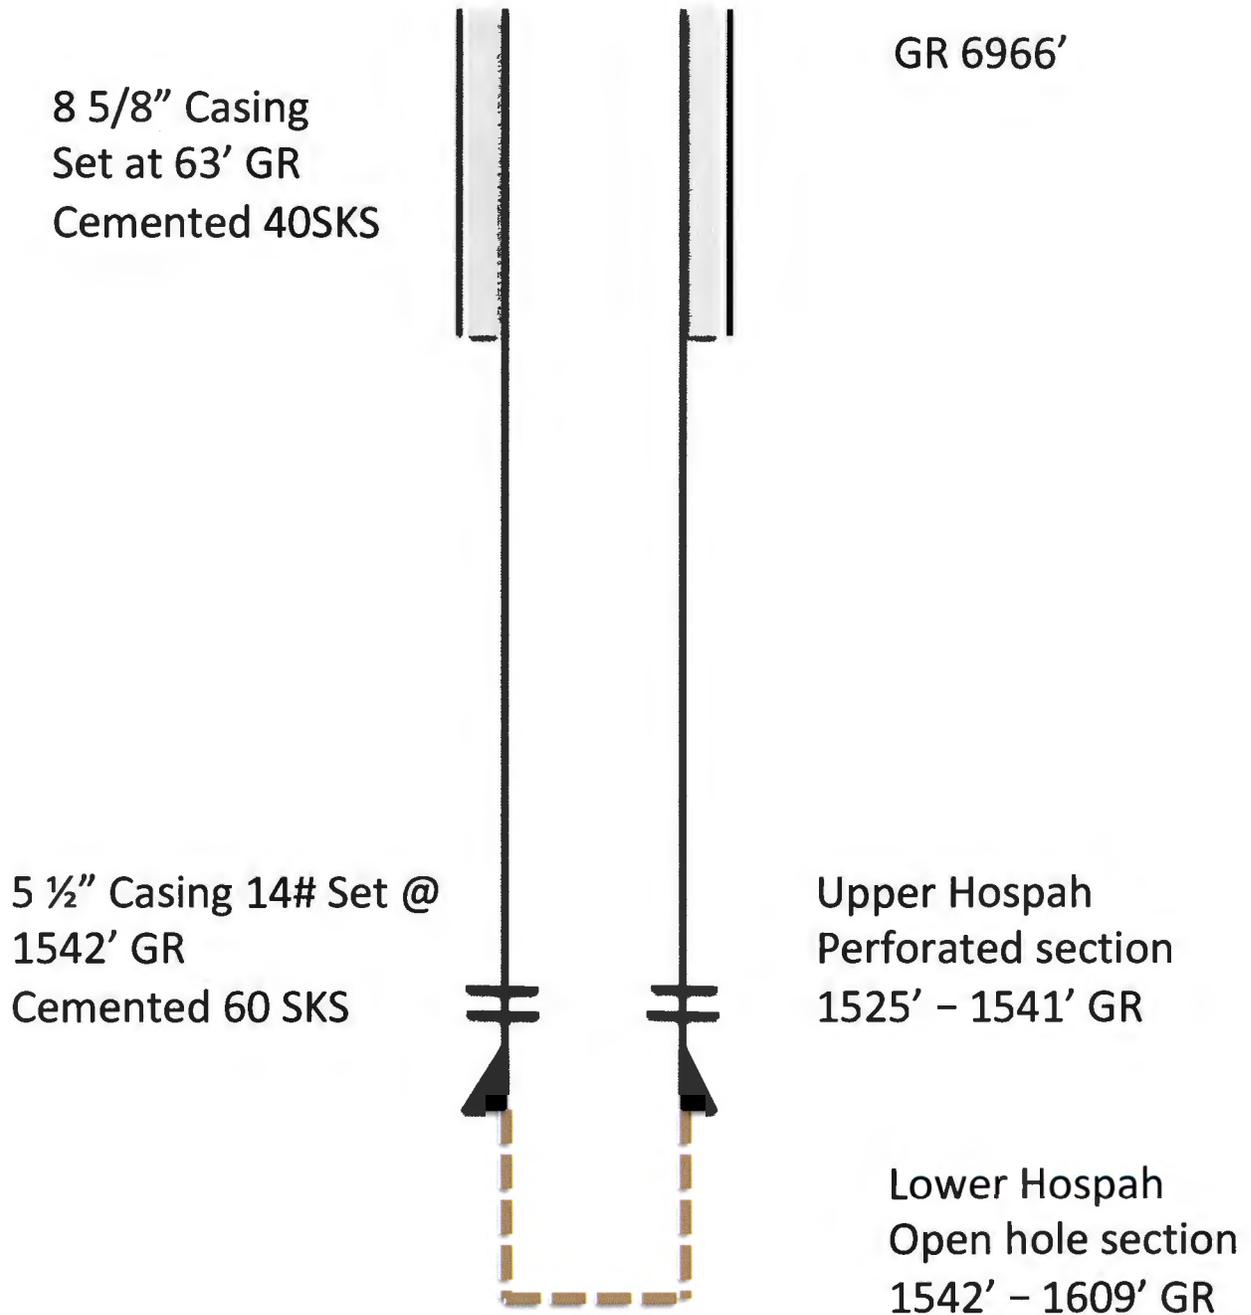

Current wellbore


Plug and Abandonment Plan

Dominion Production Co, LLC.

Santa Fe Railroad A 77

API# 3003120100 330' FSL & 760' FEL

Sec. 1 T17N R9W McKinley County, New Mexico

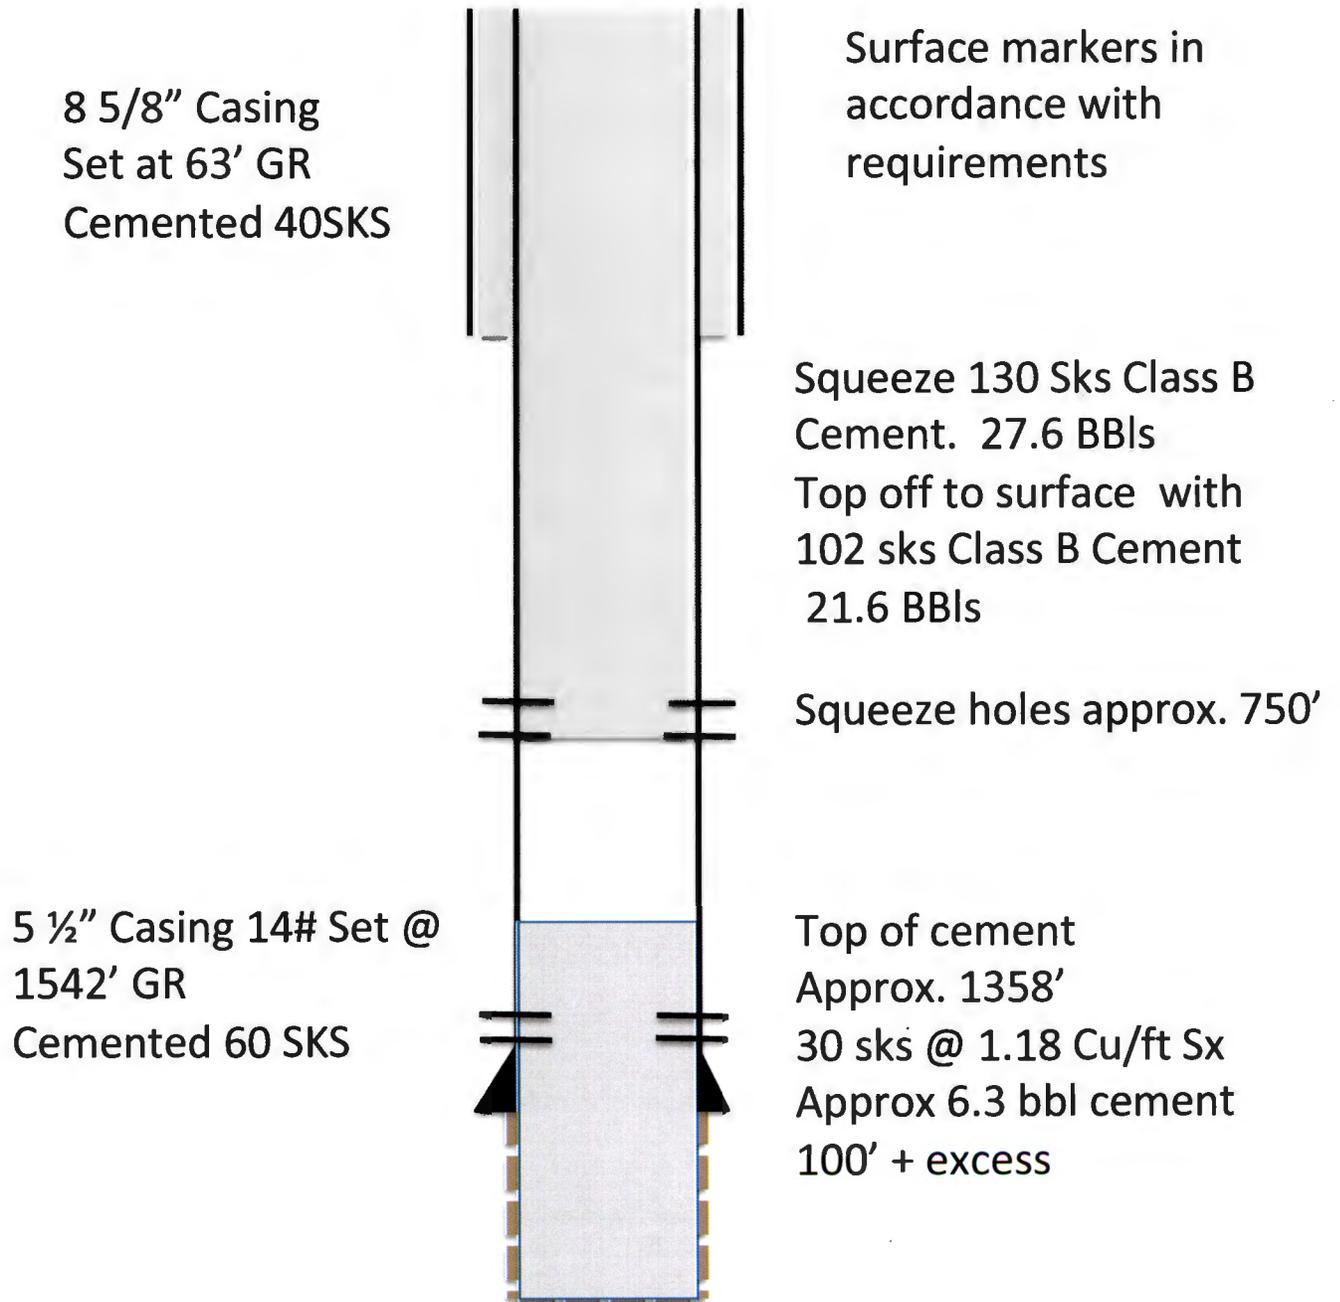

proposed wellbore