

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0137  
Expires: January 31, 2018

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
NMNM87236

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE - Other instructions on page 2**

7. If Unit or CA/Agreement, Name and/or No.  
NMNM89347

1. Type of Well  
 Oil Well  Gas Well  Other: COAL BED METHANE

8. Well Name and No.  
WEST BISTI COAL 14 COM 1

2. Name of Operator  
DJR OPERATING LLC

Contact: SHAW-MARIE FORD  
E-Mail: sford@djrlc.com

9. API Well No.  
30-045-28914-00-S1

3a. Address  
1600 BROADWAY SUITE 1960  
DENVER, CO 80202

3b. Phone No. (include area code)  
Ph: 505-632-3476

10. Field and Pool or Exploratory Area  
BASIN FRUITLAND COAL

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 14 T25N R13W NENE 0790FNL 0790FEL  
36.406235 N Lat, 108.181503 W Lon

11. County or Parish, State  
SAN JUAN COUNTY, NM

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

DJR Operating, LLC requests permission to Plug & Abandon the subject well per the attached Procedure, Current & Proposed Wellbore Diagram and Reclamation Plan.

Notify NMOCD 24hrs  
Prior to beginning  
operations

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #518544 verified by the BLM Well Information System  
For DJR OPERATING LLC, sent to the Farmington  
Committed to AFMSS for processing by JOE KILLINS on 06/17/2020 (20JK0613SE)**

Name (Printed/Typed) SHAW-MARIE FORD

Title REGULATORY SPECIALIST

Signature (Electronic Submission)

Date 06/11/2020

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By JOE KILLINS

Title ENGINEER

Date 08/14/2020

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Farmington

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\***

AV

**Plug and Abandonment Procedure**  
**for**  
**DJR Operating, LLC**  
**West Bisti Coal 14 Com 1**  
**API # 30-045-28914**  
**NE/NE, Unit A, Sec. 14, T25N, R13W**  
**San Juan County, NM**

**I.**

1. Hold pre-job meeting, comply with all NMOCD, BLM and environmental regulations.
2. Check and record tubing, casing and bradenhead pressures.
3. Remove existing piping from casing valve, RU blow lines from casing valves and blow down casing pressure. Kill well as necessary. Ensure that well is dead or on a vacuum.
4. Trip out of hole with rods and pump. Lay down to be sent in for storage/salvage.
5. ND WH, NU BOP, function test BOP.
6. Trip out of hole with 2 3/8" tubing. LD tubing to be sent in for storage/salvage.

**II.**

7. PU workstring, TIH with bit and scraper, make sure that the bit and scraper will go below 1260'. TOOH.
8. PU and RIH with a 4 1/2" cement retainer. Set the CR at +/- 1260'. Pressure test tubing to 1000 psi, sting out of CR, test casing to 600 psi. If casing does not test, contact engineering.

**Provided that casing test was good, proceed to step 9.**

9. RU cement equipment. Pump water to assure that tubing is clear.
10. Plug 1. Mix and attempt to pump 10 sx class G cement through cement retainer and displace with 5.1 bbl water. If zone pressures up, sting back out of retainer and continue with Plug 2.

11. Plug 2. Fruitland, Kirtland, Ojo Alamo, and surface casing shoe. From 1260' to surface, mix and pump cement until cement circulation is achieved at surface.
12. RD cementing equipment. Cut off wellhead, fill annuli with cement as necessary. Install P&A marker as per regulatory requirements. Record GPS coordinates for P&A marker and the final P&A report. Photograph the P&A marker and attach to the report.
13. RD and MO all rig and cement equipment. Assure that location is free of trash and contamination before moving off.
14. Send all reports and attachments to DJR Aztec office for regulatory filings.

**DJR Operating, LLC  
Current Wellbore Diagram**

**West Bisti Coal 14 Com 1**

API # 30-045-28914  
NE/NE, Unit A, Sec 14, T25N, R13W  
San Juan County, NM

GL 6418'  
KB N/A  
Spud Date 12/30/1992

**SURF CSG**

Hole size 8.75"  
Csg Size: 7"  
Wt: 20#  
Grade: J-55  
ID: 6.456"  
Depth 126'  
casing cap ft<sup>3</sup>/ft: 0.2273  
TOC: Circ cmt  
to surface

**FORMATION TOPS**


Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland Coal	1097'
Pictured Cliffs	1348'

**PROD CSG**

Hole size 6.25"  
Csg Size: 4.5"  
Wt: 9.5#  
Grade: J-55  
ID: 4.09"  
Depth 1545'  
casing cap ft<sup>3</sup>/ft: 0.0912  
7x4.5 capacity ft<sup>3</sup>/ft 0.1169  
TOC: Circ cmt  
to surface

Fruitland Coal perms  
1294-1316'

PBTD 1503'  
TD 1550'

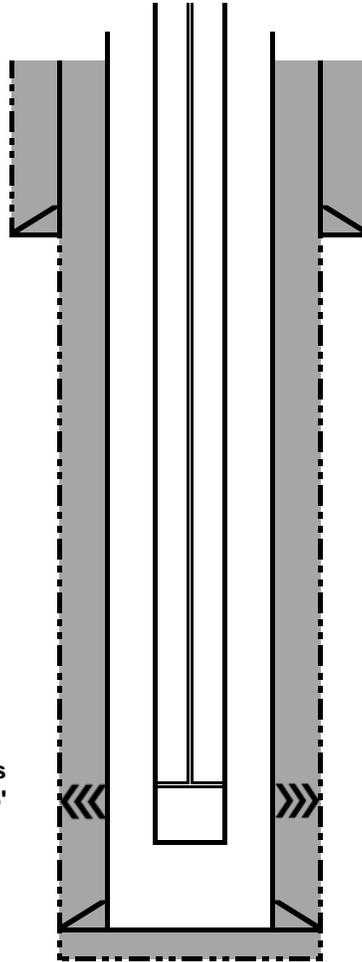

**Production Tubing/Rod Detail**

1 jt. 2.375", SN, 44 jts. 2.375" tbg. EOT 1414'.

2"x1.5"x12' RWAC pump, 55x.75" rods.

**DJR Operating, LLC  
Proposed Wellbore Diagram**

**West Bisti Coal 14 Com 1**

API # 30-045-28914  
NE/NE, Unit A, Sec 14, T25N, R13W  
San Juan County, NM

GL 6418'  
KB N/A  
Spud Date 12/30/1992

**SURF CSG**

Hole size 8.75"  
Csg Size: 7"  
Wt: 20#  
Grade: J-55  
ID: 6.456"  
Depth 126'  
casing cap ft<sup>3</sup>/ft: 0.2273  
TOC: Circ cmt  
to surface

**FORMATION TOPS**

Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland Coal	1097'
Pictured Cliffs	1348'

**Plug 2:** 1260' to surface, to cover Fruitland, Kirtland, Ojo Alamo, surface shoe.


**PROD CSG**

Hole size 6.25"  
Csg Size: 4.5"  
Wt: 9.5#  
Grade: J-55  
ID: 4.09"  
Depth 1545'  
casing cap ft<sup>3</sup>/ft: 0.0912  
7x4.5 capacity ft<sup>3</sup>/ft 0.1169  
TOC: Circ cmt  
to surface

Cement Ret. 1260'  
Fruitland Coal perms  
1294-1316'

**Plug 1:** Attempt to pump 10 sx class G cement through CR to Fruitland perms.

PBTD 1503'  
TD 1550'

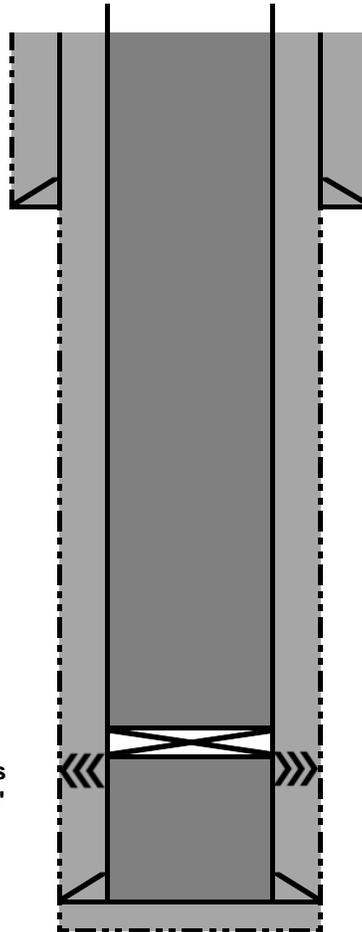

**BLM FLUID MINERALS  
Geologic Report**

**Date Completed: 8/6/2020**

Well No.	West Bisti Coal 14 Com # 1	Location	790'	FNL	&	790'	FEL
Lease No.	NMNM87236	Sec. 14	T25N			R13W	
Operator	DJR Operating LLC	County	San Juan		State	New Mexico	
Total Depth	1550'	PBTD 1503'	Formation Basin Fruitland Coal				
Elevation (GL) 6418'			Elevation (KB) 6430' (est.)				

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm					
Nacimiento Fm		Behind Surface casing	Surface		Surface/Fresh water sands
Ojo Alamo Ss	Behind Surface casing			202'	Aquifer (fresh water)
Kirtland Shale			202'	1100'	
Fruitland Fm			1100'	1348'	Coal/Gas/Possible water
Pictured Cliffs Ss			1348'		Gas
Lewis Shale					
Chacra					Probable water or dry
Cliff House Ss (main)					Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos Shale					Source rock
Gallup					O&G/Water
Dakota					O&G/Water

Remarks:

P & A

- Please ensure that the top of the Fruitland formation as well as the entire Ojo Alamo aquifer, identified in this report, are isolated by proper placement of cement plugs. This will protect the freshwater sands in this well bore.

Formation Tops Reference Well:

1) DJR Operating LLC Same

2) British-American Production Co.  
Shipp # 2  
760' FNL, 660' FEL  
Sec 11-25N-13W  
GL= 6280'

Prepared by: Walter Gage

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
FARMINGTON DISTRICT OFFICE  
6251 COLLEGE BLVD.  
FARMINGTON, NEW MEXICO 87402

**Attachment to notice of Intention to Abandon**

Well: WEST BISTI COAL 14 COM 1

API: 300452891400S1

**CONDITIONS OF APPROVAL**

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 564-7750.
3. If casing fails to test contact BLM Engineering. No changes are to be made to this approved Sundry without prior approval from the BLM.
4. A Subsequent Report Sundry Notice (Form 3160-5) must be submitted within 30 days after plugging operations are complete.

**GENERAL REQUIREMENTS FOR  
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES  
FARMINGTON FIELD OFFICE**

1.0 The approved plugging plans may contain variances from the following minimum general requirements.

1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.

1.2 Requirements may be added to address specific well conditions.

2.0 Materials used must be accurately measured. (densometer/scales)

3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.

3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.

4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.

4.1 The cement shall be as specified in the approved plugging plan.

4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.3 Surface plugs may be no less than 50' in length.

4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.

**4.6 A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.**

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H<sub>2</sub>S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.