District I 1625 N French Dr., Hobbs, NM 88240 1301 W Grand Ave , Artesia, NM 88210 District III 1000 Rio Brazos Rd, Aztec, NM 87410

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method X Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538 Address: P.O. Box 4289, Farmington, NM 87499 Facility or well name: SAN JUAN 29-7 UNIT 60N API Number: 30-039-30448 OCD Permit Number: J(NW/SE) U/L or Qtr/Qtr: 29N Section: Township: Range: County: Rio Arriba Center of Proposed Design: Latitude: 36.679847 ٥N °W NAD: ☐ 1927 🗓 1983 Longitude: 107.554462 Surface Owner: X Federal Private Tribal Trust or Indian Allotment X Pit: Subsection F or G of 19.15.17 11 NMAC X Drilling Workover Permanent Emergency Cavitation P&A Thickness 12 mil X LLDPE HDPE PVC Other X Lined Unlined Liner type. X String-Reinforced Liner Seams X Welded X Factory | Other 4400 bbl Dimensions L 65' Volume: Closed-loop System: Subsection H of 19.15 17 11 NMAC Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or Type of Operation P&A notice of intent) Above Ground Steel Tanks Haul-off Bins Other Lined [Unlined mil LLDPE HDPE Thickness Liner type: Liner Seams: Welded Factory Other Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: bbl Type of fluid: Tank Construction material:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Alternative Method:

Visible sidewalls and liner

Liner Type:

Secondary containment with leak detection

Thickness

Oil Conservation Division

Other

lpvc

Visible sidewalls only

THDPE

mil

Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off

Other

Page 1 of 5

| Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) | | | |
|--|-----------------|----------|--|
| Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) | | | |
| Four foot height, four strands of barbed wire evenly spaced between one and four feet | ' | <i></i> | |
| Alternate. Please specify | | | |
| 7 | | | |
| Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) | | | |
| Screen Netting Other | | | |
| Monthly inspections (If netting or screening is not physically feasible) | | | |
| 8 | | | |
| Signs: Subsection C of 19.15.17 11 NMAC | | | |
| 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers | | | |
| X Signed in compliance with 19.15 3.103 NMAC | | | |
| | | | |
| Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17 NMAC for guidance. | | | |
| Please check a box if one or more of the following is requested, if not leave blank: | | | |
| Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration (Fencing/BGT Liner) | eration of appr | oval. | |
| Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. | | | |
| | | | |
| Siting Criteria (regarding permitting) 19.15.17.10 NMAC | | | |
| Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable | | | |
| source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for | | | |
| consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria | | Ì | |
| does not apply to drying pads or above grade-tanks associated with a closed-loop system. | | | |
| Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | Yes | □No | |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake | Yes | □No | |
| (measured from the ordinary high-water mark). | | | |
| - Topographic map; Visual inspection (certification) of the proposed site | | _ | |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. | Yes | No | |
| (Applies to temporary, emergency, or cavitation pits and below-grade tanks) | Пиа | | |
| - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | | | |
| Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. | Yes | No | |
| (Applied to permanent pits) | □NA | | |
| - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | l | | |
| Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. | Yes | No | |
| - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site. | | | |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended | Yes | No | |
| - Written confirmation or verification from the municipality; Written approval obtained from the municipality | | | |
| Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | | ∐No | |
| Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division | Yes | No | |
| Within an unstable area. | Yes | No | |
| - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map | | <u>.</u> | |
| Within a 100-year floodplain - FEMA map | Yes | No | |

Form C-144 Oil Conservation Division Page 2 of 5

| Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist Subsection B of 19.15.17.9 NMAC |
|---|
| Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached |
| Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC |
| Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 |
| Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC |
| Design Plan - based upon the appropriate requirements of 19.15.17 11 NMAC |
| Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC |
| Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17 13 NMAC |
| |
| Previously Approved Design (attach copy of design) API or Permit |
| Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15 17.9 |
| Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17 10 NMAC |
| Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC |
| Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC |
| Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC |
| Previously Approved Design (attach copy of design) API |
| Previously Approved Operating and Maintenance Plan API |
| |
| Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC |
| Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. |
| Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17 9 NMAC |
| Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17 10 NMAC |
| Climatological Factors Assessment |
| Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC |
| Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC |
| Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC |
| Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC |
| Quality Control/Quality Assurance Construction and Installation Plan |
| Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC |
| Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15.17.11 NMAC |
| Nuisance or Hazardous Odors, including H2S, Prevention Plan |
| Emergency Response Plan |
| Oil Field Waste Stream Characterization Monitoring and Inspection Plan |
| Erosion Control Plan |
| Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17 13 NMAC |
| 1 |
| 14 Proposed Closure: 19.15.17.13 NMAC |
| Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. |
| Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative |
| Proposed Closure Method: Waste Excavation and Removal |
| Waste Removal (Closed-loop systems only) |
| On-site Closure Method (only for temporary pits and closed-loop systems) |
| In-place Burial On-site Trench |
| Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration) |
| Waste Excavation and Removal Closure Plan Checklist (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. |
| Please indicate, by a check mark in the box, that the documents are attached. |
| Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC |
| Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17 13 NMAC |
| Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) |
| Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15.17 13 NMAC |
| Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17.13 NMAC |
| Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17 13 NMAC |

Form C-144 Oil Conservation Division Page 3 of 5

| 16 | | | |
|--|--|-----------------|--|
| Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or H Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluids and drift facilities are required. | aul-off Bins Only:(19.15 17 13.D NMAC) Transfer Use attachment if more than two | | |
| Disposal Facility Name: Disposal Fac | ility Permit #: | | |
| | ility Permit #: | | |
| Will any of the proposed closed-loop system operations and associated activities occur on Yes (If yes, please provide the information No | | | |
| Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specification - based upon the appropriate requiren Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 1 Site Reclamation Plan - based upon the appropriate requirements of Subsection G of | 5 17 13 NMAC | | |
| Siting Criteria (Regarding on-site closure methods only: 19 15 17 10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Recommendations certain siting criteria may require administrative approval from the appropriate district office or may be consider office for consideration of approval Justifications and/or demonstrations of equivalency are required Please regions. | red an exception which must be submitted to the Santa Fe Environi | | |
| Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search, USGS Data obtained from nea | . Yes rby wells N/A | No | |
| Ground water is between 50 and 100 feet below the bottom of the buried waste | □Yes | □No | |
| - NM Office of the State Engineer - IWATERS database search. USGS. Data obtained from near | | | |
| Ground water is more than 100 feet below the bottom of the buried waste. | Yes | □No | |
| - NM Office of the State Engineer - 1WATERS database search, USGS, Data obtained from near | 1 🔛 | | |
| | | | |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercour (measured from the ordinary high-water mark) | se or lakebed, sinkhole, or playa lake | ∐No | |
| - Topographic map, Visual inspection (certification) of the proposed site | | | |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the Visual inspection (certification) of the proposed site, Aerial photo; satellite image | e time of initial application. | ∐No | |
| Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five househo purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the process. | ne of the initial application | ∐No | |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the | | □No | |
| Within 500 feet of a wetland | Yes | □No | |
| - US Fish and Wildlife Wetland Identification map, Topographic map; Visual inspection (certific | cation) of the proposed site | | |
| Within the area overlying a subsurface mine. | Yes | □No | |
| Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. | Yes | □No · | |
| - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resource Topographic map | | | |
| Within a 100-year floodplain. - FEMA map | Yes | No | |
| On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the follow by a check mark in the box, that the documents are attached. | ving items must bee attached to the closure plan. P | lease indicate, | |
| Siting Criteria Compliance Demonstrations - based upon the appropriate requireme | | | |
| Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC | | | |
| Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC | | | |
| Construction/Design Plan of Temporary Ptt (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC | | | |
| Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 | , | | |
| Waste Material Sampling Plan - based upon the appropriate requirements of Subsection 1. | | İ | |
| Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cu | | achieved) | |
| Soil Cover Design - based upon the appropriate requirements of Subsection H of 1 | _ | ionic vou) | |
| Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 | | | |
| Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC | | | |

| Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief |
|--|
| Name (Print): Title: |
| Signature: Date: |
| e-mail address Telephone |
| C man address: |
| OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number: |
| Closure Report (required within 60 days of closure completion): Subsection K of 1915 1713 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. X Closure Completion Date: July 17, 2008 |
| 22 |
| Closure Method: Waste Excavation and Removal Matternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain |
| Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized. Disposal Facility Name Disposal Facility Permit Number Disposal Facility Name Disposal Facility Permit Number Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and opeartions? |
| Yes (If yes, please demonstrate compliane to the items below) |
| Required for impacted areas which will not be used for future service and operations. Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique |
| 24 Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. |
| X Proof of Closure Notice (surface owner and division) |
| X Proof of Deed Notice (required for on-site closure) |
| X Plot Plan (for on-site closures and temporary pits) |
| X Confirmation Sampling Analytical Results (if applicable) |
| Waste Material Sampling Analytical Results (if applicable) |
| X Disposal Facility Name and Permit Number X Soil Backfilling and Cover Installation |
| X Re-vegetation Application Rates and Seeding Technique . |
| X Site Reclamation (Photo Documentation) |
| On-site Closure Location Latitude: 36.679803 °N Longitude: 107.554276 °W NAD 1927 X 1983 |
| |
| Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan Name (Print). Marie L. Jaramillo Title. Staff Regulatory Tech Singulatory Te |
| Signature Date. 51910 |
| e-mail address: marie e jará millo@conocophillips.com Telephone: 505-326-9865 |

Form C-144

Oil Conservation Division

Page 5 of 5

Burlington Resources Oil Gas Company, LP San Juan Basin Closure Report

Lease Name: SAN JUAN 29-7 UNIT 60N

API No.: 30-039-30448

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached)(Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

| Components | Tests Method | Limit (mg/Kg) | Results |
|------------|---------------------------|---------------|------------|
| Benzene | EPA SW-846 8021B or 8260B | 0.2 | 3.8 ug/kg |
| BTEX | EPA SW-846 8021B or 8260B | 50 | 62.7 ug/kG |
| TPH | EPA SW-846 418.1 | 2500 | 1,350mg/kg |
| GRO/DRO | EPA SW-846 8015M | 500 | 9.2 mg/Kg |
| Chlorides | EPA 300.1 | (1000)/500 | 119 mg/L |

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: BR, BLM, SAN JUAN 29-7 UNIT 60N, UL-J, Sec. 34, T 29N, R 7W, API # 30-039-30448.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent: To: Thursday, July 10, 2008 8:16 AM mark kellv@nm.blm.gov

Subject:

OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N.

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huertano unit 307 Huertano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S

Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San:Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

San-Juan 27-4 Unit 59N.

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907

San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913

San Juan 27-5 Unit 914

San Juan: 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N San Juan 28-5 Unit 77N

San Juan 28-6 Unit 113N

San Juan 28-6 Unit 459S

San Juan 28-7 Unit 151E

San Juan 28-7 Unit 195P

San Juan 29-6. Unit 22N

San Juan 29-6 Unit 8M

San Juan 29-7 Unit 30N

San Juan 29-7 Unit 57E

San Juan 29-7 unit 587

San Juan 29-7 Unit 588

San Juan 29-7 unit 589

San Juan 29-7 Unit 60N

San Juan 29-7 unit 67M

San Juan 29-7 Unit 70M

San Juan 30-5 Unit 27F

San Juan 30-5 Unit 71F

San Juan 30-5 Unit 73N

San Juan 30-6 Unit 441S

San Juan 31-6 Unit 24F

San Juan 31-6 Unit 27M

San Juan 31-6 Unit 31P

San Juan 31-6 Unit 39M

San Juan 31-6 Unit 3M

San Juan 31-6 Unit 45N

San Juan 31-6 Unit 49P

Oan boan 51-6 Ong 491

San Juan 31-6 Unit 4N

San Juan 31-6 Unit 4P

San Juan 31-6 Unit 6F

San Juan 31-6 Unit 7M.

San Juan 31-6 Unit 8N

San Juan 32-7 Unit 18M

San Juan 32-7 Unit 19A

San Juan 32-7 Unit 71A

San Juan 32-7 Unit Com 20

San Juan 32-8 Unit 18N

San Juan 32-8 Unit 30M

San Juan 32-8 Unit 49M

Storey B LS 100

Storey B LS 100S

Sunray E 221S

Sunray G 2C

Vaughn 15N

Wood 3M

Wood 3N

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit

Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

DISTRICT II 1301 Vest Grand Avenue, Artesia, N.M. 88210

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit to Appropriate District Office

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410 State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| API Number | Pool Code BASIN DAKOTA/BLANCO MESAV | ERDE |
|---------------|--|----------------------|
| Property Code | Property Name SAN JUAN 29-7 UNIT | • Well Number 60N |
| OGRID No. | *Operator Name BURLINGTON RESOURCES OIL AND GAS COMPANY LP | Elevation 6685 |


10 Surface Location

| T | L or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Peet from the | East/West line | County |
|------|----------------|--------------|----------|-------------|---------|--------------------|---|---------------|-------------------------------|------------|
| Ĺ | J | 34 | 29-N | 7-W | | 1730' | SOUTH | 1510' | EAST | RIO ARRIBA |
| | | | Landy S | 11 Botto | om Hole | Location I | f Different Fro | m Surface | a Maria. Ann an Annaichtae | |
| ·Γ | UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
| ·Ŀ | P | 34 | 29-N | 7-W | | 710 | SOUTH | 625 | EAST | RIO ARRIBA |
| 19 | Dedicated Acre | 9 <u>′</u> . | | 18 Joint or | Infill | 14 Consolidation (| Code | 15 Order No. | -,. | |
| - 10 | 000.0 | · · | | | | | ا و الموجود و المراجع ا المراجع و المواجع المراجع المر | | | |
| | 320.0 |)U | | | | [4.5] 图 4 题 4.5 。 | | Angelia (T) | | |

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

| 16 | OR A NON-STAI | NDARD UNIT HAS E | EEN APPROVED BY | THE DIVISION |
|----|---|------------------|-----------------|---|
| | | | | OPERATOR CERTIFICATION I hereby certify that the information contained herein to true and complete to the best of my knowledge and bestef, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location province to a contract with an counier of such a mineral or a working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. |
| | | USA SF | -078425 | Signature Printed Name |
| | SURFACE LAT: 36,40,7804', N. LONG: 10733.2313' W. NAD 1927 LAT: 36,679847' N. LONG: 107.554462' W. NAD 1983 | SURPACE | 1510° | 18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my bestig. Date of Survey. NEWS |
| | BOTTOM HOLE LAT: 36'40.6219' N. LONG: 107'33.0512' W. NAD 1927 LAT: 36.677039' N. LONG: 107.551460' W. NAD 1983 | 1730 | BOTTOM HOLE 625 | Signature 664 Seel Mr. Professionel Surveyor. |

BURLINGTON RESOURCES OIL & GAS COMPANY LP SAN JUAN 29-7 UNIT 60N, 1730' FSL & 1510' FEL SECTION 34, T-29-N, R-7-W, NMPM, RIO ARRIBA COUNTY, NM GROUND ELEVATION: 6685', DATE: SEPTEMBER 21, 2007

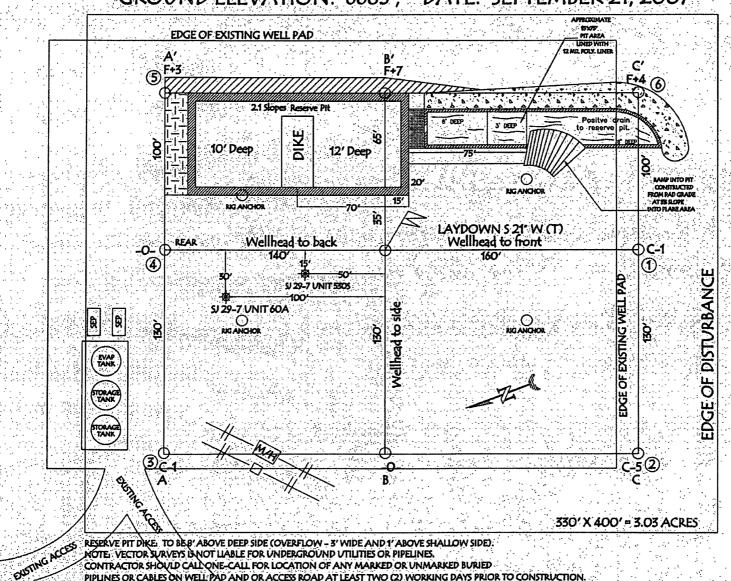

LATITUDE: 36:40.7904:N LONGITUDE: 107:23.2313:W NAD27



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

| Client | ConocoPhillps | Project #: | 96052-0026 |
|----------------------|-------------------|---------------------|------------|
| Sample ID: | SJ 29-7 #60N | Date Reported: | 07-23-08 |
| Laboratory Number: | 464 19 | Date Sampled: | 07-17-08 |
| Chain of Custody No: | 4803 | Date Received: | 07-18-08 |
| Sample Matrix: | Soil | Date Extracted: | 07-21-08 |
| Preservative: | | Date Analyzed: | 07-22-08 |
| Condition: | Intact | Analysis Requested: | 8015 TPH |

| Parameter | Concentration (mg/Kg) | Det. Limit (mg/Kg) |
|------------------------------|--------------------------|--------------------------|
| Gasoline Range (C5 - C10) | ND | 0.2 |
| Diesel Range (C10 - C28) | 9.2 | 0.1 |
| Total Petroleum Hydrocarbons | 9.2 | 0.2 |

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Christian Washer Beview



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

| Client: | ConocoPhillps | Project #: | 96052-0026 |
|----------------------|-------------------------|---------------------|------------|
| Sample ID: | SJ 29-7 #60N Background | Date Reported: | 07-23-08 |
| Laboratory Number: | 46420 | Date Sampled: | 07-17-08 |
| Chain of Custody No: | 4803 | Date Received: | 07-18-08 |
| Sample Matrix: | Soil | Date Extracted: | 07-21-08 |
| Preservative: | | Date Analyzed: | 07-22-08 |
| Condition: | Intact | Analysis Requested: | 8015 TPH |

| Parameter | Concentration (mg/Kg) | Det. Limit (mg/Kg) |
|------------------------------|--------------------------|--------------------------|
| Gasoline Range (C5 - C10) | ND | 0.2 |
| Diesel Range (C10 - C28) | ND | 0.1 |
| Total Petroleum Hydrocarbons | ND | 0.2 |

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Christian Wasters Review



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

| Client: | QA/QC | Project #: | N/A |
|--------------------|--------------------|---------------------|----------|
| Sample ID: | 07-22-08 QA/QC | Date Reported: | 07-23-08 |
| Laboratory Number: | 46419 | Date Sampled: | N/A |
| Sample Matrix: | Methylene Chloride | Date Received: | N/A |
| Preservative: | N/A | Date Analyzed: | 07-22-08 |
| Condition: | N/A | Analysis Requested: | TPH |

| | Leal Date | FCall RF | C=CalRF | % Difference | Accept Range |
|-------------------------|-----------|-------------|-------------|--------------|--------------|
| Gasoline Range C5 - C10 | 05-07-07 | 1.0103E+003 | 1.0107E+003 | 0.04% | 0 - 15% |
| Diesel Range C10 - C28 | 05-07-07 | 9.9039E+002 | 9.9079E+002 | 0.04% | 0 - 15% |

| Blank Gonc. (mg/Lamg/Kg) | Concentration | Detection Limit |
|------------------------------|---------------|-----------------|
| Gasoline Range C5 - C10 | ND | 0.2 |
| Diesel Range C10 - C28 | ND | 0.1 |
| Total Petroleum Hydrocarbons | ND | 0.2 |

| Duplicate Conc. (mg/Kg) | Sample | Duplicate: | % Difference | - Accept: Range |
|-------------------------|--------|------------|--------------|-----------------|
| Gasoline Range C5 - C10 | ND | ND | 0.0% | 0 - 30% |
| Diesel Range C10 - C28 | 9.2 | 9.1 | 1.1% | 0 - 30% |

| Spike Conc. (mg/Kg) | Sample | Spike Added | Spike Result | % Recovery | Accept Range |
|-------------------------|--------|-------------|--------------|------------|--------------|
| Gasoline Range C5 - C10 | ND | 250 | 246 | 98.4% | 75 - 125% |
| Diesel Range C10 - C28 | 9.2 | 250 | 257 | 99.2% | 75 - 125% |

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 46419 - 46428.

Analvet



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

| Client | ConocoPhillips | Project #: | 96052-0026 |
|--------------------|----------------|---------------------|------------|
| Sample ID: | SJ 29-7 #60N | Date Reported: | 07-23-08 |
| Laboratory Number: | 46419 | Date Sampled: | 07-17-08 |
| Chain of Custody: | 4803 | Date Received: | 07-18-08 |
| Sample Matrix: | Soîl | Date Analyzed: | 07-22-08 |
| Preservative: | | Date Extracted: | 07-21-08 |
| Condition: | Intact | Analysis Requested: | BTEX |

| Parameter | Concentration (ug/Kg) | Det. Limit (ug/Kg) |
|--------------|--------------------------|--------------------------|
| Benzene | 3.8 | 0.9 |
| Toluene | 13.1 | 1.0 |
| Ethylbenzene | 4.6 | 1.0 |
| p,m-Xylene | - 34.4 | 1.2 |
| o-Xylene | 6.8 | 0.9 |
| Total BTEX | 62.7 | |

ND - Parameter not detected at the stated detection limit.

| Surrogate Recoveries: | Parameter | Percent Recovery | |
|-----------------------|---------------------|------------------|--|
| | Fluorobenzene | 98.0 % | |
| | 1,4-difluorobenzene | 98.0 % | |
| | Bromochlorobenzene | 98.0 % | |

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Mestry Walter Beview



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

| Client: | ConocoPhillips | Project #: | 96052-0026 |
|--------------------|-------------------------|---------------------|------------|
| Sample ID: | SJ 29-7 #60N Background | Date Reported: | 07-23-08 |
| Laboratory Number: | 46420 | Date Sampled: | 07-17-08 |
| Chain of Custody: | 4803 | Date Received: | 07-18-08 |
| Sample Matrix: | Soil | Date Analyzed: | 07-22-08 |
| Preservative: | | Date Extracted: | 07-21-08 |
| Condition: | Intact | Analysis Requested: | BTEX |

| Parameter | Concentration (ug/Kg) | Det. Limit (ug/Kg) |
|--------------|--------------------------|--------------------------|
| Benzene | ND | 0.9 |
| Toluene | ND | 1.0 |
| Ethylbenzene | ND | 1.0 |
| p,m-Xylene | ND | 1.2 |
| o-Xylene | ND | 0.9 |
| Total BTEX | ND | |

ND - Parameter not detected at the stated detection limit.

| Surrogate Recoveries: | Parameter | Percent Recovery |
|-----------------------|---------------------|------------------|
| | Fluorobenzene | 98.0 % |
| | 1,4-difluorobenzene | 98.0 % |
| | Bromochlorobenzene | 98.0 % |

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Christiu m Wales



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

| Client | N/A | Project #: | N/A |
|--------------------|----------------|----------------|----------|
| Sample ID: | 07-22-BT QA/QC | Date Reported: | 07-23-08 |
| Laboratory Number: | 46419 | Date Sampled: | N/A |
| Sample Matrix: | Soil | Date Received: | N/A |
| Preservative: | N/A | Date Analyzed: | 07-22-08 |
| Condition: | N/A | Analysis: | BTEX |

| Calibration and Detection Limits (Ug/L | Calibra | C Cal RF: Accept (Rand | | Blank Conc | Detect & Limit |
|--|-------------|---------------------------|------|---------------|----------------|
| Benzene | 1.0042E+008 | 1.0063E+008 | 0.2% | ND | 0.1 |
| Toluene | 7.4907E+007 | 7.5057E+007 | 0.2% | ND | 0.1 |
| Ethylbenzene | 5.9002E+007 | 5.9120E+007 | 0.2% | ND | 0.1 |
| p,m-Xylene | 1.2028E+008 | 1.2052E+008 | 0.2% | ND | 0.1 |
| o-Xylene | 5.7325E+007 | 5.7440E+007 | 0.2% | ND | 0.1 |

| Duplicate Conc. (ug/Kg) | Sample D | uplicate | %Diff | Accept Range | Detect Limit |
|-------------------------|----------|----------|-------|--------------|--------------|
| Benzene | 3.8 | 3.7 | 2.6% | 0 - 30% | 0.9 |
| Toluene | 13.1 | 12.8 | 2.3% | 0 - 30% | 1.0 |
| Ethylbenzene | 4.6 | 4.2 | 8.7% | 0 - 30% | 1.0 |
| p,m-Xylene | 34.4 | 33.3 | 3.2% | 0 - 30% | 1.2 |
| o-X yle ne | 6.8 | 6.5 | 4.4% | 0 - 30% | 0.9 |

| Spike Conc. (ug/Kg) | Sample Amo | unt Spiked Spik | ed Sample | % Recovery | Accept Range |
|---------------------|------------|-----------------|-----------|------------|--------------|
| Benzene | 3.8 | 50.0 | 53.4 | 99.3% | 39 - 150 |
| Toluene | 13.1 | 50.0 | 61.1 | 96.8% | 46 - 148 |
| Ethylbenzene | 4.6 | 50.0 | 51.6 | 94.5% | 32 - 160 |
| p,m-Xylene | 34.4 | 100 · | 128 | 95.5% | 46 - 148 |
| o-Xylene | 6.8 | 50.0 | 51.8 | 91.2% | 46 - 148 |

ND - Parameter not detected at the stated detection limit.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 46419 - 46421, 46423, 46424, 46426 - 46428, and 46441.

Analyst



CATION / ANION ANALYSIS

| Client: | ConocoPhillips | Project #: | 96052-0026 |
|--------------------|----------------|-----------------|------------|
| Sample ID: | SJ 29-7 #60N | Date Reported: | 07-24-08 |
| Laboratory Number: | 46419 | Date Sampled: | 07-17-08 |
| Chain of Custody: | 4803 | Date Received: | 07-18-08 |
| Sample Matrix: | Soil Extract | Date Extracted: | 07-21-08 |
| Preservative: | | Date Analyzed: | 07-22-08 |
| Condition: | Intact | | |

| | Analytical | | | |
|-------------------------------|------------|----------|-------|-------|
| Parameter | Result | Units | | |
| pH | 7.01 | s.u. | | |
| Conductivity @ 25° C | 810 | umhos/cm | | |
| Total Dissolved Solids @ 180C | 528 | mg/L | | |
| Total Dissolved Solids (Calc) | 510 | mg/L | | |
| SAR | 5.5 | ratio | | |
| Total Alkalinity as CaCO3 | 136 | mg/L | | |
| Total Hardness as CaCO3 | 109 | mg/L | | |
| Bicarbonate as HCO3 | 139 | mg/L | 2.28 | meq/L |
| Carbonate as CO3 | <0.1 | mg/L | 0.00 | meq/L |
| Hydroxide as OH | <0.1 | mg/L | 0.00 | meq/L |
| Nitrate Nitrogen | <0.1 | mg/L | 0.00 | meq/L |
| Nitrite Nitrogen | <0.01 | mg/L | 0.00 | meg/L |
| Chloride | 119 | mg/L | 3.36 | meq/L |
| Fluoride | 6.44 | mg/L | 0.34 | meq/L |
| Phosphate | <0.1 | mg/L | 0.00 | meq/L |
| Sulfate | 113 | mg/L | 2.35 | meq/L |
| Iron | 0.422 | · mg/L | 0.02 | meq/L |
| Calcium | 34.7 | mg/L | 1.73 | meq/L |
| Magnesium | 5.37 | mg/L | 0.44 | meq/L |
| Potassium | 17.6 | mg/L | 0.45 | meq/L |
| Sodium | 131 | mg/L | 5.70 | meq/L |
| Cations | | | 8.34 | meq/L |
| Anions | | | 8.33 | meq/L |
| Cation/Anion Difference | | | 0.11% | |

Reference: U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Drilling Pit Sample.

Analyst

Review Deceter



CATION / ANION ANALYSIS

| Client: | ConocoPhillips | Project #: | 96052-0026 |
|--------------------|-------------------------|-----------------|------------|
| Sample ID: | SJ 29-7 #60N Background | Date Reported: | 07-24-08 |
| Laboratory Number: | 46420 | Date Sampled: | 07-17-08 |
| Chain of Custody: | 4803 | Date Received: | . 07-18-08 |
| Sample Matrix: | Soil Extract | Date Extracted: | 07-21-08 |
| Preservative: | | Date Analyzed: | 07-22-08 |
| Condition: | Intact | | |
| | | | |

| | Analytical | | 11-14-14-1-T-1-1-1-1-1-1-1-1-1-1-1-1-1-1 | angen en septembre en service de la companya de la |
|-------------------------------|------------|----------|--|--|
| Parameter | Result | Units | | |
| pH | 8.02 | s.u. | | |
| Conductivity @ 25° C | 186 | umhos/cm | | |
| Total Dissolved Solids @ 180C | 108 | mg/L | | |
| Total Dissolved Solids (Calc) | 91.3 | mg/L | | |
| SAR | 2.8 | ratio | | |
| Total Alkalinity as CaCO3 | 79.0 | mg/L | | |
| Total Hardness as CaCO3 | 19.8 | mg/L | | |
| Bicarbonate as HCO3 | 69.0 | mg/L | 1.13 | meq/L |
| Carbonate as CO3 | 10.0 | mg/L | 0.33 | meq/L |
| Hydroxide as OH | <0.1 | mg/L | 0.00 | meq/L |
| Nitrate Nitrogen | 1.61 | mg/L | 0.03 | meq/L |
| Nitrite Nitrogen | 0.130 | mg/L | 0.00 | meq/L |
| Chloride | 2.39 | mg/L | 0.07 | meq/L |
| Fluoride | 0.340 | mg/L | 0.02 | meq/L |
| Phosphate | <0.1 | mg/L | 0.00 | meq/L |
| Sulfate | 2.84 | mg/L | 0.06 | meq/L |
| Iron: | 0.265 | · mg/L | 0.01 | meq/L |
| Calcium | 7.07 | mg/L | 0.35 | meq/L |
| Magnesium | 0.515 | mg/L | 0.04 | meq/L |
| Potassium | 0.226 | mg/L | 0.01 | meq/L |
| Sodium | 28.2 | mg/L | 1.23 | meq/L |
| Cations | | | 1.64 | meq/L |
| Anions | | | 1.64 | meq/L |
| Cation/Anion Difference | | | 0.03% | |

Reference: U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Drilling Pit Sample.

Analyst

Review Walley



TRACE METAL ANALYSIS

| Client: | ConocoPhillips | Project #: | 96052-0026 |
|--------------------|----------------|------------------|---------------------|
| Sample ID: | SJ 29-7 #60N | Date Reported: | 07-24-08 |
| Laboratory Number: | 46419 | Date Sampled: | 07-17-08 |
| Chain of Custody: | 4803 | Date Received: | 07-18-08 |
| Sample Matrix: | Soil | Date Analyzed: | 07-22-08 |
| Preservative: | | Date Digested: | 07-18-08 |
| Condition: | Intact | Analysis Needed: | Total Metals |
| | | • | |

| Parameter | Concentration (mg/Kg) | Det. Limit (mg/Kg) | TCLP Regulatory Level (mg/Kg) |
|-----------|--------------------------|--------------------------|-------------------------------------|
| Arsenic | ND | 0.001 | 5.0 |
| Barium | 11.6 | 0.001 | 100 |
| Cadmium | 0.006 | 0.001 | 1.0 |
| Chromium | 0.288 | 0.001 | 5.0 |
| Lead | 0.341 | 0.001 | 5.0 |
| Mercury | ND | 0.001 | 0.2 |
| Selenium | ND | 0.001 | 1.0 |
| Silver | ND | 0.001 | 5.0 |

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Drilling Pit Sample.

Analyst

Review Walter



TRACE METAL ANALYSIS

| | | • | |
|--------------------|-------------------------|------------------|--------------|
| Client: | ConocoPhillips | Project #: | 96052-0026 |
| Sample ID: | SJ 29-7 #60N Background | Date Reported: | 07-24-08 |
| Laboratory Number: | 46420 | Date Sampled: | 07-17-08 |
| Chain of Custody: | 4803 | Date Received: | 07-18-08 |
| Sample Matrix: | Soil | Date Analyzed: | 07-22-08 |
| Preservative: | | Date Digested: | 07-18-08 |
| Condition: | Intact | Analysis Needed: | Total Metals |
| | | | |

| Parameter | Concentration (mg/Kg) | Det. Limit (mg/Kg) | TCLP Regulatory Level (mg/Kg) |
|-----------|--------------------------|--------------------------|-------------------------------------|
| | | | |
| Arsenic | ND | 0.001 | 5.0 |
| Barium | 7.32 | 0.001 | 100 |
| Cadmium | ND | 0.001 | 1.0 |
| Chromium | 0.187 | 0.001 | 5.0 |
| Lead | 0.686 | 0.001 | 5.0 |
| Mercury | ND | 0.001 | 0.2 |
| Selenium | 0.044 | 0.001 | 1.0 |
| Silver | ND | 0.001 | 5.0 |

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Drilling Pit Sample.

Analyst

Review



TRACE METAL ANALYSIS Quality Control / Quality Assurance Report

80% - 120%

| Client: | | QA/QC | | Project #: | | QA/QC | |
|--|--------------------------------------|-------|-----------|--------------------|-----------|----------|------------|
| Sample ID: | le ID: 07-22 TM Q | | QA/AC | VAC Date Reported: | | 07-24-08 | |
| Laboratory Number: 46419 Sample Matrix: Soil | | | Date San | pled: | | N/A | |
| | | Soil | | Date Rec | eived: | | N/A |
| Analysis Requested: | nalysis Requested: Total RCRA Metals | | A Metals | Date Anal | lyzed: | | 07-22-08 |
| Condition: | | N/A | | Date Dige | ested: | | 07-18-08 |
| | Instrument | | Detection | Sample | Duplicate | % | Acceptance |
| | lank (mg/Kg | | Limit | | | Diff. | Range |
| Arsenic | ND | ND | 0.001 | ND | ND | 0.0% | 0% - 30% |
| Barium | ND | ND | 0.001 | 11.6 | 11.6 | 0.0% | 0% - 30% |
| Cadmium | ND | ND | 0.001 | 0.006 | 0.006 | 0.0% | 0% - 30% |
| Chromium | ND | ND | 0.001 | 0.288 | 0.302 | 4.6% | 0% - 30% |
| Lead | ND | ND | 0.001 | 0.341 | 0.343 | 0.6% | 0% - 30% |
| Mercury | ND, | ND | 0.001 | ND | ND | 0.0% | 0% - 30% |
| Selenium | ND | ND | 0.001 | ND | ND | 0.0% | 0% - 30% |
| Silver | ND | ND | 0.001 | ND | ND | 0.0% | 0% - 30% |
| Spike | | Spike | Sample | Spiked | Percent | | Acceptance |
| Conc. (mg/Kg) | | Added | | Sample | Recovery | | Range |
| Arsenic | | 0.250 | ND | 0.249 | 99.6% | | 80% - 120% |
| Barium | | 0.500 | 11.6 | 12.2 | 101% | | 80% - 1209 |
| Cadmium | | 0.250 | 0.006 | 0.259 | 101% | | 80% - 120% |
| Chromium | | 0.500 | 0.288 | 0.791 | 100.3% | | 80% - 120% |
| Lead | | 0.500 | 0.341 | 0.846 | 101% | | 80% - 120% |
| Mercury | | 0.100 | ND | 0.098 | 98.2% | | 80% - 120% |
| Selenium ' | | 0.100 | ND | 0.099 | 99.0% | | 80% - 120% |
| | | | | | | | |

ND - Parameter not detected at the stated detection limit.

References:

Silver

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

ND

SW-846, USEPA, December 1996.

0.100

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

0.090

90.4%

Spectorscopy, SW-846, USEPA, December 1996.

Comments:

QA/1QC for Sample 46419 - 46421, 46427, 46428 and 46436 - 46439.

Analyst



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:

Burlington

Project #:

92115-1207

Sample No.:

1

Date Reported: Date Sampled:

2/17/2010

Sample ID:

5 pt Composite

2/15/2010

Sample Matrix:

Soil

Date Analyzed: 2

2/15/2010

Preservative:

Cool

Analysis Needed:

TPH-418.1

Condition:

Cool and Intact

| | | Det. |
|-----------|---------------|---------|
| | Concentration | Limit |
| Parameter | (mg/kg) | (mg/kg) |

Total Petroleum Hydrocarbons

1,350

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis

of Water and Waste, USEPA Storet No. 4551, 1978.

Comments:

San Juan 29-7 Unit 60N

Instrument calibrated to 200 ppm standard. Zeroed before each sample

Analyst

Joshua M Kirchner

Printed

.

James McDaniel

Printed

| | | | | | | ٠, ٠ | | | | | | | | | | | |
|---|--|---------------------------|-------------------------|--|--|--|--|---------------|---------------------------------|------------------|------------------------------------|--|-------|-------------------|--|---------------|----------|
| Submit To Appropriate District Office Two Copies | | | | State of New Mexico | | | | | | | Form C-105 | | | | | | |
| District I 1625 N French Dr., Hobbs, NM 88240 | | | | Energy, Minerals and Natural Resources | | | | | | + | July 17, 2008 | | | | | | |
| District II 1301 W Grand Ave | , | Oil Conservation Division | | | | | | | 1. WELL API NO. 30-039-30445 | | | | | | | | |
| District III | | | | | | | | | _ | 2. Type of Lease | | | | | | | |
| 1000 Rio Brazos Rd <u>District IV</u> | | | | 20 South S | | | | • | F | STA' | | FEE | | ED/IND | IAN | | |
| 1220 S St Francis Dr., Santa Fe, NM 87505 | | | | | | Santa Fe, 1 | NIVI O | 7303 | | • | - 1 | 3. State Oil & Gas Lease No SF-078425 | | | | | |
| WELL C | COMP | LETION | ORF | RECO | MPL | ETION RE | POR | TAN | DΙ | LOG | | | | | | | |
| 4 Reason for filing | ng | | | | | • | | | | | 1 | 5. Lease Name or Unit Agreement Name | | | | | |
| ☐ COMPLETI | ON REI | PORT (Fill i | n boxes # | ‡1 throu | hrough #31 for State and Fee wells only) | | | | | | SAN JUAN 29-7 UNIT 6. Well Number: | | | | | | |
| □ C-144 CLOS | SURE AT | ГТАСНМЕ | NT (Fill | ın boxe | s#1 thr | rough #9, #15 Date Rig Released and #32 and/or | | | | 1, | 60N · | | | | | | |
| #33; attach this an | nd the pla | | | | | | | | | | | | | | | | |
| 7 Type of Comp | | □ worko | VER □ | DEEPE | NING | □PLUGBAC | к П п | IFFERI | ENT | RESERVO | ΙR | □ OTHER | | | | | |
| 8 Name of Opera | itor | | | | DEEPENING PLUGBACK DIFFERENT RESERVOIR | | | | | | 9 | 9 OGRID | | | | | |
| Burlington Re | | es Oil Ga | s Com | pany, | <u>LP</u> | | | | | | 14538 | | | | | | |
| PO Box 4298, Fat | | , NM 87499 | | | | | | | | | | i i. Fooi name | OI WI | iucai | | | • |
| 12.Location | Unit Ltr | Sectio | n I | Township Range Lot | | | | Feet from the | | | +, | N/S Line Fe | | Feet from the E/V | | E/W Line Coun | |
| Surface: | OIII EII | Section | ** | 104113 | | ixange | 100 | | + | - CCt Holli the | + | 14/5 Ellic | 1 000 | nom the | 1 27 17 | | County |
| BH: | | | | | | | | | + | | ÷ | | | | | | |
| 13. Date Spudded | 1 14. D | Date T.D. Rea | ached | 15. E | Date Rig | Released | <u> </u> | 10 | 6. D | ate Complete | ed (| Ready to Proc | luce) | 1 | 1. 7. Eleva | tions (DF | and RKB, |
| | | | | 04/08 | 3/08 | | | | | | | | | | T, GR, e | | |
| 18. Total Measure | ed Depth | of Well | | 19. Plug Back Measured Depth | | | | 20 | 0. V | Vas Direction | nal | al Survey Made? 21. | | | Type Electric and Other Logs Run | | |
| 22. Producing Inte | erval(s), | of this comp | letion - T | Top, Bot | tom, Na | ame | | L | | | | | | | | | |
| | | | | | | | | | | | | | | | | | = |
| 23. | 75 | WEIG | UT LD /F | | CAS | ING REC | ORD | | <u> </u> | | ng | | | CORD | | MOLINIT | DULLED |
| CASING SIZ | CASING SIZE WEIGHT LB | | | FT. DEPTH SET | | | | H | HOLE SIZE | | | CEMENTING RECORD | | | AMOUNT PULLED | | |
| | | | | | | | | | | | 1 | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | _ | | | | | | |
| 24. | | <u> </u> | · | | LIN | ER RECORD | | | | 12 | 25. | т | TIRIN | NG REC | ORD | | |
| SIZE | ТОР | | BOT | TTOM SACKS CEMENT | | | IENT | | | | SIZE | | | | | | |
| | | | | , 1 | | | | | | | | | | | | | |
| 26 Perforation | record (i | interval cira | and num | nhar) | | | | 27 44 | CID | SUOT E | D A | CTUDE CE | MEN | T SOU | EE7E | ETC | |
| 26. Perforation record (interval, size, and no | | | | imoci) | | | | | DEPTH INTERVAL | | | RACTURE, CEMENT, SQUEEZE, ETC. AMOUNT AND KIND MATERIAL USED | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | ļ | | | | _ | | | | | | |
| | | | | | | | DDO | DUC | ויחיי | ION | | | | | | • | |
| Date First Product | tion | | Producti | on Meti | od (Fle | owing, gas lift, j | | | | | | Well Status | (Proc | l or Shut | -in) | | |
| | | | | | , | | 7 . 6 | | • | 21 1 1 1 2 | | | | | | | |
| Date of Test | Hour | s Tested | Cho | ke Sıze | | Prod'n For | | Oıl - B | bl | G | Gas · | - MCF | Wa | ater - Bbl | | Gas - C | il Ratio |
| | Parte of Test | | | | | Test Period | | | 1 | | | | | | | | |
| Flow Tubing Casing Pressure Cal | | Calc | lculated 24- Oil - Bbl. | | | Gas - MCF | | W | Water - Bbl. | | Oil Gravity - API - (Corr.) | | r.) | | | | |
| Press. | | our Rate | | | | | | | | | | | | | | | |
| 29. Disposition of | 29. Disposition of Gas (Sold, used for fuel, vented, etc.) 30 Test Witnessed By | | | | | | | | | | | | | | | | |
| 31 List Attachme | ents | | | • | | | | | | | | | | | | | |
| 32. If a temporary | pit was | used at the v | vell, attac | h a plat | with th | e location of the | e tempo | rary pit. | | | | | | | | | |
| 33. If an on-site b | ourial was | s used at the | well, rep | ort the e | xact lo | cation of the on- | site bur | ial: | | | | | | | | | |
| | | Latitu | de 36.67 | 9803°N | Lo | ngitude 107.55 | 4276°W | NAD | | 1927 🛛 198: | 3 | | | | | | |
| I hereby certif | fy fthat i | thelinform | ation \$ | họyvn c | | <i>h sides of thi.</i> nted | s form | is true | e an | id complet | te t | o the best o | f my | knowle | dge an | d beliej | • |
| Signature | // <i>(M</i> | NY1/1) | Pad (| IJ | | ne Marie E. | Jaram | nillo | Tit | tle: Staff | Re | gulatory T | ech | Date | e: 3/4/2 | 2010 | |
| F-mail Address | ss mar | ie e jaram | illo@cc | / . mocor | hillin | s.com | | | | | | | | | | | |
| E-mail Address marie.e.jaramillo@conocophillips.com | | | | | | | | | | | | | | | | | |

ConocoPhillips

| Pit Closure Form: | | |
|-----------------------------------|----------------------------|----------------|
| Date: 7/17/08 | · m | |
| Well Name: SANG | WAN 29-7 #60N | . |
| Footages: 1730 FS | L 1510'FEL | Unit Letter: |
| Section: <u>34</u> , T- <u>29</u> | -N, R- 7 -W, County: 💯 | AREBOState: NM |
| Contractor Closing Pit: | HOR SPRYLCE | <u>\$</u> |
| Construction Inspector: | ART SANCHEZ ANT SANCHEZ | Date: |
| mopeotor orginataror | 0 | |

Jaramillo, Marie E

From:

Busse, Dollie L

Sent:

Thursday, July 10, 2008 9:44 AM

To:

Brandon Powell@state nm.us; Mark Kelly; Robert Switzer; Sherrie Landon

Cc:

Chavez, Virgil E; Kramme, Jeff L; acedragline@yahoo.com; Blair, Maxwell O; Blakley, Maclovia; Clark, Joan E; Farrell, Juanita R; Finkler, Jane; Maxwell, Mary A (SOS Staffing

Services, Inc.); McWilliams, Peggy L; Seabolt, Elmo F

Subject:

Clean Up Notice - San Juan 29-7 Unit 60

Importance:

High

Attachments:

San Juan 29-7 Unit 60N.pdf

Ace Services will move a tractor to the **SJ 29-7 60N** on **Tuesday**, **July 15** to start the reclamation process. Please contact Johnny McDonald (215-2861) if you have any questions or need additional information. Thanks!

Dollie

Network #: 10204833 (NANN)

Operator:

Burlington Resources

Legals:

1730' FSL, 1510' FEL Section 34, T29N, R7W Unit Letter 'J' (NWSE) Rio Arriba County, NM

API#:

30-039-30448

Surface/Minerals:

BLM/BLM



Dollie L. Busse

ConocoPhillips Company-SJBU


Construction Technician
Project Development
505-324-6104

505-599-4062 (fax)


Dollie.L.Busse@conocophillips.com


ConocoPhillips

| Reclamation Form: |
|---|
| Date: 9/10/0\$ |
| Well Name: SAN JUAN 29-7#60N |
| Footages: 1730' FSL 1510' FEL Unit Letter: |
| Section: 34, T-29-N, R-7-W, County: Radical State: MM |
| Reclamation Contractor: HCE SERVICES |
| Reclamation Date: 7/18/08 |
| Road Completion Date: 7/30/0,8 |
| Seeding Date: $\frac{9/10/0}{6}$ |
| 1 |
| Construction Inspector: 4RT SAICHEZ Date: 9/10/08 |
| Inspector Signature: At Sanchy |
| O |

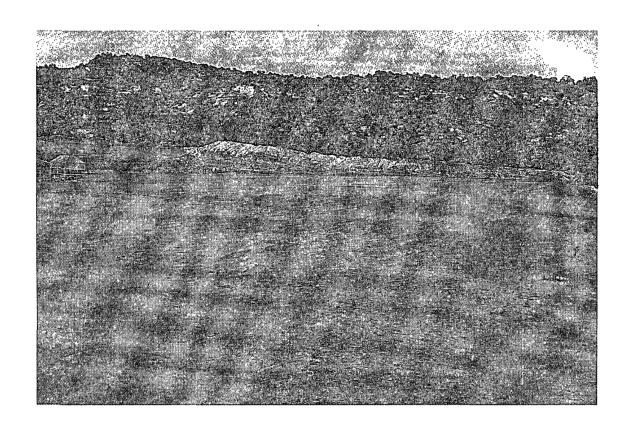



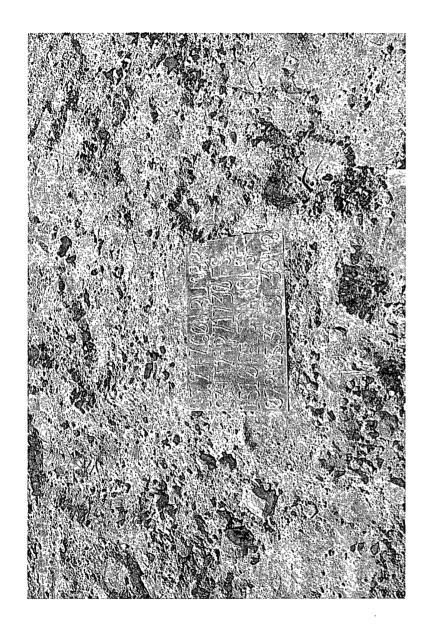

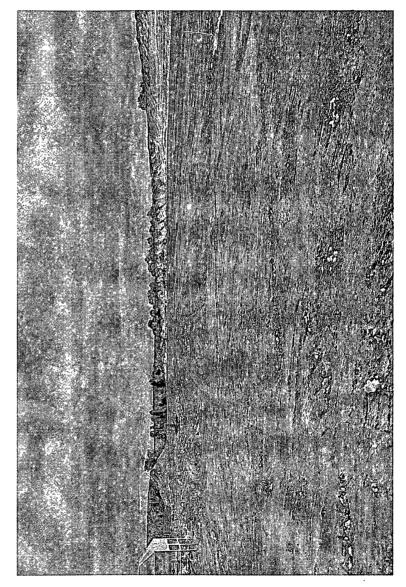

WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NAME: San Juan 29-7 Unit #60N

API#: 30-039-30448

| DATE | INSPECTOR | SAFETY CHECK | LOCATION CHECK | PICTURES TAKEN | COMMENTS |
|---------|--------------|-----------------|-------------------|-------------------|---|
| 3/5/08 | Art Sanchez | Х | Х | X | MOTE setting surface |
| 3/13/08 | Art Sanchez | Х | X | X | Surface has been set |
| 3/20/08 | Art Sanchez | Х | Х | Х | |
| 3/28/08 | Art Sanchez | Х | Х | Х | |
| 4/3/08 | Art Sanchez | Х | Х | Х | AWS # 730 drilling rig on location |
| 4/23/08 | Art Sanchez | Х | Х | Х | Called MVCI to repair fence and liner |
| 4/30/08 | Art Sanchez | Х | Х | X | Schlumberger FRAC crew on location |
| 5/8/08 | Art Sanchez | Х | X | Х | Called MVCI to repair holes in liner, oil stains on location |
| 5/15/08 | Art Sanchez | Х | Х | Х | Called MVCI to repair holes on apron |
| 5/28/08 | Rodney Woody | Х | Х | Х | Called MVCI to repair holes |
| 6/5/08 | Rodney Woody | Х | Х | Х | Called MVCI for liner repair and melted blow pit called Brandon with OCD, Sierra on location setting FRAC |
| 6/12/08 | Rodney Woody | Х | Х | X | Called MVCI to tighten fence and barb, called Brandon with OCD, Sierra on location setting facilities |
| 6/19/08 | Rodney Woody | Х | X | Х | Pit and location look good, MVCI on location doing repairs |
| 6/26/08 | Rodney Woody | Х | Х | Х | Pit and location looks good |
| 7/3/08 | Rodney Woody | Х | Χ | Х | Pit and location looks good |
| 7/10/08 | Rodney Woody | Х | Х | Х | Called MVCI to patch holes |