UNITED STATES DEPARTMENT OF THE INTERIOR



BUREAU OF LAND MANAGEMENT

BUREAU OF LAND MANAGEMENT	SEP 06 2011
Sundry Notices and Reports on Wells	
	Farmington Field Office
1. Type of Well	SF-079193 6. If Indian, All. or
GAS	Tribe Name
2. Name of Operator	7. Unit Agreement Name
2. Name of Operator BURLINGTON	San Juan 28-6 Unit
RESOURCES OIL & GAS COMPANY LP	
- TOO OF TOO ON A CONTACT IN	8. Well Name & Number
3. Address & Phone No. of Operator	San Juan 28-6 Unit 143P
PO Box 4289, Farmington, NM 87499 (505) 326-9700	9. API Well No.
	7. All Well No.
A Location of Well Footogs See T. D. M.	30-039-30805
4. Location of Well, Footage, Sec., T, R, M	10. Field and Pool
Surface: Unit K (NESW), 1473' FSL & 1570' FWL, Section 20, T28N, R6W, NMPM	Blanco MV/Basin DK
BH: Unit N (SESW), 727' FSL & 2243' FWL, Section 20, T28N, R6W, NMPM	11. County and State
	Rio Arriba, NM
Recompletion New Construction X Subsequent Report Plugging Non-Routine Fracturing Casing Repair Water Shut off Final Abandonment Altering Casing Conversion to Injection 13. Describe Proposed or Completed Operations Attached is a drawing for the placement of the cathodic ground, rectifier and cable for the subjection	t well 456789101725
14. I hereby certify that the foregoing is true and correct.	OIL CONS. D. Date On J 1
Signed Denise Journey Title: Staff Regular	tory Technician Date 9-1,-1/
(This space for Federal or State Office use)	
APPROVED BY Title CONDITION OF APPROVAL, if any:	Date
Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.	
·	TED FOR RECORD
_	PD 0 0 0044

SEP 0 8 2011


FARMINGTON FIELD OFFICE BY____





San Juan 28-6 Unit 143P

Section 20, T28N, R6W, N.M.P.M., Rio Arriba County, NM

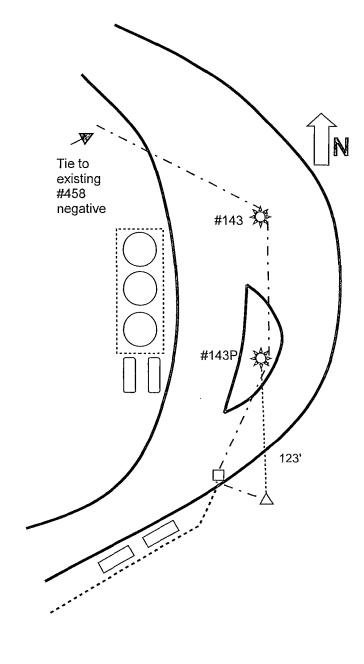

	COPC Pipeline Negative Cable Positive Cable Pipeline
	UGAC
	Separator
Meter Run	
Rectifier	
△ Ground Bed	
*	Wellhead

Drill ground bed approximately 123' south of #143P wellhead at staked location. Install 40/16 3 negative rectifier at staked location. Install cables to new ground bed, and #143P, #143, & #458 wellheads, and existing UGAC at lengths below. Repair cables as needed. UGAC will need to be repaired that runs to #127M location. Disconnect box is located on SJ 28-6 #87.

#143P Cables:

Negative: 117'

Positive: 45'

UGAC: ≈ 200'

#143 Cables:

Negative: 187'

#458 Cables:

Negative: 487'

Total Ditch: 687'

By: Steven Gillette Date: 10/6/10