UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

SEP 06 2011


Sundry Notices and Reports on Wells	Garmington Field Office Bureau of Land Managemen.
	5. Lease Number
1. Type of Well	NM-012708
1. Type of Well GAS	6. If Indian, All. or Tribe Name
2 Name of Operator	7. Unit Agreement Name
2. Name of Operator BURLINGTON	
RESCURCES OIL & GAS COMPANY LP	
3. Address & Phone No. of Operator	8. Well Name & Number Lively 25N
PO Box 4289, Farmington, NM 87499 (505) 326-9700	9. API Well No.
4. Location of Well, Footage, Sec., T, R, M	30-045-34910
Surface: Unit N (SESW), 1136' FSL & 1887' FWL, Section 29, T30N, R8W, NN	10. Field and Pool MPM Blanco MV/Basin DK
BH: Unit N (SESW), 682', FSL & 1876' FWL, Section 29, T30N, R8W, NMPM	11. County and State San Juan, NM
12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT Type of Submission Notice of Intent Abandonment Change of Plans Proposition Change of Plans	X Other – Cathodic
Recompletion New Construction X Subsequent Report Plugging Non-Routine Fra Casing Repair Water Shut off	
Final Abandonment Altering Casing Conversion to In	jection
13. Describe Proposed or Completed Operations Attached is a drawing for the placement of the cathodic ground, rectifier and cable for the cathodic ground, rectifier and cable ground,	// MEG
14. I hereby certify that the foregoing is true and correct.	15 50 50 30 30 30 30 30 30 30 30 30 30 30 30 30
Signed Inut Thurs Denise Journey Title: Star	ff Regulatory Technician Date 9-6-1
(This space for Federal or State Office use) APPROVED BY	Date
CONDITION OF APPROVAL, if any: Title 18 U S C Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction	ACCEPTED FOR RECORD
•	SEP 0 8 2011
	FARMINGTON, FIELD OFFICE

R



Lively 25N

Section 29, T30N, R8W, N.M.P.M., San Juan County, NM

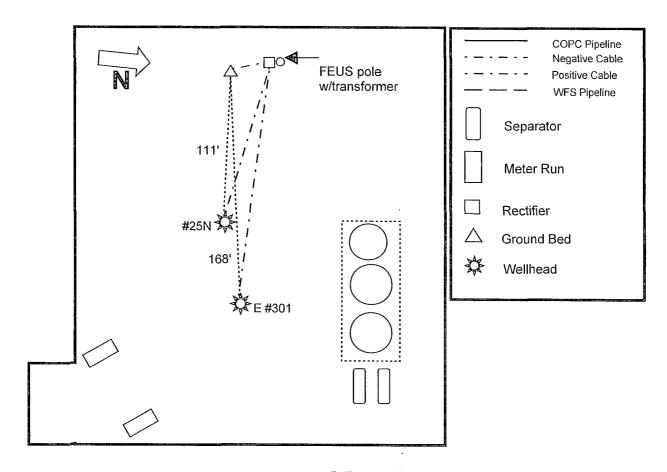

Drill ground bed approximately 111' west of #25N wellhead at staked location. Install 40-16 3 Negative rectifier on FEUS pole, and install cables to new ground bed and #25N and Howell E #301 wellheads at lengths below.

#25N Cables:

Negative: 132'

Positive: 20'

E #301 Cables:

Negative: 186'

Total Ditch: 152'

By: Steven Gillette Date: 1/25/10