District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

## State of New Mexico **Energy Minerals and Natural Resources**

For drilling and production facilities, submit to

Form C-144

June 1, 2004

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505 300 appropriate NMOCD District Office.

Kor downstream facilities, submit to Santa Fe .volfice


## Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes No X

Type of action: Registration of a pit or below-grade tank Closure of a pit of below-grade tank X e-mail address: \_\_vdonaghe@energen.com\_\_\_\_ Telephone: 505.325.6800 Operator: Energen Resources Corporation Address: 2198 Bloomfield Highway - Farmington, NM 87401 Facility or well name: \_Santa Rosa 29-9-17 #4\_\_\_\_\_ \_\_\_\_API #: \_30-045-31857\_\_\_\_\_U/L or Qtr/Qtr \_I\_\_\_\_\_ Sec \_\_17\_\_ T \_29N\_\_\_\_ R \_09W\_\_\_\_ Latitude 36.72305 Longitude 107.79555 NAD: 1927 X 1983 County: San Juan Surface Owner: Federal X State Private Indian Pit Below-grade tank Volume: bbl Type of fluid: Type: Drilling X Production Disposal D Construction material: Workover Emergency Double-walled, with leak detection? Yes I If not, explain why not. Lined X Unlined Liner type: Synthetic X Thickness 12 mil Clay Pit Volume 5000 bbl (20 points) Less than 50 feet Depth to ground water (vertical distance from bottom of pit to seasonal 50 feet or more, but less than 100 feet (10 points) high water elevation of ground water.) 100 feet or more ( 0 points) 0 Yes (20 points) Wellhead protection area: (Less than 200 feet from a private domestic 0 Nο ( 0 points) water source, or less than 1000 feet from all other water sources.) (20 points) Less than 200 feet Distance to surface water: (horizontal distance to all wetlands, playas, 200 feet or more, but less than 1000 feet (10 points) irrigation canals, ditches, and perennial and ephemeral watercourses.) ٥ 1000 feet or more ( 0 points) Ö Ranking Score (Total Points) If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if your are burying in place) onsite X offsite I If offsite, name of facility . (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No X Yes 🔲 If yes, show depth below ground surface \_\_\_\_\_\_ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations. Additional Comments: See cut & fill diagram in APD. Energen Resources built a lined pit according to "OCD Pit and Below-grade Tank Guidelines", as issued on November 1, 2004. Energen has closed this pit in accordance with BLM and "OCD Pit and Below-grade Tank Guidelines". I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines X , a general permit , or an (attached) alternative OCD-approved plan . Date: 03/15/05 Printed Name/Title \_\_Doug Thomas \_\_ Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or BEFUTY OIL & GAS INSPECTOR, DIST. AND Approval: Printed Name/Title

## PAD LAYOUT PLAN & PROFILE SG INTERESTS I LTD. Santa Rosa 17 #4 1925' F/SL 715' F/EL SEC. 17, T29N, R9W, N.M.P.M. SAN JUAN COUNTY, NEW MEXICO

Lat: 36°43'23" Long: 107°47'44"

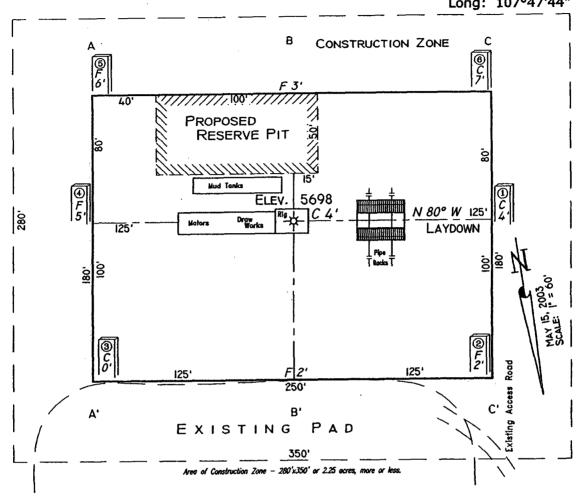

SCALE: I"=60'-HORIZ. I"=40'-VERT. A-A' 5700 5690 NOTE: Contractor should call One-Call for location 5680 of any marked or unmarked buried pipelines or cables on well pad and/or access road at least two (2) working days prior to construction. 5670 B-8' 5700 5690 5680 5670 be verified by Contractor. 5700 5690 5680

5670

Cuts and fills shown are approximate - final finished elevation is to be adjusted so earthwork will balance. Corner stakes are approximate and do not include additional areas needed for sidestones and derivous for sideslopes and drainages. Final Pad Dimensions are to

> VANN SURVEYS P. O. Box 1306 Farmington, NM