District I
1625 N French Dr., Hobbs, NM 88240
District II
814 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Sauta Fc., NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St Francis Dr Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator WILLIAMS FOUR CORNERS, LLC OGRID#.
Address 188 CR 4900 BLOOMFIELD, MM 87413
Facility or well name NEBU # 10.5
Facility or well name
U/L or Qtr/Qtr NE Section 24 Township 30N Range 8W County SAN JUAN
Center of Proposed Design Latitude Longitude NAD 1927 1983
Surface Owner 🗶 Federal 🗌 State 🔲 Private 🔲 Tribal Trust or Indian Allotment
Pit: Subsection F or G of 19 15 17 11 NMAC Temporary Drilling Workover Permanent Emergency Cavitation P&A Lined Unlined Uncircle HDPE HDPE PVC Other String-Reinforced Liner Seams Welded Factory Other Volume bbl Dimensions Closed-loop System: Subsection 10 i 19 15 17 11 NMAC Type of Operation P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type Thickness mil LLDPE HDPE PVC Other Liner Seams Welded Factory Other
Secondary containment with leak detection Visible sidewalls and liner Visible sidewalls and liner Visible sidewalls only Other
Alternative Method:
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

Fencing: Subsection D of 19 15 17 11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate Please specify	hospital,
Netting: Subsection E of 19.15-17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19 15 17 11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19 15 16 8 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s). Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s). Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19 15 17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptant are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approoffice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank - NM Office of the State Engineer - tWATERS database search. USGS, Data obtained from nearby wells	☐ Yes ☐ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) - Topographic map. Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	Yes No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application (Applies to permanent puts) - Visual inspection (certification) of the proposed site, Aerial photo, Satellite image	Yes No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application - NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978. Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality	☐ Yes ☐ No
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society, Topographic map	☐ Yes ☐ No
Within a 100-year floodplain - FEMA map	Yes No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15 17 13 NMAC Previously Approved Design (attach copy of design) API Number or Permit Number
Trottodasty ruptroved the sign (under copy of design) Part runnoer of Terrine runnoer
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18. if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC
and 19 15 17 13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number (.1 pplies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Dermanent Pits Permit Application Checklist: Subsection B of 19 15 17.9 NMAC
Proposed Closure: 19 15 17 13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems)
☐ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC Disposal Facility Name and Perinit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC

Waste Removal Clasure For Closed-loop Systems That Utilize Above Ground Ste	el Tanks or Haul-off Bins Only: (19 15 17.13 D	NMAC)
Instructions: Please indentify the facility or facilities for the disposal of liquids, dril facilities are required.	ling fluids and drill cuttings. Use attachment if m	iore than two
Disposal Facility Name Di	sposal Facility Permit Number	
Disposal Facility Name Di	sposal Facility Permit Number	
Will any of the proposed closed-loop system operations and associated activities occur Yes (If yes, please provide the information below) No	on or in areas that will not be used for future serve	ice and operations?
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate red Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	f 19.15 17 13 NMAC	:
Siting Criteria (regarding on-site closure methods only): 19 15 17 10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the cloprovided below. Requests regarding changes to certain siting criteria may require a considered an exception which must be submitted to the Santa Fe Environmental Budemonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for	dministrative approval from the appropriate distr ureau office for consideration of approval. Justif	ict office or may be
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS, Data of	otained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - ** NM Office of the State Engineer - iWATERS database search, USGS; Data of	otained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS, Data of	otained from nearby wells	☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significance (measured from the ordinary high-water mark) - Topographic map. Visual inspection (certification) of the proposed site	cant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in Visual inspection (certification) of the proposed site, Aerial photo, Satellite in		☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less th watering purposes, or within 1000 horizontal feet of any other fresh water well or spring - NM Office of the State Engineer - iWATERS database, Visual inspection (cer	ng, in existence at the time of initial application	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water valopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval	•	Yes No
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual in	aspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining ar	d Mineral Division	☐ Yes ☐ No
Within an unstable area - Engineering measures incorporated into the design, NM Bureau of Geology & Society, Topographic map	. Mineral Resources, USGS, NM Geological	☐ Yes ☐ No
Within a 100-year floodplain - FEMA map		☐ Yes ☐ No
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the formula by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate required.		an. Please indicate,
Proof of Surface Owner Notice - based upon the appropriate requirements of Su Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad Protocols and Procedures - based upon the appropriate requirements of 19.15 1 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Su Waste Material Sampling Plan - based upon the appropriate requirements of Su	absection F of 19 15 17.13 NMAC operate requirements of 19 15 17 11 NMAC observation of 19 15 17 11 NMAC of 19 13 NMAC of 13 NMAC of 19 15 17 13 NMAC of Subsection F of 19 15 17 13 NMAC	15.17.11 NMAC
☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of Re-vegetation Plan - based upon the appropriate requirements of Subsection I of Site Reclamation Plan - based upon the appropriate requirements of Subsection	l cuttings or in case on-site closure standards canno if 19 15 17 13 NMAC if 19 15 17 13 NMAC	ot be achieved)

19 Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and behef
Name (Print) Tıtle
Signature Date
e-mail address Telephone
OCD Approval: Permit Application (including closure plant) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 10/20/2011
Title: Compliance Office OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
Closure Completion Date: 7-27-11
22. Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain Excavation material Accases & LANDFARMED - RETURNED TO EXC.
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.
Disposal Facility Name Disposal Facility Permit Number
Disposal Facility Name Disposal Facility Permit Number
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique
24. <u>Closure Report Attachment Checklist</u> : Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check marky in the box, that the documents are attached.
 ✓ Proof of Closure Notice (surface owner and division) □ Proof of Deed Notice (required for on-site closure) □ Plot Plan (for on-site closures and temporary pits) ✓ Confirmation Sampling Analytical Results (if applicable) ☑ Waste Material Sampling Analytical Results (required for on-site closure) □ Disposal Facility Name and Permit Number ☑ Soil Backfilling and Cover Installation □ Re-vegetation Application Rates and Seeding Technique ☑ Site Reclamation (Photo Documentation)
On-site Closure Location Latitude Longitude NAD 1927 1983
Operator Closure Certification: Thereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print) MARK HARVEY, ON BEHALF OF WILLIAMS TITLE PROJECT COORD, NATOR
Signature Markhaditell.com Date: 8-25-11 c-mail address markhaditell.com Telephone 505-402-1958
c-mail address markhoditell.com Telephone 505-402-1958



Williams Four Corners, LLC

Closure Plan for Below Grade Tanks

San Juan Basin - New Mexico

Background

Following promulgation of 19.15.17 NMAC also known as the Pit Rule, Williams has developed this Closure Plan to comply with requirements related to the retirement of certain below grade tanks (BGTs). The plan will be used when closing BGT locations near term, and for all BGTs which are required to be closed by June 15, 2013. This plan shall also be used when closing any other BGT operated by Williams.

Certain below grade tanks targeted under this closure plan were, in some cases, installed subsequent to earthen pit closures and were constructed in conformance with NMOCD approved criteria. All BGTs have been operating in general compliance with NMOCD regulations developed prior to the new Pit Rule of June 2008.

Applicability

This plan shall be implemented when any BGT is retired or removed from service due to operational considerations or when tank integrity is compromised beyond repair. Closure shall commence within 60 days of cessation of use or sooner if directed by NMOCD.

The plan shall also be used if any leaking BGT is not retrofitted or modified to comply with applicable design criteria defined in the Pit Rule or when it is determined that continued operation of the BGT represents an imminent danger to fresh water, human health or the environment. All BGTs with or without completely visible sidewalls, and that do not meet current design standards, shall be closed prior to sale, transfer, or change of Operator or be retrofitted to meet current design standards. In any event, all single walled tanks without completely visible sidewalls shall be closed by June 15, 2013 in accordance with the provisions herein.

If there are conditions at a BGT location which prevent or limit adherence to this plan, a separate site specific plan will be developed. Such a plan will be prepared and submitted to the NMOCD for approval and serve as a new, site specific closure plan.

Description of Work

Prior to initiating BGT closure work, notification will be made to the NMOCD Aztec Office 3-7 days before work is scheduled. In addition, the landowner of record (obtained through county tax records) will be notified in advance by certified mail with return receipt. Notifications will provide operator identity, and legal location of the BGT, and the well name / number and API number if the BGT is associated with a well. Notification to NMOCD will be made via email or by phone. If prudent, and contingent upon work schedules and manpower assignments, more than one location may be included in a single communication.

Discharge to the BGT will be eliminated and all piping removed or re-routed as appropriate. The liquid contents in the tank will be removed and shipped for disposal at an NMOCD approved and permitted facility. Williams may utilize other facilities which may be approved by the NMOCD in the future. As such, the selected disposal site will be identified on the closure form (C-144) prepared for each discrete closure action.

The table below provides a list of waste materials and the facility proposed for disposal or recycling:

Table 1

Steel Tank	SJ County Landfill or Steel Recycling
Fiberglass Tank	SJ County or Bondad Landfill * or Re-use
Liner (cleaned - absent soil / sludge)	SJ County or Bondad Landfill
Sludge	Envirotech, IEI, TNT, or Bondad Landfill
Liquids (Water / Hydrocarbons)	Basin Disposal, Key Energy, TNT
Contaminated Soil	Envirotech, IEI, TNT, or Bondad Landfill
Fencing / Miscellaneous	Re-use or scrap

*the tank must be empty, cut up or shredded and EPA clean

Permit Numbers and additional approved facilities are listed on the attached spreadsheet.

The use of any disposal or recycling facility will be identified on the C-144 form submitted to the NMOCD as part of the closure report. Any and all ancillary equipment related to the tank will also be removed, including any synthetic liner material(s) and fencing. Williams will ensure that liners and liner material will be free of soil and sludge material and disposed of at a NMOCD approved solid waste facility (e.g. San Juan County Landfill or Permitted CO Facility).

Steel or fiberglass tanks will be removed and shipped to a Williams storage yard where the condition of each tank will be evaluated for recycling, reuse, or disposal, subject to NMOCD approval. If the tank is not in a condition allowing reuse, it will either be shipped to a permitted recycling facility (for steel tanks) or it will be disposed of at the San Juan County Landfill (NMED Permit SWM-052426) or other NMOCD approved solid waste disposal site. Specific waste acceptance conditions of the landfill could necessitate further actions as appropriate. Such actions include, but may not be limited to, cutting, shredding, or sizing; emptying or cleaning of tanks or liner material, and otherwise those necessary to conform with permit conditions for Subtitle D disposal and conditions identified in 19.15.35.8 NMAC.

After the tank and equipment have been removed, soils beneath the tank will be tested and evaluated to determine if there is hydrocarbon impact or otherwise if a release event has occurred. Specific sampling protocol will follow the description provided in the Pit Rule which calls for a five point composite sample (see Sampling and Lab Analyses section). Additional grab samples will be collected if there is obvious staining, or when wet or discolored soil exists, or if there is other evidence of soil impact(s). Samples will be shipped to an off-site environmental testing laboratory for proper analyses. Results will be submitted to the NMOCD on form C-141. Further sampling may be required if NMOCD determines additional assessment work is necessary.

If there has been no release to underlying soils as demonstrated by soil analyses (i.e. lab results), or if impacts are below closure limits provided in the table below, then the depression (i.e.excavation) will be backfilled with "non-waste containing" fill material. Depending on site conditions and operating needs, the backfilled area will be reclaimed with prescribed topsoil and reseeded.

If NMOCD or Williams determines a release event has occurred, Williams will comply with 19.15 29 and / or 19.15.30-as appropriate. If analyses of soils excavated in conjunction with the BGT removal should reveal contaminant concentrations at or below specified closure limits (see Table 2 below), then the soil may be returned to the excavation and covered with prescribed soil cover. Sampling of the excavated material is detailed in the Sampling and Laboratory Analyses section later in this plan.

Due to the fact that most of Williams BGTs are located on active well sites, reclamation efforts may be deferred in order to avoid impact to ongoing lease operations. In this event, the area of the retired BGT will be incorporated into the overall well site reclamation effort with Williams documenting surface owner and lease operator approval of the proposed alternative.

The BGT site will nevertheless be prepared to prevent erosion, and protect fresh water, human health, and the environment. Williams will submit this documentation to the NMOCD for approval.

Restoration efforts shall incorporate proper contouring as described in the Pit Rule and shall be constructed in a manner to prevent ponding and erosion, using drainage controls such as water bars and/or silt traps as appropriate. Soil cover (suitable for vegetative growth) will be equivalent to the background thickness of topsoil or minimum one foot depth (or background thickness whichever is greater). The area will be contoured in a manner blending soil into/with the surrounding grade. Reclamation shall target the location of the BGT along with associated access roads (not used for production operations) and be implemented to ensure a safe and stable condition that blends with the surrounding undisturbed area.

Re-vegetation efforts will conform with NMOCD approved methods and recommendations including seed type and application rates and shall effect cover equaling 70% of native perennial vegetation. Re-vegetation shall establish at least three native plant species, including at least one grass, but not including any noxious weeds, through two successive growing seasons. Seeding will be accomplished by drilling on the contour whenever practicable or by other NMOCD approved methods.

Seeding efforts will be initiated during the first growing season after closure work is approved and be repeated until re-vegetation is successful. Notification will be made to NMOCD anytime seeding efforts begin and when successful re-vegetation is sustained. Adverse growing conditions (e.g. drought, etc.) may cause delay until conditions are more favorable or necessitate enhanced cultivation techniques (e.g. mulching, irrigating, etc.) as approved by NMOCD.

Sampling and Laboratory Analyses

A minimum five point composite sample shall be collected from the soils beneath the below grade tank and one or more grab samples from each area that is wet, discolored or showing other evidence of a release. Sampled soil will be placed in clean glass jars and cooled and maintained at 39°F. Samples will be packaged and shipped under USEPA Chain-of-Custody protocol to an approved and certified environmental laboratory.

Soil samples collected from the earthen containment (i.e. BGT excavation) will be analyzed by an approved environmental laboratory by the listed test methods or as may be directed by the NMOCD. The following table lists the contaminants of concern, testing methods, and the closure limits defining action levels:

Table 2

Contaminant	Test Methods	Closure Limits (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	Method 418.1++	100
Chlorides	EPA SW-846 Method 300.1	250*

^{*} Or background concentration – whichever is greater

In the event soil is found to have contaminants in excess of the action levels above, requirements of 19 15 29 NMAC and 19 15 30 NMAC shall dictate further actions. Such action would likely include development of a Remedial Action Plan or Abatement Plan as specified under those Rules ++ Not currently used USEPA Method (Replaced by Method 1664). Method 418 1 is required by NMOCD

Sampling of any excavated or stockpiled material shall conform with standard environmental sampling protocol. Samples from excavated materials (excavated to facilitate the BGT removal) will be composite samples comprised of at least five discrete samples from the inside and on the surface of the soil pile. A minimum of one composite will be collected from each 25 cubic yards of soil (i.e. one fraction from each cubic yard). Every effort will be made to collect composite fractions from the inside and outside of the soil pile such that a "representative" sample is analyzed.

Stockpile sampling will be facilitated by utilizing a clean soil probe inserted into the soil pile at least three feet or by turning the soil pile with mechanized equipment to expose new soil. The goal is to collect a sample representative of the "whole". These samples will be handled and packaged as described above and be analyzed by the methods listed in Table 2. Soil with contaminant concentrations at or below the Closure Limits may be returned to the BGT excavation prior to initiating reclamation work.

Records and Documentation

All closure activities will be properly documented and include preparation of Form C-144 which shall be submitted to the NMOCD within 60 days of completing closure tasks. Information to be included in the closure report filing shall include, but not necessarily be limited to, the following:

- Proof of closure notice to division and surface owner(s)
- Confirmation sampling and analytical reports (results)
- Disposal facility name and permit information
- Description of capping and reclamation actions (i.e. revegetation rates)
- Photo documentation of site reclamation
- Other information required to complete applicable sections of C-144

As stated above, should conditions at any location necessitate a change to the approach described herein, separate site specific closure details will be provided as an addendum to this plan

emitrio		The second second	THE HOUSE OF THE STATE OF THE S	Legista III
19	GANDY MARLEY INC	10/06/1994 Chaves	GANDY MARLEY LANDFARM	-4-11 8-31 E
28	OLD LOCO OIL CO	07/02/1985 Eddy	OLD LOCO TREATING PLANT	-19-17 6-31 E
43	Loco Hills Landfarm LLC	11/08/2004 Eddy	Loco Hilla Landfarm	m-32-16 S-30 E
4	LOCO HILLS WATER DISPOSAL	10/30/1981 Eddy	LOCO HILLS WATER DISPOSAL	M-16-17 S-30 E
36	OK HOT OIL SERVICE INC	06/16/2000 Eddy	OK HOT OIL SERVICES INC	O-14-17 S-28 E
24	CHAPARRAL SWD	01/31/1996 Les	CHAPARRAL TREATING PLANT	B-17-23 S-37 E
35	LEA LAND INC	01/05/2000 Lea	LEA LAND LANDFILL	-32-20 S-32 E
12	C&C LANDFARM INC	11/16/1992 Lea	C&C LANDFARM	B-3-20 6-37 E
13	ENVIRONMENTAL PLUS INC	02/15/1993 Lea	ENVIRONMENTAL PLUS LANDFARM	-14-22 S-37 E
15	GOO YEA LANDFARM INC	11/16/1992 Lea	GOO YEA LANDFARM	-14-11 S-38 E
23	J&L LANDFARM INC	05/10/1998 Lea	J&L LANDFARM	-9-20 S-38 E
25	GANDY CORP	06/27/1973 Lea	Gandy Corp. Treating Plant	-11-10 S-35 E
26	JENEX OPERATING CO	09/21/1983 Lea	JENEX TREATING PLANT	D-14-20-5-38 E
30	ARTESIA AERATION LLC	06/29/1999 Lea	ARTESIA AERATION LANDFARM	-7-17 S-32 E
32	SOUTH MONUMENT SURFACE WASTE FACILITY LLC	10/04/1999 Lea	SOUTH MONUMENT LANDFARM	A-25-36 S-20 E
33	DOOM LANDFARM	04/03/2000 Lea	DOOM LANDFARM	g-5-25 S-37 E
34	DD LANDFARM INC	04/12/2000 Lea	DD LANDFARM	-31-21 S-38 E
21	RHINO OILFIELD DISPOSAL INC	11/17/1997 Lea	RHINO OILFIELD LANDFARM	-34-20 S-38 E
44	COMMERCIAL EXCHANGE, INC.	11/01/2004 Lea	Blackwater Oil Reclamation Facility	d-1-25 S-37 E
39	PITCHFORK LANDFARM LLC	10/30/2002 Lea	PITCHFORK LANDFARM	A-5-24 S-34 E
8	CONTROLLED RECOVERY INC	04/27/1990 Lea	CONTROLLED RECOVERY	-27-20 S-32 E
42	COMMERCIAL EXCHANGE, INC.	07/22/2004 Lea	Blackwater Landfarm	f-1-25 S-37 E
38	SAUNDERS LANDFARM LLC	10/28/2002 Lea	SAUNDERS LANDFARM	M-7-14 8-34 E
41	LAZY ACE LANDFARM LLC	03/09/2004 Lea	LAZY ACE LANDFARM	M-22-20 S-34 E
3	SUNDANCE SERVICES, INC.	08/30/1977 Lea	SUNDANCE PARABO	m-29-21 S-38 E
37	COMMERCIAL EXCHANGE, INC.	03/31/2003 Lea	COMMERCIAL SURFACE WM FACILITY	A-1-20 S-38 E
8	T-N-T ENVIRONMENTAL INC	01/19/1987 Rio Amba	TNT EVAP POND/LANDFARM	-8-25 N-3 W
11	ENVIROTECH INC	07/07/1982 San Juan	ENVIROTECH LANDFARM #2	-8-28 N-10 W
9	KEY FOUR CORNERS INC	04/02/1991 San Juan	KEY EVAP POND and Landfarm	E-2-29 N-12 W
10	JFJ LANDFARM LLC	07/22/2002 San Juan	JFJ Land Farm Crouch Mesa (Formerly Tierra)	J-2-29 N-12 W
6	BASIN DISPOSAL INC	10/16/1987 San Juan	BASIN DISPOSAL EVAP, POND	F-3-29 N-11 W

.

.

.

.



July 21, 2011

Mr Mark Kelly **USBLM** - Farmington District 1235 La Plata Highway, Suite A Farmington, NM 8701

NOTICE OF BELOW GRADE TANK CLOSURES RE:

Dear Mr Kelly:

Pursuant to the requirements of the New Mexico Oil Conservation Division (OCD), Williams hereby provides notice of the intent to retire and close the below grade tank (BGT) at the following locations:

NEBU #105

NE/4 Sec 24 T30N R8W

API # 3004520148

HJ Loe FED B #2E

NW/4 Sec 23 T29N R12W API # 3004524554

The below grade tank at each location had been used to capture liquids from dehydrator discharge(s).

The tanks are now out of service and will be closed consistent with the Williams Closure Plan for Below Grade Tanks approved by the OCD. A copy of the plan was previously provided to your office. Field work is scheduled to commence the week of July 25th.

If you have any questions regarding the nature and extent of work, or the exact field schedule, please call Danell Zawaski at (505) 632-4708 or I may be reached at 505-402-1958.

Respectfully,

Mark Harvey

Project Coordinator

1 DO HEREBY CERTIFY that this document was sent by CERTIFIED MAIL to the named recipient at the address above on 7-21-11.



July 21, 2011

Mr. Bradon Powell NMOCD 1000 Rio Brazos Road Aztec, NM 87410

RE: NOTICE OF BELOW GRADE TANK CLOSURES

Dear Mr. Powell.

Pursuant to the requirements of the New Mexico Oil Conservation Division (OCD). Williams hereby provides notice of the intent to retire and close the below grade tank (BGT) at the following locations:

NEBU #105

NE/4 Sec 24 T30N R8W

API# 3004520148

HJ Loe FED B #2E

NW/4 Sec 23 T29N R12W

API # 3004524554

The below grade tank at each location had been used to capture liquids from dehydrator discharge(s)

The tanks are now out of service and will be closed consistent with the Williams Closure Plan for Below Grade Tanks approved by the OCD. A copy of the plan was previously provided to your office. Field work is scheduled to commence the week of July 25th.

If you have any questions regarding the nature and extent of work, or the exact field schedule, please call Danell Zawaski at (505) 632-4708 or I may be reached at 505-402-1958.

Respectfully,

Mark Harvey

Project Coordinator

1 DO HEREBY CERTIFY that this document was sent by FACSIMILE TRANSMISSION to the named recipient at 505-334-6170 on July 22nd.



ANALYTICAL RESULTS

Project:

WFC-BGTS HJ LODNEBU 105

Pace Project No.:

Sample: 141926JUL11

60103793

Lab ID: 60103793003

Collected: 07/26/11 14:19 Received: 08/05/11 09:30

Matrix: Solid

Results reported on a "dry-weight" basis

Parameters	Results	Units	Report Limit	DF	Prepared	Analyzed	CAS No.	Qual
8260 MSV 5035A VOA	Analytical Meth	od: EPA 8260						
Benzene	ND uĝ/	kġ	5.8	1		08/09/11 11:59	71-43-2	
Ethylbenzene	ND ug/	kg	5.8	1		08/09/11 11:59	100-41-4	
Toluene	ND ug/	kg	5.8	1		08/09/11 11:59	108-88-3	
Xylene (Total)	ND ug/	kg	5.8	1		08/09/11 11:59	1330-20-7	
Dibromofluoromethane (S)	106 %		68-129	1		08/09/11 11:59	1868-53-7	
Toluene-d8 (S)	101 %		81-121	1		08/09/11 11:59	2037-26-5	
4-Bromofluorobenzene (S)	101 %	•	75-131	1		08/09/11 11:59	460-00-4	
1,2-Dichloroethane-d4 (S)	114 %		77-131	1		08/09/11 11:59	17060-07-0	
Percent Moisture	Analytical Meth	od: ASTM D29	74-87			,		
Percent Moisture	13.7 %		0.50	1		08/09/11 00:00		
9071 HEM TPH in Soil	Analytical Meth	od: EPA 9071B	Preparation Me	thod: E	EPA 9071B	•	•	
Total Petroleum Hydrocarbons	ND mg	/kg	289	1	08/12/11 00:00	08/12/11 00:00		•
300.0 IC Anions 28 Days	Analytical Meth	od: EPA 300.0						
Chloride	ND mg	/kĝ	116	10		08/11/11 02:22	16887-00-6	



ANALYTICAL RESULTS

Project

WFC-BGTS HJ LOT/NEBU 105


Pace Project No

60103793

Sample: 142526JUL11 Lab ID: 60103793004	Collected	07/26/11 14 25	Received	08/05/11 09 30	Matrıx	Solid
---	-----------	----------------	----------	----------------	--------	-------

Results reported on a "dry-weight" basis

Parameters	Results -	Units	Report Limit	DF_	Prepared	Analyzed	CAS No	Qual
8260 MSV 5035A VOA	Analytical Meti	nod. EPA 8260	ס					
Benzene	ND ug	ı/kg	5 7	1		08/09/11 12 13	71-43-2	
Ethylbenzene	ND ug	ı/kg	5 7	1		08/09/11 12 13	100-41-4	
Toluene	ND ug	ı/kg	5 7	1		08/09/11 12 13	108-88-3	
Xylene (Total)	ND ug	ı/kg	5 7	1		08/09/11 12 13	1330-20-7	
Dibromofluoromethane (S)	103 %		68-129	1		08/09/11 12 13	1868-53-7	
Toluene-d8 (S)	100 %		81-121	1		08/09/11 12:13	2037-26-5	
4-Bromofluorobenzene (S)	100 %		75-131	1		08/09/11 12 13	460-00-4	
1,2-Dichloroethane-d4 (S)	121 %		77-131	1		08/09/11 12.13	17060-07-0	
Percent Moisture	Analytical Met	nod ASTM D	2974-87					
Percent Moisture	13.1 %		0 50	1		08/09/11 00 00	y.	
9071 HEM TPH in Soil	Analytical Met	hod EPA 907	1B Preparation Me	thod E	EPA 9071B			
Total Petroleum Hydrocarbons	298 m	g/kg	287	1	08/12/11 00 00	08/12/11 00:00		

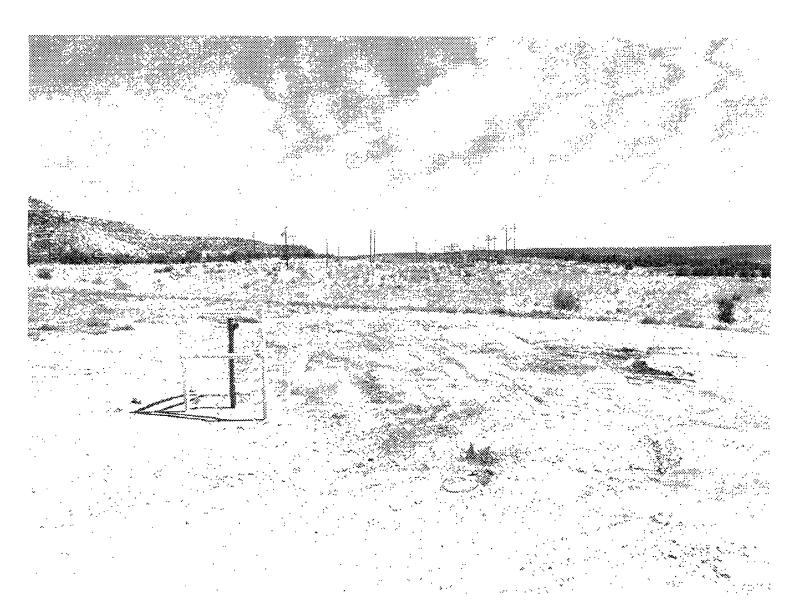

NEBU # 105

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rto Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19 15 29 NMAC.

Delega Natification and Connecting Action							
Release Notification and Corrective Action							
	OPERATOR			al Report	V F	inal Repor	
Name of Company WILLIAMS FOUR CORNERS, LIC	Contact DA	JASKI					
Address 188 CR 4900 BLOOMFIELD, NM Facility Name NEBU # 105	Telephone No SOS-634-495 Facility Type WELL						
Surface Owner BLM Mineral Owner	er	3004520148					
LOCATION OF RELEASE							
Unit Letter Section Township Range Feet from the No	rth/South Line F	h/South Line Feet from the		ast/West Line County			
NE/4 24 30N 8W				SAN JUAN			
Latitude	Longitude_						
NATURE OF RELEASE							
Type of Release DENY DISCHARGE		Volume of Release UNIX < 1 BOL Volume			e Recovered None		
Was Immediate Nance Given?	If YES TO W	Date and Hour of Occurrence If YES, To Whom?			Date and Hour of Discovery 10 20 20 20 20 20 20 20 20 20 20 20 20 20		
Yes No Not Requir	red 1125, 10 W		and Hour of Discovery 10 20 27 22				
By Whom?	Date and Hour If YES, Volume Impacting the Watercourse			/ <u>m</u>	MEC	E' 11	
Was a Watercourse Reached? ☐ Yes ☑ No	If YES, Volu	me Impacting t	he Watercourse	172	DET	2000	
If a Watercourse was Impacted, Describe Fully *				12 4	E GUIVS I)// Dia	
Describe Cause of Problem and Remedial Action Taken.* DEHY LIQUISS (WATER + CONDENSATE)	OUTSING BGT	- DEI CASI	- ATOLBUTA	ALE TO	15348	120° 9 NV. DIST. 3	
INTO SECONDARY CONTAINMENT OR W			, 1/1/100.11	0-0 10	Over		
Describe Area Affected and Cleanup Action Taken *							
AREA AROUND - BENEATH BGT - EXCAVATE CONTAMINATED SOIL - LANDFARM							
I hereby certify that the information given above is true and complete regulations all operators are required to report and/or file certain release public health or the environment. The acceptance of a C-141 report by should their operations have failed to adequately investigate and remed or the environment. In addition, NMOCD acceptance of a C-141 reported and, state, or local laws and/or regulations.	se notifications and the NMOCD mark diate contamination	perform correct ked as "Final R that pose a thr the operator of	tive actions for rel eport" does not rel eat to ground wate responsibility for c	eases which ieve the ope r, surface wa ompliance v	may end rator of li ater, huma with any o	anger iability an health	
1	OIL CONSERVATION DIVISION						
Signature Milliams For WILLIAMS							
Printed Name MARK HARVEY	Approved by Er						
Title PROJECT COORDINATION	Approval Date	Approval Date Expiration		Date			
E-mail Address. markheditell.com	Conditions of Approval			Attached			
Date: 47 7 - 20 - 11 Phone 505 - 402 - 1958 * Attach Additional Sheets If Necessary							



Williams Four Corners, LLC Below Grade Tank Closure Report

Well Name <u>NEBU # 105</u> API Number <u>3004520148</u>

The following provides information related to the retirement and closure of the below grade tank (BGT) at the named location All work was performed in accordance with Rule 19.15.17.13 NMAC and was consistent with the Williams BGT Closure Plan approved by NMOCD.

Requirement. Provide notices to NMOCD and landowner prior to closure actions.

<u>Action</u>: Notification made to the landowner by mail and to the NMOCD Aztec District Office by either mail (included with C-144) or by email.

Requirement Eliminate discharge to the BGT and remove free standing liquids from BGT and or containment

Action: Discharge to the BGT was eliminated and liquids when present were removed by a licensed hauler and taken to a NMOCD permitted facility listed in the aforementioned closure plan.

Requirement: Remove ancillary equipment including piping, liner material, and fencing.

Action Piping. liner material, and fencing was removed in advance or at the time of BGT retirement work. Scrap steel was recycled or placed in a Williams owned storage area to allow evaluation for final disposition.

Requirement Sample and test soils beneath the BGT to determine if there was hydrocarbon impact.

Action: Soils were sampled and analyzed for TPH, BTEX, and total chlorides. Results are attached to the C-144 Closure Form and are part of the closure documentation.

Requirement. Address contamination consistent with the Closure Plan or Remedial Action Plan / Protocol

Action. Contaminated soil was either hauled to a NMOCD approved land farm (identified in the approved BGT Closure Plan) or it was land farmed and or mixed with clean soil to meet acceptable action levels for contaminants of concern (COC).

Requirement: Backfill containment / excavation with acceptably clean materials and return area to grade such that ponding and erosion are mitigated.

Action: Clean soil (as defined) was used to return the BGT area to grade and was contoured / leveled consistent with the Pit Rule criteria.

Requirement Reclaim and re-seed the area consistent with the Pit Rule and Closure Plan criteria.

<u>Action:</u> This requirement was not completed as the BGT was located on an active well pad. As stated in the approved plan, this requirement is deferred pending further well production and / or subsequent actions of the leaseholder and will be addressed when the well site is reclaimed.

Any additional work performed and not described herein was completed consistent with the BGT Closure Plan and for applicable NMOCD requirements. Further information is provided in the C-144 Closure Form as specified in the Pit Rule.