District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
June 1, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☒ No ☐
Type of action: Registration of a pit or below-grade tank ☐ Closure of a pit or below-grade tank ☒

Operator: Burlington Resources Telephone: (505) 326-9841 e-mail address: LHasely@br-inc.com
Address: 3401 East 30th Street, Farmington, New Mexico, 87402
Facility or well name: Howell No. 800 API #: 30045272420000 U/L or Qtr/Qtr G Sec 26 T 28N R 8W
County: San Juan Latitude 36.63579 Longitude -107.6468 NAD: 1927 ☒ 1983 ☐
Surface Owner: Federal ☐ State ☐ Private ☒ Indian ☐

Pit	**Below-grade tank**		
Type: Drilling ☐ Production ☐ Disposal ☐ Workover ☐ Emergency ☐ Lined ☐ Unlined ☐ Liner type: Synthetic ☐ Thickness ____mil Clay ☐ Pit Volume ____bbl	Volume: 40 bbl Type of fluid: Produced Water and Incidental Oil Construction material: Fiberglass Double-walled, with leak detection? Yes ☐ If not, explain why not. No. Tank in place prior to Rule 50.		
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet 50 feet or more, but less than 100 feet 100 feet or more	(20 points) (10 points) (0 points)	10
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes No	(20 points) (0 points)	0
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet 200 feet or more, but less than 1000 feet 1000 feet or more	(20 points) (10 points) (0 points)	10
	Ranking Score (Total Points)		20

If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if your are burying in place) onsite ☐ offsite ☐ If offsite, name of facility * . (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☐ Yes ☐ If yes, show depth below ground surface_____ft. and attach sample results.
(5) Attach soil sample results and a diagram of sample locations and excavations.

Additional Comments:
* The soils tested clean and no soil remediation was required.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. **I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an (attached) alternative OCD-approved plan ☐.**

Date: 4/12/05
Printed Name/Title Ed Hasely, Env. Advisor Signature Ed Hasely

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval:
Printed Name/Title ~~Mr. Ed Hasely, Environmental Advisor~~ Signature DEPUTY OIL & GAS INSPECTOR, DIST. Date: APR 14 2005

CLIENT: Burlington Resources

ENVIROTECH INC

ENVIRONMENTAL SCIENTISTS & ENGINEERS
5796 U.S. HIGHWAY 64-3014
FARMINGTON, NEW MEXICO 87401
PHONE (505) 632-0615

FIELD REPORT CLOSURE VERIFICATION

LOCATION: NAME: Howell 800 WELL #: PIT:
QUAD/UNIT: G SEC: 26 TWP: 28 N RNG: 008 W PM: NMPM CNTY: SJ ST: NM
QTR/FOOTAGE: CONTRACTOR:
DATE STARTED: 3/30/05
DATE FINISHED: 3/30/05
ENVIRONMENTAL SPECIALIST: D. Young

EXCAVATION APPROX: 10 FT x 14 FT x 9 FT DEEP CUBIC YARDAGE: 0

DISPOSAL FACILITY: ——— REMEDIATION METHOD:
LAND USE: LEASE: FORMATION:

FIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 62 FT 75° FROM WELLHEAD.
DEPTH TO GROUNDWATER: < 100ft NEAREST WATER SOURCE: — NEAREST SURFACE WATER: 1000 ft
NMOCD RANKING SCORE: 20 NMOCD TPH CLOSURE STD: 100 PPM

CHECK ONE:
___ PIT ABANDONED
___ STEEL TANK INSTALLED

SOIL AND EXCAVATION DESCRIPTION:

Soil underneath appeared very clean. Pit full of gray clay. Gray clay clean. Well head 1 meter from road and unprotected

No soil remediation was required.

FIELD 418.1 CALCULATIONS

TIME	SAMPLE I.D.	LAB No:	WEIGHT (g)	mL FREON	DILUTION	READING	CALC. ppm
12:45	5 pt comp	1	5.0	20	1	4	16 ppm

SCALE
0 FT

PIT PERIMETER

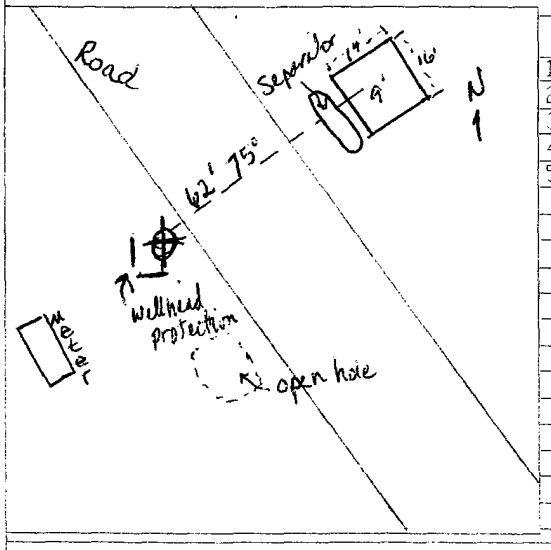

OVM RESULTS

SAMPLE ID	FIELD HEADSPACE PID (ppm)
1 5 pt comp	2
2	
3	
4	
5	

LAB SAMPLES

SAMPLE ID	ANALYSIS	TIME

PIT PROFILE



X 5 pt comp samples

TRAVEL NOTES CALLOUT: ONSITE:

ENVIROTECH INC.

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

EPA METHOD 418.1
TOTAL PETROLEUM HYDROCARBONS

Client:	Burlington Resources	Project #:	92115-021-046
Sample No.:	1	Date Reported:	4/6/2005
Sample ID:	Five Point Composite	Date Sampled:	3/30/2005
Sample Matrix:	Soil	Date Analyzed:	3/30/2005
Preservative:	Cool	Analysis Needed:	TPH-418.1
Condition:	Cool and Intact		

Parameter	Concentration (mg/kg)	Det. Limit (mg/kg)
Total Petroleum Hydrocarbons	**16.0**	**5.0**

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis and Waste, USEPA Storet No. 4551, 1978.

Comments: **Howell No. 800**

Instrument callibrated to 200 ppm standard. Zeroed before each sample

D. Young
Analyst

Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505 • 632 • 0615 • Fax 505 • 632 • 1865

ENVIROTECH INC.

PRACTICAL SOLUTIONS FOR A BETTER TOMORROW

CONTINUOUS CALIBRATION
EPA METHOD 418.1
TOTAL PETROLEUM
HYDROCARBONS

Cal. Date: 3/30/2005

Parameter	Standard Concentration mg/L	Concentration Reading mg/L
TPH	100	-
	200	204
	500	-
	1000	-

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

D. Young
Analyst

4/7/05
Date

Audrey Rosenthal-Parker
Review

4/7/05
Date

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505 • 632 • 0615 • Fax 505 • 632 • 1865