District 1 1625 N. French Dr , Hobbs, NM 88240 District II District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

### State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

	Pit, Closed-Loop System, Below-Grade Tank, or
Propo	sed Alternative Method Permit or Closure Plan Application
of action:	Domnit of a mit alocad loan system helesy and stark' as managed alternative

Type of action:   Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method   Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method   Closure plan only submitted for an existing permit   Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method   Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request   Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the moritorionment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.   Operator: McElvain Oil & Gas Properties, Inc.   OGRID #: 22044   Address:   1050 17th Street, Suite 1800.   Denver, CO 80265   Denver, CO 80265   Denver, CO 80265   Denver, Suite 1800.   Denver, CO 80265   Denver, CO 8026	Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method  Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.  1. Operator:	☐ Modification to an existing permit ☐ Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
Derator: McElvain Oil & Gas Properties, Inc	Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Address:1050 17th Street, Suite 1800 Denver, CO_80265	Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Facility or well name: _SALMON #1R	
API Number:	Address:1050 17 <sup>th</sup> Street, Suite 1800, Denver, CO 80265
U/L or Qtr/Qtr _B Section _ 30 Township _ 29N Range _ 11W County: San Juan	Facility or well name: _SALMON #1R
Center of Proposed Design: Latitude36 42.130N Longitude108 01.787W NAD: \[ Design	API Number:30-045-34153 OCD Permit Number:
Surface Owner:   Federal   State   Private   Tribal Trust or Indian Allotment  2.	U/L or Qtr/QtrBSection30Township29NRange11WCounty:San Juan
Pit: Subsection F or G of 19.15.17.11 NMAC     Temporary:   Drilling   Workover     Permanent   Emergency   Cavitation   P&A     Lined   Unlined Liner type: Thickness   mil   LLDPE   HDPE   PVC   Other     String-Reinforced     Liner Seams:   Welded   Factory   Other   Volume:   bbl Dimensions: L   x W   x D     3.   Closed-loop System: Subsection H of 19.15.17.11 NMAC     Type of Operation:   P&A   Drilling a new well   Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)     Drying Pad   Above Ground Steel Tanks   Haul-off Bins   Other     Lined   Unlined Liner type: Thickness   mil   LLDPE   HDPE   PVC   Other     Liner Seams:   Welded   Factory   Other   Thickness   Maul-off Bins   Other     Liner Seams:   Welded   Factory   Other   Thickness   Maul-off Bins   Other   Thickness   Thickness   Maul-off Bins   Other   Thickness   Thicknes	Center of Proposed Design: Latitude36 42.130N Longitude108 01.787W NAD: ☑1927 ☐ 1983
Temporary: Drilling Workover    Permanent   Emergency   Cavitation   P&A     Lined   Unlined Liner type: Thickness   mil   LLDPE   HDPE   PVC   Other     String-Reinforced   Liner Seams: Welded   Factory   Other   Volume: bbl Dimensions: L   x W   x D     3.   Closed-loop System: Subsection H of 19.15.17.11 NMAC     Type of Operation: P&A   Drilling a new well   Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)     Drying Pad   Above Ground Steel Tanks   Haul-off Bins   Other     Lined   Unlined Liner type: Thickness   mil   LLDPE   HDPE   PVC   Other     Liner Seams: Welded   Factory   Other     SEP 2008   Selow-grade tank: Subsection 1 of 19.15.17.11 NMAC	Surface Owner:   Federal   State   Private   Tribal Trust or Indian Allotment
Closed-loop System: Subsection H of 19.15.17.11 NMAC  Type of Operation: □ P&A □ Drilling a new well □ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) □ Drying Pad □ Above Ground Steel Tanks □ Haul-off Bins □ Other □ Lined □ Unlined Liner type: Thickness □ mil □ LLDPE □ HDPE □ PVC □ Other Liner Seams: □ Welded □ Factory □ Other □ RECEIVED  4. □ Below-grade tank: Subsection I of 19.15.17.11 NMAC    Seams	Temporary: Drilling Workover  Permanent Emergency Cavitation P&A  Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other  String-Reinforced  Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
intent)  Drying Pad	
4.    Below-grade tank: Subsection 1 of 19.15.17.11 NMAC   SEP 2008   Sep 200	Closed toop System. Subsection 11 of 17.15.17.11 MARC
4.    Below-grade tank: Subsection 1 of 19.15.17.11 NMAC   SEP 2008   Sep 200	Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
4.    Below-grade tank: Subsection 1 of 19.15.17.11 NMAC   SEP 2008   Sep 200	Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
Subsection 1 of 13:13:17:11 NMAC	Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)  Drying Pad Above Ground Steel Tanks Haul-off Bins Other  Lined Unlined Liner type: Thickness
Secondary containment with leak detection  Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)  Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other  Liner Seams: Welded Factory Other

Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

\_mil 🔲 HDPE 🗌 PVC 🔲 Other \_

Page 1 of 5

Liner type: Thickness

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify.	hospital.
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting OtherExpanded Metal  Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC  ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  ☐ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes 🖾 No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☑ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	☐ Yes ☐ No ☑ NA
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li> <li>NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site</li> </ul>	☐ Yes ☑ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☑ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No
<ul> <li>Within an unstable area.</li> <li>Engineering measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>	☐ Yes 🖾 No
Within a 100-year floodplain FEMA map	☐ Yes ☑ No

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached.  Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
<ul> <li>☑ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC</li> <li>☑ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC</li> <li>and 19.15.17.13 NMAC</li> </ul>
Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC
and 19.15.17.13 NMAC  Previously Approved Design (attach copy of design)  API Number:
☐ Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H <sub>2</sub> S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Saste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.    Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC   Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC   Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)   Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC   Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if medical transfer of the disposal of the	NMAC) nore than two
facilities are required.  Disposal Facility Name: Disposal Facility Permit Number:	
·	
•	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future serv Yes (If yes, please provide the information below) No	ice and operations?
Required for impacted areas which will not be used for future service and operations:  Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	
17.  Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC  Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate districtions of exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justif demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	ict office or may be
Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	15.17.11 NMAC

Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Deborah K Powell Title: _Engineering Tech Supervisor
1 11 × n/4 9-8-08
Signature: Date: 7 8 00
e-mail address:DebbyP@McElvain.com
20.  OCD Approval:  Permit Application (including closure plan)  Closure Plan (only)  OCD Conditions (see attachment)
OCD Representative Signature: Approval Date: Approval Date: Approval Date: Approval Date:
Deputy Oil & Gas Inspector.
Title: OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC  Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
Closure Completion Date:
22.  Closure Method:  Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only)  If different from approved plan, please explain.
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:
Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than
two facilities were utilized.  Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?  Yes (If yes, please demonstrate compliance to the items below) No
Required for impacted areas which will not be used for future service and operations:  Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique
Closure Report Attachment Checklist: _Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.    Proof of Closure Notice (surface owner and division)   Proof of Deed Notice (required for on-site closure)   Plot Plan (for on-site closures and temporary pits)   Confirmation Sampling Analytical Results (if applicable)   Waste Material Sampling Analytical Results (required for on-site closure)   Disposal Facility Name and Permit Number   Soil Backfilling and Cover Installation   Re-vegetation Application Rates and Seeding Technique   Site Reclamation (Photo Documentation)   On-site Closure Location: Latitude Longitude NAD:   1927   1983
25. Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): Title:
Signature: Date:
e-mail address: Telephone:

Form C-144

<u>DISTRICT 1</u> 1825 N. French Dr., Hobbs, N.M. 88240 State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

DISTRICT B 1301 W. Grand Avenue, Artesia, N.M. 88210

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT III 1000 Rio Brazos Rd., Astec, N.M. 87410 OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

AMENDED REPORT

DISTRICT IV 1220 S. St. Francis Dr., Santa Pe, NM 87505

### WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number 30 - 045- 34	Paol Code 77200	FULCHER KUTZ/PICTURED C	LIIFS
'Property Code	298	Property Name SALMON	* Well Number 1R
70GRID No. 22044	McELVAIN OIL	Operator Name AND GAS PROPERTIES, INC.	"Rievation 5473"


<sup>10</sup> Surface Location

UL or lot no.	Section 30	Township 29N	Range 1 1 W	Lot Idn	Feet from the 730'	North/South line NORTH	Feet from the 1705'	Best/West line EAST	County SAN JUAN
					<u> </u>	L			L

11 Bottom Hole Location If Different From Surface

								200000				
Ū	L or	lot	20.	Section	Township	Range	Lot Idn	Peet from the	North/South line	Feet from the	Rest/West line	County
											RCVD FEB7	
15	Dedic	ated	Acre	9		19 Joint or	lofill	16 Consolidation (	Code	<sup>15</sup> Order No.	BHSFONS.	DIV.
		16	0.16	- (NE/	(4)							

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

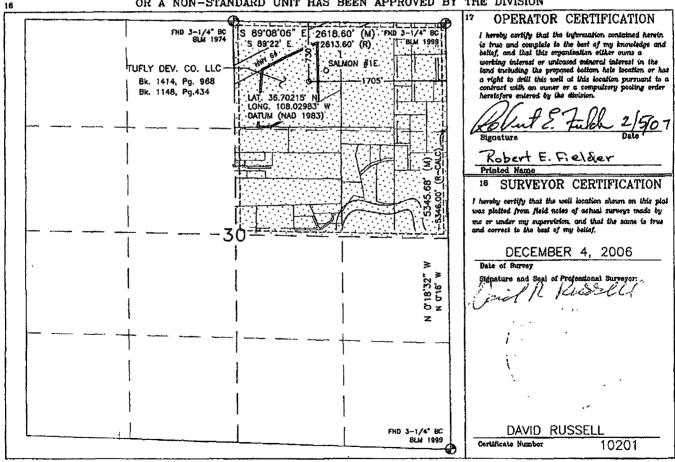

### New Mexico Office of the State Engineer POD Reports and Downloads

Towns	hip: 30N	Range: 13W	Sections: 1	9,20,29,30	),31,32	·	
NAD27	X:	Y:	Zone:	745 Baus	Search Radius	: <u>,                                     </u>	
County:	Basi	n: SJ( San Juan)	į	Numl	per:	Suffix:	**
Owner Name: (First)	)	(Last)		@1	Non-Domestic	O Domestic	@ All
POD //Surface	Data Repor	t Avg	Depth to Wat	ter Report	Wate	r Column Repor	<b>L</b>
		Clear Form	iWATERS!	Menueऔ	Help'		

### WATER COLUMN REPORT 08/25/2008

44

40

25

18

10

10

26

30

15

	(quarter	s are 1=	NW 2=NE	3=SW 4=S	E)				
	(quarter	s are bi	ggest to	smalles	t)		Depth	Depth	Water (in
POD Number	Tws	Rng Sec	gqq	Zone	x	Y	Well	Water	Column
SJ 00868	30N	13W 29	2				49	25	24
SJ 00262	30N	13W 29	2				38	25	13
SJ 01357	30N	13W 29	2 2				71	56	15
SJ 01040	30N	13W 29	2 2				49	20	29
SJ 03046	30N	13W 29	2 2 4				80	30	50
SJ 00448	30N	13W 29	4				45	20	25
SJ 01502	30N	13W 29	4				47	20	27
SJ 02159	30N	13W 29	4 3				40	15	25
SJ 00215	30N	13W 29	4 3				55	35	20
SJ 02754	30N	13W 29	4 4 4				65	65	
SJ 00467	30N	13W 30	4 4				36	21	15
SJ 01150	30N	13W 32	1 4				37	16	21

Record Count: 15

30N

30N

30N

13W 32

13W 32

13W 32 3 1

3

SJ 00156

SJ 00217

SJ 01359

### New Mexico Office of the State Engineer POD Reports and Downloads

Township: 30N Range: 14W Sections: 24,25,36 NAD27 X: Y: Zone: Search Radius: Basin: SJ(San Juan) 957 County: Suffix: Number: Owner Name: (First) Non-Domestic Domestic All (Last) POD // Surface Data Report Avg Depth to Water Report Water Column Report Clear Form iWATERS Menu Help

#### WATER COLUMN REPORT 08/25/2008


(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are biggest to smallest)
POD Number Tws Rng Sec q q q Zone X


Depth Depth Water (in Well Water Column

No Records found, try again


### San Juan Mines, Mills And Quarries Web Map

Mines, Mil	ls & Quarries Commodity Groups
Δ	Aggregate & Stone Mines
•	Coal Mines
☆	Industrial Minerals Mines
•	Industrial Minerals Mills
Ø	Metal Mines and Mill Concentrate
	Potash Mines & Refineries
	Smelters & Refinery Ops.
<b>*</b>	Uranium Minas

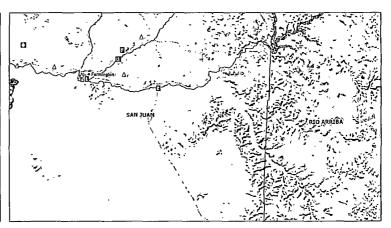






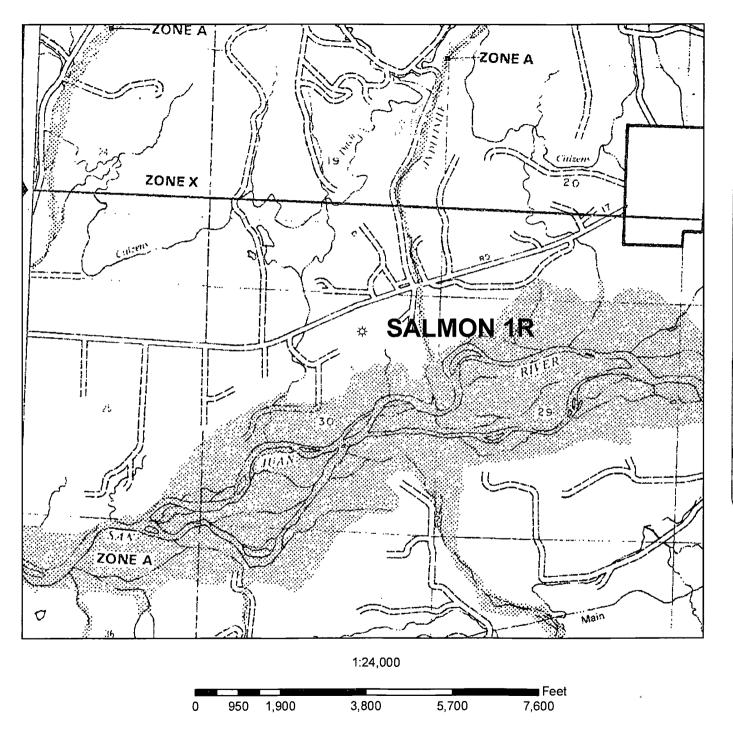

NATIONAL FLOOD INSURANCE PROGRAM FIRM FLOOD INSURANCE RATE MAP SAN JUAN COUNTY, NEW MEXICO UNINCORPORATED AREAS PANEL 550 OF 1450 (SEE MAP INDEX FOR PANELS NOT PRINTED) PANEL LOCATION COMMUNITY-PANEL NUMBER 350064 0550 B EFFECTIVE DATE: AUGUST 4, 1988 Federal Emergency Management Agency

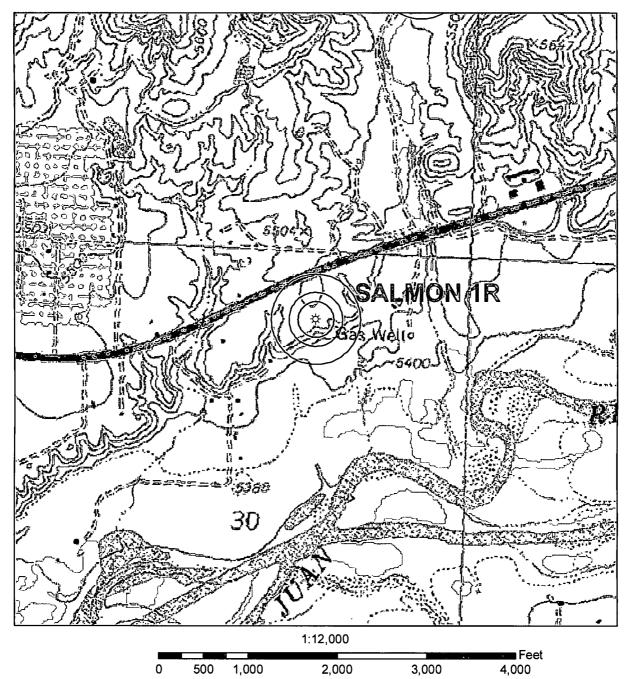


### Legend

McElvain Well & 200' Radius

McElvain Well & 300' Radius

McElvain Well & 500' Radius


Source: USGS 1:24,000 Scale Topographic Map Series San Juan Basin New Mexico Township 29N 11W Section 30

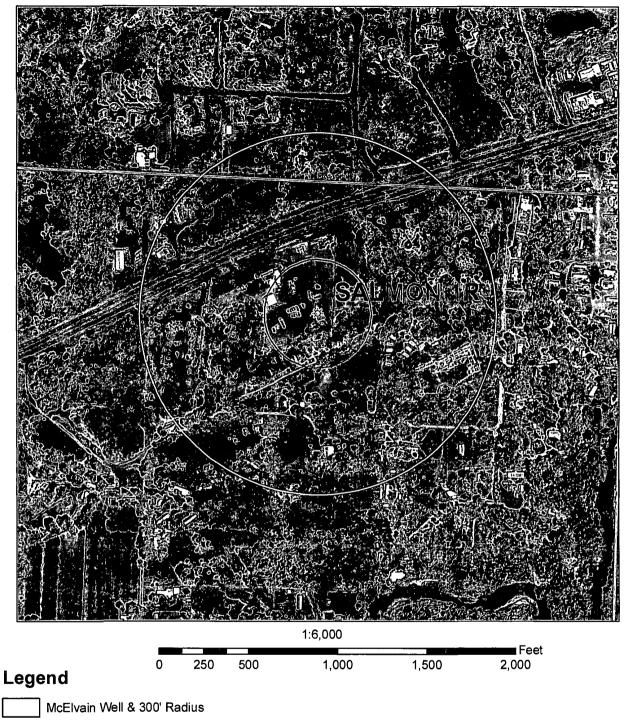

McElvain Well & 1000' Radius

Aerial Source: NM Resource Geographic Information System Program made available by the University of New Mexico and the State of New Mexico 2005-2006 vintage Digital Orthophoto Quarter-Quadrangles were derived from the New Mexico Statewide Orthophotography Project. Source imagery flown at 35,000' above average ground.

San Juan Basin **New Mexico** Township 29N 11W Section 30

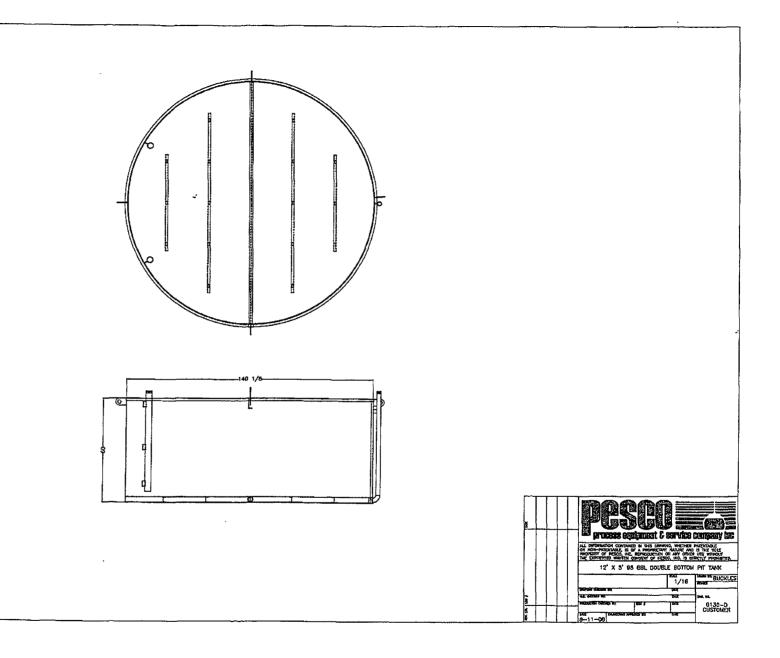

### **Siting Criteria Compliance Demonstrations**

Salmon #1R well is not located in an unstable area. The location is not over a mine and is not on the side of a hill. The location of the excavated pit material is not located within 300' of any continuously flowing watercourse or 200' from any other water course.

# McElvain Oil & Gas Properties, Inc. San Juan Basin Below Grade Tank Design and Construction

In accordance with Rule 19.15.17 NMAC the following describes the as-built construction of the Below Grade Tank on the McElvain Oil & Gas Properties, Inc (MOG) Salmon #1R well located in the NWNE of Sec 30, T29N, 11W.

#### As-built Installation:

- 1. The existing tank pit consists of an approximate 15 foot by 15 foot metal shored hole into which a 12 foot by 5 foot single walled, double bottom, steel, 95 bbl tank with leak detection is placed.
- 2. The tank walls are open for visual inspection to identify the occurrence of leaks.
- 3. There is an expanded metal covering on the top of the below grade tank.
- 4. The tank pit is surrounded by a 30ft X 30ft X 2ft berm that is contained within a 50 ft X 140 ft berm that encloses the tank battery to prevent overflow or surface water run-on.
- 5. A general location sign is displayed on site.
- 6. The pit tank is fenced with 4 foot field fence with a top rail.

# McElvain Oil & Gas Properties, Inc. San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 NMAC the following describes the below grade tank operation and maintenance plan for the McElvain Oil & Gas Properties, Inc (MOG) on the Salmon #1R well located in the NWNE of Sec 30, T29N, 11W.

### General Plan:

- 1. MOG shall operate and maintain the below grade tank to contain liquids and solids and prevent contamination of fresh water to protect the public health and environment.
- 2. MOG shall not allow a below grade tank to overflow or allow surface water run-on to enter the below grade tank.
- 3. MOG shall continuously remove any visible or measurable layer of oil from the fluid surface of a below grade tank in an effort to prevent significant accumulation of oil over time.
- 4. MOG shall inspect the below grade tank monthly and maintain a written record of each inspection for five years.
- 5. MOG shall maintain adequate freeboard to prevent overtopping of the below grade tank.

## McElvain Oil & Gas Properties, Inc. San Juan Basin Closure Plan

In accordance with Rule 19.15.17.1 NMAC the following procedure describes the closure plan for the McElvain Oil & Gas Properties, Inc (MOG) below grade tank on the Salmon #1R well located in the NWNE of Sec 30, T29N, 11W.

### **Closure Requirements:**

- 1. MOG shall close the below grade tank within the time periods provided in 19.15.17.13 NMAC or by an earlier date that the division requires because of imminent danger to fresh water, public health, or the environment.
- 2. MOG shall close an existing below grade tank that does not meet the requirements of Paragraph (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008 if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. MOG shall close a permitted below grade tank within 60 days of cessation of the below ground tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on C-144.
- 4. All liquids will be removed from the temporary permit prior to closure and the liquids disposed of in a division approved facility.
- 5. MOG shall remove the below grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. MOG will remove any on-site equipment associated with the below grade tank unless the equipment is required for some other purpose.
- 7. MOG shall test the soils beneath the below grade tank to determine whether a release has occurred. MOG shall collect a five point composite sample and individual grab samples from any area that is wet, discolored, or showing other evidence of a release. The samples will be analyzed for BTEX, TPH, and chlorides to demonstrate that the benzene concentration as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration as determined by EPA method 418.1 or other EPA method that the division approves does not exceed 100 mg/kg; and the chloride concentration as determined by EPA

- method 300.1 or other EPA method that the division approves does not exceed 250 mg/kg or the background concentration, whichever is greater. MOG shall notify the division of its results on form C-141.
- 8. If MOG or the division determines that a release has occurred, then MOG shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC as appropriate.
- 9. If contamination is confirmed by field sampling. MOG will follow the Guidelines For Remediation Of Leaks, Spills, and Releases NMOCD August 1993 when remediating identified contaminants.
- 10. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then MOG shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; re-contour, and re-vegetate the site.
- 11. Notice of closure will be given to the Aztec Division office between 72 hours and one week of closure via email or verbally. The notification of closure will include the following:
  - · Operator's name
  - · Location by Unit Letter, Section Township, and Range.
  - · Well name and API number
- 12. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the blow grade tank. The closure report will be filed on C-144 and incorporate the following:
  - · Details on capping and covering where applicable
  - · Inspection reports
  - · Sampling results
- 13. The site will be re-contoured to match the surrounding area. Natural drainages will be unimpeded and erosion control will be utilized where necessary.
- 14. MOG shall seed the disturbed areas the first growing season with a division approved seed mixture after pit closure. Seeding will be accomplished by drilling on the contour whenever possible or by other division approved methods. Repeat seeding or planting will be continued until successful vegetative growth occurs.
- 15. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the thickness of the topsoil native to the area, whichever is greater.

16. The surface owner shall be notified of MOG's closing of the below grade tank as per the approved closure plan using certified mail with return receipt requested.

### Hydrogeological Report For

### Salmon #1R

Surface Formation:

Quaternary Alluvium

### Regional and Local Geology

Quaternary deposits are unconsolidated Holocene to upper Pleistocene alluvial (valley-fill and terrace) deposits made up of gravel, sand, silt and clay. All drainage ways in the San Juan Basin contain alluvial valley fill. The valleys of the San Juan River and its tributaries contain extensive terrace deposits. Valley fill (Quaternary sediments) in the San Juan River valley does not exceed 100 feet in thickness. Quaternary terrace deposits are boulder gravel resting on benches cut into the Tertiary bedrock units. The boulders do not exceed 12 inches in diameter, are very well rounded and consist of various igneous and metamorphic rock types. Maximum thickness of Quaternary terrace deposits is about 30 feet. The Quaternary sediments form a disconformable contact with all underlying units. Much of the water in the valley fill of the San Juan, Animas and La Plata River valleys comes from drainage of irrigated lands and some from underlying and adjacent bedrock units (Stone et al., 1983).

#### **Hydraulic Properties**

There are limited fresh water quantities in Quaternary alluvium (Stone et al., 1983). Irrigation drainage and underlying source rock water contributions can affect water quality in Quaternary sediments because of their relatively high dissolved solids concentrations. Much of the water in the valley fill ultimately reaches the rivers and contributes to their dissolved solids concentrations, as well. Average water quality in the Animas river valley sediments is approximately 1500  $\mu$ mhos and approximately 2500  $\mu$ mhos in the San Juan and La Plata river valley deposits. Transmissivity ranges from less than 1000 ft²/d to over 15,000 ft²/d (Stone et al., 1983).

### **Hydrology**

A records search of the NM Office of the State Engineer iWaters database was conducted on a 9-section area centered on the section in which lies the Salmon #1R well location, 29N 11W section 30. In section 30, 17 water wells were located; 15 wells are domestic, 2 are used for irrigation. Average depth of water in these wells is 16', minimum 6'. 6 of the 17 wells have reported depth-to-water. The water depths coincide with the surface elevation of the San Juan River which is 5380'. Conclusion

Based on topography and iWaters data, water depths in wells in the immediate area are found close to the La Plata River surface elevation. The Salmons #1R is located on a bluff, 93' above the river's elevation. Considering a semi-horizontal water table, water depth at the Salmon #1R location should be at 93'.

### References

Scholle, P.A., 2003, Geologic Map of New Mexico 1:500,000, NM Bureau of Geology and Mineral Resources, published in cooperation with the USGS, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico, New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6, 70p.

Salmon #IR Pg 2

6. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits; and below-grade tanks)  ⊠ Cliain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)  □ Four foot height, four strands of barbed wire evenly spaced between one and four feet □ Alternate. Please specify.	
7.  Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting Other_Expanded Metal  Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19:15.17.11 NMAC  12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  Signed in compliance with 19:15:3.103 NMAC	
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.  Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.	
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes:⊠ No
Within 300 feet of a continuously flowing watercourse; or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ဩ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to permanent pits)  - Visual inspection (certification) of the proposed site; Acrial photo; Satellite image	Yes No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	X Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality, Written approval obtained from the municipality	☐ Yes ☒ No
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes 🛭 No
<ul> <li>Within an unstable area.</li> <li>Engineering-measures incorporated into the design; NM Bureau of Geology &amp; Mineral Resources; USGS; NM Geological Society; Topographic map</li> </ul>	☐ Yes 🛭 No
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No

BGT Closure Sampling Required by NMOCD Components Method

EPA 300.1

Chlorides

 Benzene
 EPA SW-846 8021B or 8260B
 0.2 mg/Kg

 BTEX
 EPA SW-846 8021B or 8260B
 50 mg/Kg

 TPH
 EPA SW-846 418.1
 100 mg/Kg

Limit

250 mg/Kg