Form 3160-3

(August 1999) FORM APPROVED UNITED STATES OMB NO. 1004-0136 DEPARTMENT OF THE INTERIOR Expires: November 30, 2000 BUREAU OF LAND MANAGEMENT 5. Lease Serial No. NM03603-A APPLICATION FOR PERMIT TO DRILL OR REENTER 6. If Indian, Allottee or Tribe Name 070 FARMINGTON la. Type of Work: REENTER I DRILL 7. If Unit or CA Agreement, Name and No. 1b. Type of Well: □Oil Well ☑ Gas Well □Other ☑ Single Zone ☐ Multiple Zone 8. Lease Name and Well No. Hammond #15 9. API Well No. 2. Name of Operator 30-045-33205 ROBERT L. BAYLESS, PRODUCER LLC 10. Field and Pool, or Exploratory 3a. Address 3b. Phone No. (include area code) (505) 326-2659 **Basin Fruitland Coal** P.O. BOX 168, FARMINGTON, NM 87499 4. Location of Well (Report location clearly and in accordance with an State requirements *) 11. Sec., T., R., M., or Bik. and Survey or Area At surface 1300 FNL & 1150 FEL Section 26, T27N, R8W At proposed prod. zone **SAME** 12. County or Parish Distance in Miles and Direction from nearest town or post office* 13. State San Juan New Mexico 15. Distance from proposed* 16. No. of Acres in Lease 17. Spacing Unit dedicated to this well location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 19. Proposed Depth 18 Distance from proposed location* 20. BLM/BIA Bond No. on file 2200 40S23024BCA to nearest well, drilling, completed, or applied for, on this Lease, ft. 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 22. Approximate date work will start* 23. Estimated duration **ASAP** 5950 RKB 8 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form: 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see 2. A Drilling Plan. Item 20 above). 3. A Surface Use Plan (if the location is on National Forest System Lands, the 5. Operator certification. 6. Such other site specific information and/or plans as may be required by the SUPO shall be filed with the appropriate Forest Service Office). authorized officer. 25. Signature Name (Printed/Typed) 6-28-01 Price M. Bayless Title Engineering Approved by Name (Printed/Typed) Office farrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to o Application approval does not operations thereon Conditions of approval, if any, are attached Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any departm

"GENERAL REQUIREMENTS".

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED

States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102

Revised June 10, 2003

Submit to Appropriate District Office

State Lease - 4 Copies


Fee Lease - 3 Copies

☐ AMENDED REPORT

		•	•										
				WELL LO	CAT	OI	NAND ACR	EAGE DEDIC	ATION PLA	T			
'API Number					² Pool Code			² Pool Name					
				7.	1629			Basin Frü	itland Co	al			
Property Code			* Property Name								'Well Number		
35694			HAMMOND								15		
'OGRID No.			Operator Name								'Elevation		
150182			ROBERT L. BA			BAYLESS	ESS, PRODUCER LLC		5945				
							10 Surface	Location	_				
VL or lot no.		Section	Township	Range	Lot	i Ida	Feet from the	North/South line	Feet from the	Eas	t/West line		County
A ·		26	27N	8W	İ		1300	North	1150	Eas	t	San	Juai
				¹¹ B	ottom	Ho	le Location It	Different From	n Surface				
UL or lot no. Sec		Section	Township				Feet from the			Eas	t/West line		County
	1]										
"Dedicated Acres Dala		D Joint o	r Infill	" Consolidation	Code	¹⁵ Order No.			· · · · · · · · · · · · · · · · · · ·	·		·	
270						1							

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION 16 588 47'W 17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. LAT. 36.54828°N ONG. 107.64689°W 1150 Price M. Bayless Engineering Manager Title and E-mail Address 6-28-05 Date Sec. ¹⁸SURVEYOR CERTIFICATION 26 I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true II S89953'W 78.12c4

ROBERT L. BAYLESS, PRODUCER LLC HAMMOND #15
1300'FNL & 1150'FEL
Sec.26, T27N, R8W, NMPM
San Juan Co., NM

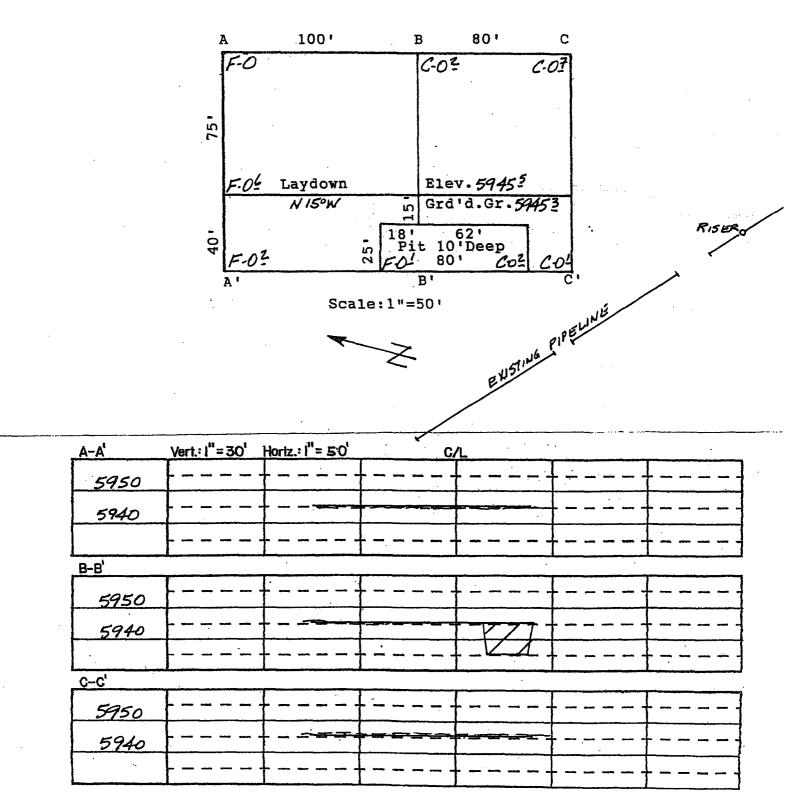

Robert L. Bayless, Producer LLC

Drilling Technical Program

(Attachment to Form 3160-3)

Hammond #15

1300 FNL & 1150 FEL (nene) Section 26, T27N, R8W San Juan County, New Mexico

1. ESTIMATED FORMATION TOPS

<u>Formation</u>	Depth KB	Est Pressure
San Jose	Surface	
Ojo Alamo	1275 feet	
Kirtland	1415 feet	
Fruitland	1880 feet	500 psi
Pictured Cliffs	2100 feet	550 psi
Total Depth	2200 feet	<u>-</u>

2. WELL CONTROL SYSTEM

- A. The proposed blowout system (schematic drawings attached) is a double ram type preventer, and will be used in 1000 psi service. The wellhead pressure is anticipated to be low and no gas flow to surface.
- B. Maximum anticipated bottom hole pressure = 550 psi. Well Control Anticipated Surface Pressure (ASP) = 550 psi.
- C. The BOP will be tested to 600 psi after installation and prior to drilling out surface casing shoe. The pipe rams will be closed daily and blind rams will be closed on each trip. A choke manifold will be installed as per attached drawing and tested to 600 psi prior to drilling out of surface pipe. Working pressure for the choke manifold is 2000 psi. In addition, a kill line from the mud pump will be installed.
- D. Stabbing valves for drill pipe and drill collars will be available on the rig floor. An upper kelly cock will also be available on the rig.
- E. Anticipated formation pressures average .25 psi/ft gradient and formation fracture pressures are anticipated to exceed the maximum mud weight of 9.1 pounds per gallon.

3. DRILLING MUD PROGRAM

A. An 8 3/4" surface hole will be drilled with a fresh water system. Lime and gel will be added to provide viscosity as needed.

B. A 6 1/4" hole will be drilled to total depth utilizing LSND mud.

Interval	Mud System	Weight PPG	Viscosity sec/qt	WL cc	
0 – 120 ft	Spud mud	<9.0	35 – 55	NC	
120 - 2200	LSND	8.6 - 9.3	28 - 50	<12	

C. Mud level monitoring will be done visually.

4. HAZARDS

- A. Abnormal pressure is not expected in this area.
- B. Lost circulation is expected to be of minimal problems in this area.
- C. No hydrogen sulfide is expected. However, should hydrogen sulfide be encountered during drilling, detection and warning systems will be installed.
- D. Hole deviation is not expected in this area. Single shot surveys giving hole inclination will be run a minimum of every 500 feet.

5. LOGGING AND TESTING

- A. Induction and density logs will be run from total depth across all zones of interest.
- B. No drill stem tests are anticipated in this well.
- C. No cores are anticipated in this well.
- D. No mud logging unit will be used on this well.

6. CASING PROGRAM

- A. Surface casing: 7" 20.0 #/ft J-55 from surface to 120 feet
- B. Production casing: 4 1/2" 10.5 #/ft J-55 from surface to 2200 feet.
- C. A proposed wellbore diagram is attached.

7. **CEMENTING PROGRAM**

- A. Surface casing: 30 sx (42.0 cf) Type III w/ 3% CaCl and ¼ #/sx celloflake, circulated to surface
- B. Production Casing: 130 sx (280 cf) Premium Lite High Strength cement circulated to surface, volume may change due to caliper log on well.

Robert L. Bayless, Producer LLC

Well Control Equipment Schematic for 1M Service

Attachment to Drilling Technical Program


Hammond #15

Location:

NENE

Sec 26, T27N, R8W, NMPM San Juan, New Mexcio



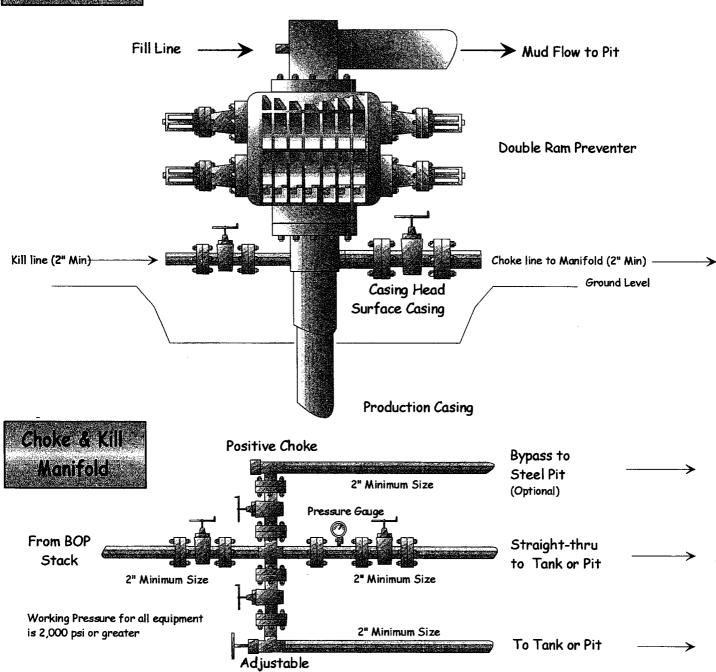

Choke

Robert L. Bayless, Producer LLC Wellbore Schematic

Hammond #15

Proposed Wellbore Configuration

Location: 1300 FNL & 1150 FEL (nene) Elevation: 5945' GL Sec 26, T27N, R8W, NMPM 5950' RKB San Juan Co, New Mexico Field: Basin Fruitland Coal Bit Size - 8 3/4" 7" 20# J55 @ 120' KB w/ 30 sx (TOC @ Surface) Bit Size 6 1/4" Ojo Alamo - 1275' 2-3/8" EUE 4.7# J55 Tubing Kirtland - 1415 Fruitland - 1880' Fruitland Coal Perfs Pictured Cliffs - 2100' 4 1/2" 10.5# J55 Production Csg @ 2100' KB

TD @ 2100' KB

w/130 sx