



NEW MEXICO ENERGY, MINERALS
& NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION
AZTEC DISTRICT OFFICE
1000 RIO BRAZOS ROAD
AZTEC NM 87410
(505) 334-6178 FAX: (505) 334-6170
[http://emnrd.state.nm.us/ocd/District III/3distric.htm](http://emnrd.state.nm.us/ocd/District%20III/3distric.htm)

BRADENHEAD TEST REPORT

(submit 1 copy to above address)

Date of Test 7-3-13 Operator BP America API #30-0 45-11592
Property Name GCU Well No. 195 Location: Unit N Section 33 Township 29 Range 12
Well Status (Shut-In or Producing) Initial PSI: Tubing 18 Intermediate N/A Casing 32 Bradenhead 35

OPEN BRADENHEAD AND INTERMEDIATE TO ATMOSPHERE INDIVIDUALLY FOR 15 MINUTES EACH

Testing	PRESSURE			INTERM	
	Bradenhead				
	BH	Int	Csg	Int	Csg
TIME					
5 min	<u>0</u>		<u>35</u>		
10 min	<u>0</u>		<u>35</u>		
15 min	<u>0</u>		<u>35</u>		
20 min	<u>0</u>		<u>35</u>		
25 min	<u>0</u>		<u>35</u>		
30 min	<u>0</u>		<u>35</u>		

	FLOW CHARACTERISTICS	
	BRADENHEAD	INTERMEDIATE
Steady Flow		
Surges		
Down to Nothing	<u>/</u>	
Nothing		
Gas	<u>/</u>	
Gas & Water		
Water		

If bradenhead flowed water, check all of the descriptions that apply below:

CLEAR _____ FRESH _____ SALTY _____ SULFUR _____ BLACK _____

5 MINUTE SHUT-IN PRESSURE

BRADENHEAD 0

INTERMEDIATE N/A

REMARKS:

pu/b to vapors in 2 seconds. dead at 5 min.

By

Ray Jadesma
TECK

(Position)

Witness

Monica Ketting

E-mail address _____



Gallegos Canyon Unit 195

Dakota


API # 30-045-11592

790' FSL & 2310' FWL, Sec. 33

T-29-N, R-12-W

San Juan County, New Mexico

G.L. 5415'
K.B. 5429'

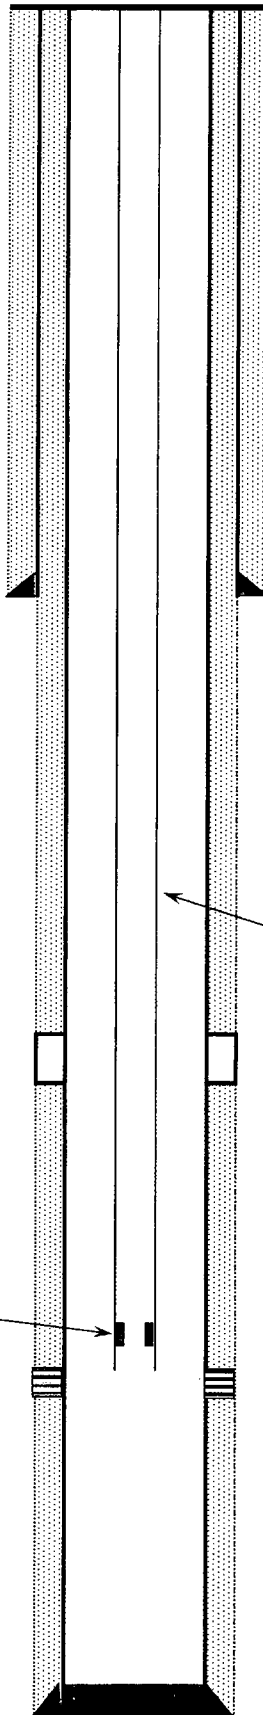

12 1/4" Hole
8 5/8", J-55, 24#, ST&C @ 359'
Cmt w/ 250 sxs type "C" w/ 2% CaCl

2 3/8", 4.7#, J-55, EUE 8rd

DV tool @ 4141'

Seating nipple I.D. 1.780" @ 5875
End of String @ 5920'

Dakota Perforations

5850 - 5864' w/ 4 JSPF, fracd w/ 10,920 gal. KCl/FR-2 water,
11,200# 20/40, re-frac w/ 29,400 gal KCl/FR-2 water, 34,000# 20/40,
4K# AMOCO 506 MCF-2.
5932' - 5939', 5952' - 5962' w/ 4 JSPF, fracd w/ 36,498 gal. KCl/FR-2 water
40K # 20/40 & 10K # 10/20 Brady sand.

TD: 6037'
PBTD: 6002'

7 7/8" Hole
4 1/2", J-55, 10.5#, ST&C @ 6037'
Cmt w/ 1st Stage 400 sxs type "C" w/ 6% gel & 2# tuf plug per sack
and 100 sxs type "C" neat
2nd Stage 650 sxs type "C" w/ 6% gel & 2# tuf plug per sack