## District I 1625 N. French Dr., Hobbs, NM 88240 District II

1301 W. Grand Avenue, Artesia, NM 88210

District III 1000 Rio Brazos Road, Aztec, NM 87410

District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

## State of New Mexico

Energy Minerals and Natural Resources

## Oil Conservation Division

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144

June 1, 2004


For drilling and production facilities, submit to appropriate NMOCD District Office. For downstream facilities, submit to Santa Fe

Pit or Below-Gra	de Tank Registration or Clos	sure	
	nk covered by a "general plan"? Yes or below-grade tank Closure of a pit or		
Operator: BURLINGTON RESOURCES OIL & GAS COMPANY LP Telephone:	505-326-9700 e-mail address: fbond@br	-inc.com	
Address: 3401 E. 30TH STREET, FARMINGTON, NM 87402	, sometimes.	Formation:	Blanco MV/Basin DK
Facility or well name: San Juan 27-4 Unit 46N API #:	30-039-27646 U/L or Qtr/Qtr C S	Sec 31 T 27N	R 4W
	7.17.4633W NAD: 1927 X 1983 Surface	e Owner Federal X State	Private Indian
Pit	Below-grade tank		
Type: Drilling X Production Disposal	Volume:bbl Type of fluid:		
Workover Emergency	Construction material:  Double-walled, with leak detection? Yes If If not, explain why not.		
Lined Unlined Thiskness 12 mil Clay	n in not, explain why not.		
Liner type: Synthetic Thickness 12 mil Clay Pit Volume bbl		<u></u>	<del></del>
Depth to ground water (vertical distance from bottom of pit to seasonal high	Less than 50 feet	(20 points)	
water elevation of ground water.)	50 feet or more, but less than 100 feet 100 feet or more	(10 points) ( 0 points)	0
	100 feet of more	( o points)	
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes No	(20 points) ( 0 points)	0
Distance to surface water: (horizontal distance to all wetlands, playas,	Less than 200 feet	(20 points)	
irrigation canals, ditches, and perennial and ephemeral watercourses.)	200 feet or more, but less than 1000 feet	(10 points)	•
	1000 feet or more	( 0 points)	
	Ranking Score (Total Points)	0	
If this is a pit closure: (1) attach a diagram of the facility showing the pit's rela	ationship to other equipment and tanks. (2) Indica	te disposal location: (chec	k the onsite box if
your are burying in place) onsite offsite If offsite, name of facilit	. (3) Attach a g	general description of reme	dial action taken including
remediation start date and end date. (4) Groundwater encountered: No	res If yes, show depth below ground surface	ft. and attac	ch sample results. (5)
Attach soil sample results and a diagram of sample locations and excavations.			
Additional Comments: This well is located within a "vulnerable area	N		26 27 28 20
See attached well pad diagram for direction and distance of pit from well head			
SEP 0 2			SEP 3
		S Ou	ECENTOS W
		<u></u>	ONO ED
		The state of the s	ST. 3 OIV. Of
		69,	
I hereby certify that the information above is true and complete to the best of m been/will be constructed or closed according to NMOCD guidelines ,	ny knowledge and belief. I further certify that the	ne above-described pit or	below-grade cancelas
Date: 9/29/05	a general permit $\overline{X}$ , or an (attached) altern	ative OCD-approved <del>pią</del> ∕/	Me all lives
Printed Name/Title Regulatory Specialist	Signature Frances A	Sand	
Your certification and NMOCD approval of this application/closure does not re otherwise endanger public health or the environment. Nor does it relieve the o			
regulations.	<u> </u>		
Approval:		, ,	
Printed Name/Title	Signature Deny	ant	SEP 29 2005

JUN KESUUKCES UIL & GAS CUMPANI, LE JUAN 27-4 UNIT #46N, 1000' FNL & 2600' FWL JN 31, T27N, R4W, NMPM, RIO ARRIBA COUNTY, NM JUND HLEVATION: 6829' DATE: SEPTEMBER 25, 2003


LATITUDE: 36°32°04"
LONGITUDE: 107°17'28"

DATUM: NADI921

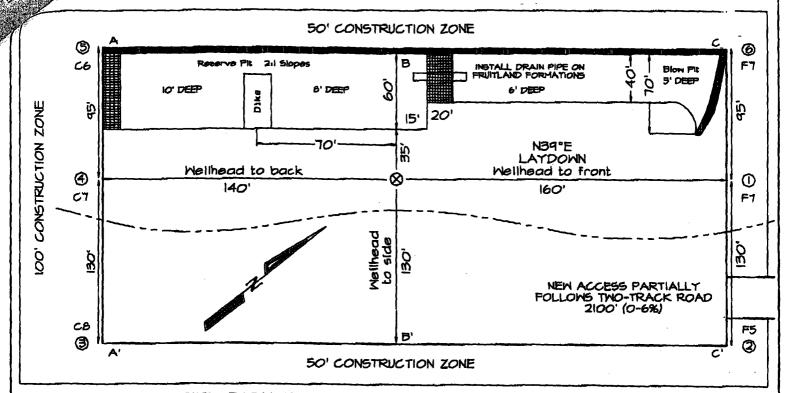

SIZE OF WELLPAD 225' X 300' (325' x 450') = 336 ACRES

Reserve Pit Dike: to be 8' above Deep side (overflow - 3' wide and 1' above shallow side). Blow Pit: overflow pipe halfway between top and bottom and to extend over plastic liner and into blow pit.

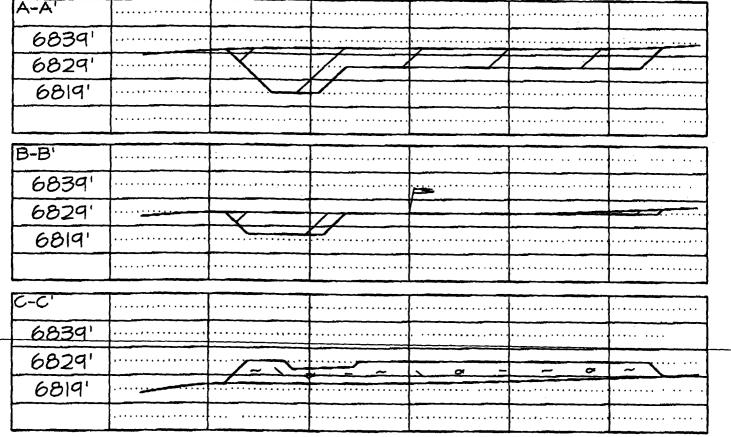

Note: Contractor should call One-Call for location of any marked or unmarked buried pipelines or cables on well pad and/or access road at least two (2) working days prior to construction

