	Foj 3160-5 (November 1994) DE	UNITED STATES PARTMENT OF THE INTEI			<u> </u>	ORM APPROVED MB No. 1004-0135 spires July 31, 1996	
	BUREAU OF LAND MANAGEMENT				5Lease Serial		
	SUNDRY NOTICES AND REPORTS ON WELLS				1-149-Ind-79		
	Do not use this form for proposals to drill or reenter $ABG 212014$ abandoned well. Use Form 3160-3 (APD) for such proposals.					lottee or Tribe Name	
					Navajo India	A/Agreement, Name and/or No.	
					10 h in h	A/Agreement, Name and/or No.	
					N/A		
	1. Oil Well 🕱 Gas Well 🗋 Other				8. Well Name	and No.	
						te 33G Com #1	
	Im Ridge Exploration Company, LLC				9. API Well No		
	3a. Address 3b.				30-045-2910		
			05-632-3476 ext. 201			ool, or Exploratory Area	
R	4. Location of Well (Footage, Sec., T., R., M., or Survey Description)			Basin Fruitla			
Ċ	1675' FNL X 2230' FEL			11. County or P	arish, State		
	"G" Sec.33-T26N-R11W				San Juan County, NM		
	12. CHECK APPROPRIATE BOX(I	ES) TO INDICATE NATURE OF	F NOTICE, REPORT, C	OR OTHER DA	т <u>а</u> ТА		
	TYPE OF SUBMISSION	TYPE OF ACTION					
	Notice of Intent	Acidize	Deepen	Production (	Start/Resume)	Water Shut-Off	
	Subsequent Report	Alter Casing	Fracture Treat	Reclamation Recomplete		<ul> <li>Well Integrity</li> <li>Other</li> </ul>	
		Change Plans	Plug and Abandon	Temporarily	Abandon		
	Final Abandonment Notice	Convert to Injection	Plug Back	Water Dispo	sal		
	Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BLA. Required subsequent reports shall be filed within 30 days Following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once Testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.) EIM Ridge Exploration Co., LLC requests permission to plug and abandon the following well according to the				160-4 shall be filed once ed, and the operator has		
	allacheu procedure.	attached procedure.			<b>SC</b>	JD AUG 29 '14	
					OIL CONS. DIV.		
	BLM'S APPROVAL OR ACCEPTANCE OF THIS Notify NMOCD 24 hrs ACTION DOES NOT RELIEVE THE LESSEE ANDprior to beginning OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS					D <sup>PETR<sup>3</sup></sup>	
	<ol> <li>I hereby certify that the foregoing is Name (Printed/Typed)</li> </ol>	true and correct	Title				
				Sr. Regula	gulatory Supervisor		
	Signature	Signature Date Aug			ust 19, 2014		
:	THIS SPACE FOR FEDERAL OR STATE USE						
Approved by Troy Salvers Petroleum Eng. Date 8/26/2014						21/2011	
	Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable tile to those rights in the subject lease which would entitle the applicant to conduct operations thereon.						
:	Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.					ates any false, fictitious or	
;	(Instructions on reverse)						



# **Elm Ridge Resources**

# Pertinent Data Sheet

Well Name:	Buena Suerte 33G Com #1
Footage:	1675' FNL and 2230' FEL
Location:	SWNE Section 33, T26N, R11W
County:	San Juan County, NM
API#:	30-045-29100

Field:	Basin Fruitland Coal	Elevation:	6215' KB	<b>TD</b> : 1395' KB
				<b>PBTD:</b> 1374' KB

**Completed:** 05/23/1994

## Casing Record:

ŝ.

,

.

Hole Size	Casing Size	Wt.	Grade	Depth Set	Cement
8-3/4"	7"	20#	J-55	130'	70.8 cu. ft. (Circ. to surface)
6-1/4"	4-1/2"	10.5#	J-55	1394'	324 cu. ft. (Circ. to surface)

• . .

Tubing: 2-3/8" tubing set at 1299'

## Formation Tops:

Nacimiento	Surface
Fruitland	1159'
Pictured Cliffs	1293'

#### **Perforations:**

Fruitland perforations: 1274'-1290'

.


### Notes:

## Wellbore Diagram Buena Suerte 33G Com#1 SWNE Sec. 33, T26N, R11W San Juan County, NM API #30-045-29100

5.

14.1


#### Before

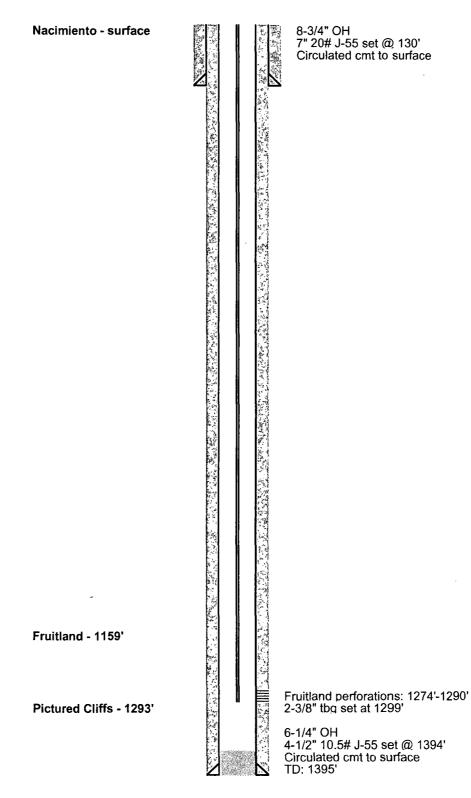

Buena Suerte 33G Com #1 WBD 8/19/2014

### Wellbore Diagram Buena Suerte 33G Com#1 SWNE Sec. 33, T26N, R11W San Juan County, NM API #30-045-29100

After

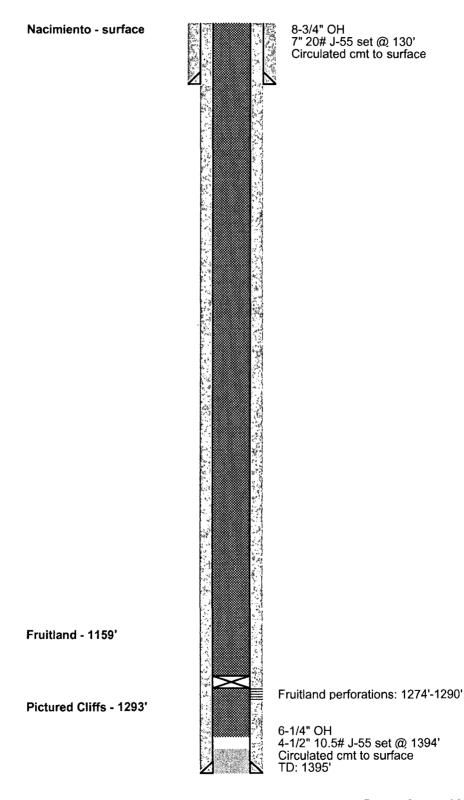

Buena Suerte 33G Com #1 WBD 8/19/2014

## Plugging Program for Bisti 33G Com #1

1) MOL RU. TOOH with 1-1/2" tubing.

• -t +

•

- 2) PU and TIH with 4-1/2" retainer to 1270'. Squeeze below retainer with 10 sx cmt.
- 3) Sting out, mix and pump 100 sx, or sufficient volume, to bring cement to surface inside 4-1/2" casing.
- 4) Cut off well head 4 feet below surface and remediate location in accordance with regulatory agencies' conditions of approval.

,

## UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FARMINGTON DISTRICT OFFICE

6251 COLLEGE BLVD. FARMINGTON, NEW MEXICO 87402

Attachment to notice of Intention to Abandon:

Re: Permanent Abandonment Well: Buena Suerte 33G Com #1

#### CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."

2. Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 564-7750.

Note: H2S has not been reported in this section; however, low concentrations of H2S (11-16 ppm GSV) have been reported in the NE/NE of section 27-26N-11W.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.