

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

ENERGEN RESOURCES CORPORATION

3a. Address

2010 Afton Place, Farmington, NM 87401

3b. Phone No. (include area code)

505.325.6800

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1000' FNL 1550' FEL Sec. 14 T24N R03W

1090'

5. Lease Serial No.

SE078912

6. If Indian, Allottee or Tribe Name

RCVD SEP 29 '14
OIL CONS. DIV.

7. If Unit or CA/Agreement, Name and/or No.

Lindrith Unit
DIST. 3

8. Well Name and No.

Lindrith Unit 6

9. API Well No.

30-039-05498

10. Field and Pool, or Exploratory Area

S. Blanco Pictured Cliffs

11. County or Parish, State

Rio Arriba NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Acidize ☐ Deepen ☐ Production (Start/Resume) ☐ Water Shut-Off
☐ Alter Casing ☐ Fracture Treat ☐ Reclamation ☐ Well Integrity
☐ Casing Repair ☐ New Construction ☐ Recomplete ☐ Other
☐ Change Plans ☒ Plug and Abandon ☐ Temporarily Abandon
☐ Convert to Injection ☐ Plug Back ☐ Water Disposal

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

Energgen Resources intends to plug and abandon the Lindrith Unit #6 according to attached downhole and reclamation procedures.

This will be a closed loop operation. NMOC will be notified 24 hrs prior to commencing operations.

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

SEE ATTACHED FOR
CONDITIONS OF APPROVAL



H₂S POTENTIAL EXIST

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Kyle Mason

Title District Engineer

Signature

Date 09/17/14

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Troy Salyers

Title

Petroleum Eng.

Date

9/25/2014

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

FFO

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NMOC

PLUG AND ABANDONMENT PROCEDURE

August 30, 2014

Lindrith Unit #6

South Blanco Pictured Cliffs Ext.

1090' FNL, 1550' FEL, Section 14, T24N, R3W, Rio Arriba County, New Mexico

API 30-039-05498 / Long _____ / Lat: _____

Note: All cement volumes use 100% excess outside pipe and 50' excess inside. The stabilizing wellbore fluid will be 8.3 ppg, sufficient to balance all exposed formation pressures. All cement will be Class B, mixed at 15.6 ppg with a 1.18 cf/sx yield.

1. This project will use of an A-Plus steel tank to handle waste fluids circulated from the well and cement wash up.
2. Install and test location rig anchors. Comply with all NMOCD, BLM, and Operator safety regulations. MOL and RU daylight pulling unit. Conduct safety meeting for all personnel on location. Record casing, tubing and bradenhead pressures. NU relief line and blow down well. Kill well with water as necessary and at least pump tubing capacity of water down the tubing. ND wellhead and NU BOP. Function test BOP.
3. Rods: Yes____, No X, Unknown____.
Tubing: Yes X, No____, Unknown____, Size 1-1/4", Length 3120'.
Packer: Yes____, No X, Unknown____, Type _____.

If this well has rods or a packer, then modify the work sequence in step #2 as appropriate. Note: LD 1-1/4" tubing and PU workstring. Round trip gauge ring or casing scraper to 3030' or as deep as possible.

4. **NOTE: BLM requires a CBL log to be run on all wells where the cement did not circulate to surface or where a CBL log was not previously run. This procedure is prepared with the understanding that it may be modified based on the TOC from the CBL.**
5. **Plug #1 (Pictured Cliffs interval, Fruitland, Kirtland and Ojo Alamo tops 3030' – 2612'):** TIH and set 5.5" CR at 3030'. Pressure test tubing to 1000#. Load casing with water and circulate well clean. Pressure test casing to 800#. *If the casing does not test, then spot or tag subsequent plugs as appropriate.* Mix 53 sxs Class B cement and spot a balanced plug inside the casing above the CR to isolate the Pictured Cliffs interval, Fruitland, Kirtland and Ojo Alamo tops. TOH.

See COA
6. **Plug #2 (Nacimiento top 1242' – 1142'):** Perforate squeeze holes at 1242'. Attempt to establish rate if the casing pressure tested. TIH and set CR at 1192'. Mix and pump 60 sxs Class B cement, squeeze 43 sxs outside 5.5" casing and leave 17 sxs inside casing to cover the Nacimiento top. TOH and LD tubing.
7. **Plug #3 (9-5/8" surface casing shoe, 161' - Surface):** Perforate 3 squeeze holes at 161'. Establish circulation out bradenhead with water and circulate the BH annulus clean. Mix approximately 75 sxs Class B cement and pump down the 5.5" casing to circulate good cement out bradenhead. Shut in well and WOC.
8. ND cementing valves and cut off wellhead. Fill annuli with cement as necessary. Install P&A marker to comply with regulations. Record GPS coordinate for P&A marker on tower report. Photograph P&A marker in place. RD, MOL and cut off anchors. Restore location per BLM stipulations

Lindrith Unit #6

Current

South Blanco Pictured Cliffs Ext.
1090' FNL, 1550' FEL, Section 14, T-24-N, R-3-W,
Rio Arriba County, NM / API #30-039-05498
Lat _____ / Long _____

Today's Date: 8/30/14

Spud: 6/4/56

Completed: 7/14/56

Elevation: 6952' GI

13-3/14" hole

9-5/8" 25.4# Casing set @ 111'
Cement with 125 sxs (Circulated to Surface)

Nacimiento @ 1192' est

149 jts, 1-1/4" tubing landed at 3120'

TOC @ 2200' (T.S.)

Ojo Alamo @ 2662'

ROVD SEP 29 '14

OIL CONS. DIV.

DIST. 3

Kirtland @ 2840'

Fruitland @ 2978'

Pictured Cliffs @ 3082'

Pictured Cliffs Perforations:
3080' - 3128'

5.5", 15.5#, J-55 Casing set @ 3160'
Cement with 150 sxs

8-3/4" hole

TD 3160'
PBSD 3145'

Lindrith Unit #6

Proposed P&A

South Blanco Pictured Cliffs Ext.
1090' FNL, 1550' FEL, Section 14, T-24-N, R-3-W,
Rio Arriba County, NM / API #30-039-05498
Lat _____ / Long _____

Today's Date: 8/30/14
Spud: 6/4/56
Completed: 7/14/56
Elevation: 6952' GI

13-3/4" hole

Nacimiento @ 1192' est


Ojo Alamo @ 2662'

Kirtland @ 2840'

Fruitland @ 2978'

Pictured Cliffs @ 3082'

8-3/4" hole

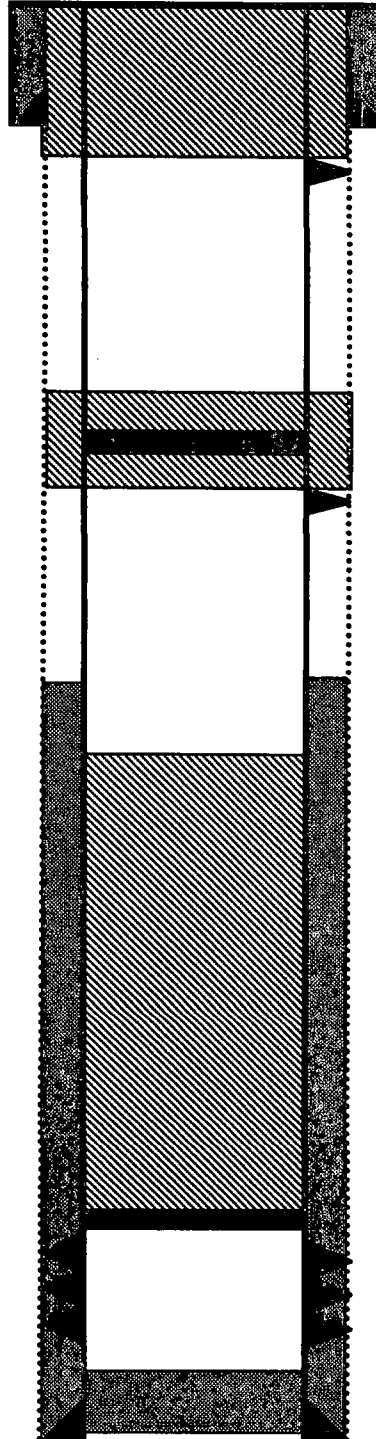

9-5/8" 25.4# Casing set @ 111'
Cement with 125 sxs (Circulated to Surface)

Perforate @ 161'

Plug #3: 161' - 0'
Class B cement, 75 sxs

Set CR @ 1192'

Plug #2: 1242' - 1142'
Class B cement, 60 sxs:
43 outside and 17 inside

Perforate @ 1242'

RCVD SEP 29 '14
OIL CONS. DIV.
DIST. 3

TOC @ 2200' (T.S.)

Plug #1: 3030' - 2612'
Class B cement, 53 sxs

Set CR @ 3030'

Pictured Cliffs Perforations:
3080' - 3128'

5.5", 15.5#, J-55 Casing set @ 3160'
Cement with 150 sxs

TD 3160'
PBTD 3145'

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402

Attachment to notice of
Intention to Abandon:

Re: Permanent Abandonment
Well: Lindrith Unit #6

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 564-7750.
3. Set plug 2 (1311-1211) ft. inside/outside to cover the Nacimiento formation.

Operator will run a CBL from 3030 ft. to surface. Outside plugs will be modified per CBL result. Submit electronic copy of the log for verification to the following addresses: tsalyers@blm.gov
Brandon.Powell@state.nm.us

Note: H₂S has not been reported in this section; however, low concentrations of H₂S (4-5 ppm GSV) have been reported in wells within a 1 mile radius of this location.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.