


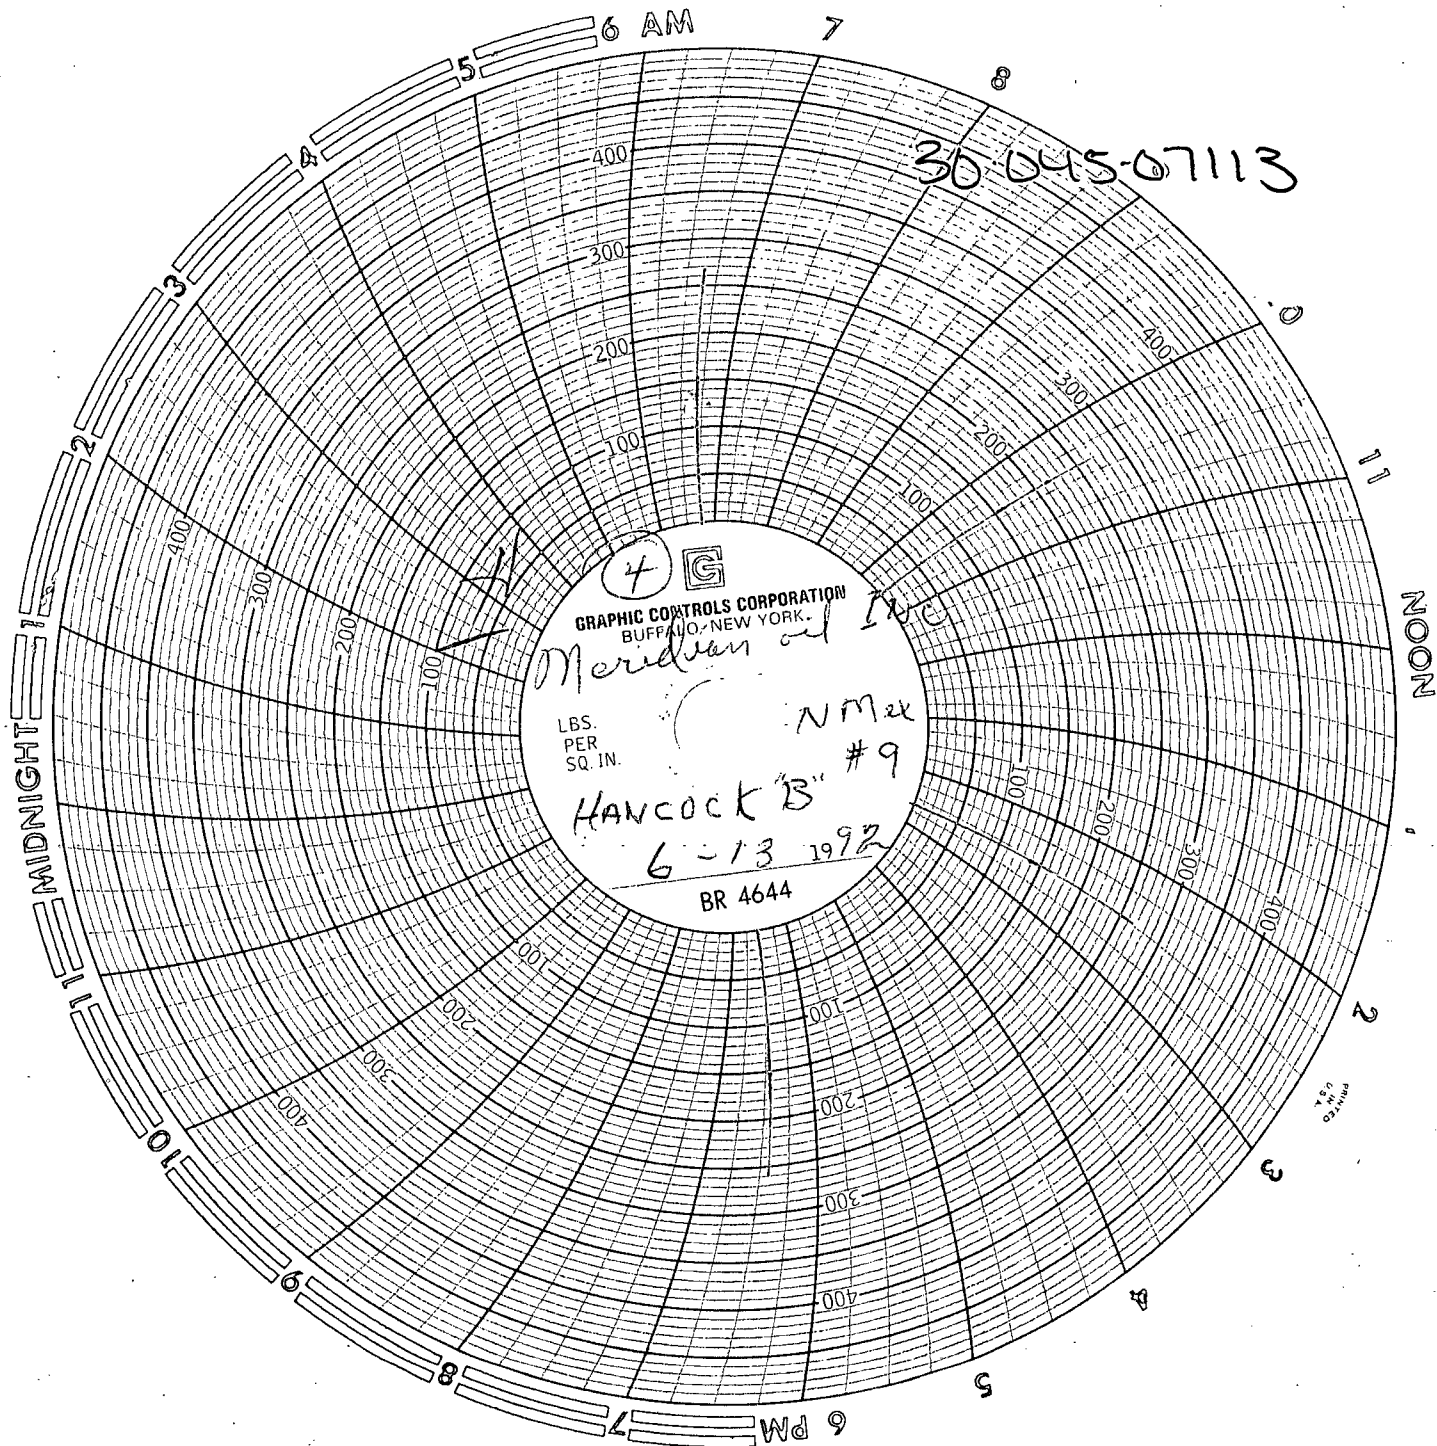

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well GAS 2. Name of Operator Meridian Oil Inc. 3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499 (505) 326-9700 4. Location of Well, Footage, Sec., T, R, M 950'FSL, 1148'FEL Sec.28, T-28-N, R-9-W, NMPM	5. Lease Number SF077107A 6. If Indian, All. or Tribe Name 7. Unit Agreement Name 8. Well Name & Number Hancock B #9 9. API Well No. 30045-07113 10. Field and Pool Aztec Pic.Cliffs 11. County and State San Juan Co, NM
---	--

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

Type of Action

☒ Notice of Intent	☒ Abandonment	☐ Change of Plans
☒ Subsequent Report	☐ Recompletion	☐ New Construction
☐ Final Abandonment	☐ Plugging Back	☐ Non-Routine Fracturing
	☐ Casing Repair	☐ Water Shut off
	☐ Altering Casing	☐ Conversion to Injection

13. Describe Proposed or Completed Operations

06-17-92 MOL&RU. ND WH. NU BOP. TIH w/tbg to 3034'. Pump 10 BW down tbg. Cmt plug #1 3034-2307'. Pump 20 sx Cl "B" neat w/2% calcium chloride. Displace w/4 BW. WOC. TIH, tag cmt @ 2647'. Cmt plug #2 2647-2130'. Pump 14 sx Cl "B" neat cmt, displ w/3.5 BW. TOO. 06-18-92 Attempt to PT csg, would not hold. TIH, tag TOC @ 2330'. Pump to 2130'. Perf 2 holes. Set cmt ret @ 996'. Cmt plug #3 w/19 sx Cl "B" neat cmt, squeeze 190 sx below ret. Displace w/1.5 BW. Sting out of ret, dump 3 sx on top of ret. TOO. TIH, perf 2 holes @ 880'. Set cmt ret @ 778'. Cmt plug #4 w/59 sx Cl "B" neat cmt, squeezed 40 sx under ret. Press to 1200 psig. Sting out ret. Spot 19 sx on top of ret. Displ w/1 BW. TOO. LD. Pump wiper plug w/1 BW down 2 7/8" csg. TIH, tag w/wireline @ 336'. Hole in csg @ 336'. Cmt plug #5 w/20 sx Cl "B" neat cmt. Insert wiper plug & displace to 172'. WOC. SDFN. 06-19-92 TIH, tag cmt @ 457'. Unable to circ down 2 7/8" & out bradenhead. Holes from 336-457'. TIH, set cmt ret @ 186'. Cmt plug #6 w/40 sx Class "B" neat, sting out of ret, circ clean. Perf 2 holes @ 170'. Est circ down csg & out bradenhead. Cmt plug # 7 w/66 sx Cl "B" neat cmt, circ 1 bbl. good cmt out bradenhead. Cut off WH. Cmt dry hole marker w/7 sx. Well P&A.

14. I hereby certify that the foregoing is true and correct

Signed [Signature] Title Regulatory Affairs Date 6/22/92

(This space for Federal or State Office use)

APPROVED BY _____ Title _____

CONDITION OF APPROVAL, if any:

Approved as to plugging of the well bore
Liability under bond is retained until
surface restoration is completed.

APPROVED

JUN 25 1992
Date

AREA MANAGER

OPERATOR