

CONFIDENTIAL

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-8161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-8178 Fax: (505) 334-8170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to appropriate
District Office

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

☒ AMENDED REPORT
☒ AS DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-043-21209		² Pool Code 13379	³ Pool Name COUNSELORS GALLUP-DAKOTA
⁴ Property Code 313261	⁵ Property Name GALLO CANYON UNIT P26-2306		⁶ Well Number 02H
⁷ OGRID No. 282327	⁸ Operator Name ENCANA OIL & GAS (USA) INC.		⁹ Elevation 6867.5'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	26	23N	6W		253'	SOUTH	939'	EAST	SANDOVAL

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	36	23N	6W		339'	SOUTH	384'	EAST	SANDOVAL
¹² Dedicated Acres PROJECT AREA 5,120 Acres Sec. 22-26, 34-36 - Undivided Unit Penetrated Spacing Units; S/2 & NW Sec. 36; NE Sec. 35 - 640 Acres			¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No. R-13718-A - 5,120 ACRES (COMMITTED)		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

¹⁸ ¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is
true and complete to the best of my knowledge and belief,
that this organization either owns a working interest
unleased mineral interest in the land including the
posed bottom hole location or has a right to drill this
well at this location pursuant to a contract with an owner
such a mineral or working interest or to a voluntary
pooling agreement or a compulsory pooling order
entered by the division.

Signature Date

Christopher Simmons

Printed Name

Christopher.Simmons@encana.com

E-mail Address


SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this
plat was plotted from field notes of actual surveys made
by me or under my supervision, and that the same is
true and correct to the best of my belief.

APRIL 8, 2015

Date of Survey


Signature and Seal of Professional Surveyor:



DENIED

LAT. 36.189394° N (NAD83)
LONG. 107.430181° W (NAD83)
LAT. 36.189380° N (NAD27)
LONG. 107.429577° W (NAD27)

BOTTOM HOLE
LAT. 36.174933° N (NAD83)
LONG. 107.412383° W (NAD83)
LAT. 36.174919° N (NAD27)
LONG. 107.411780° W (NAD27)

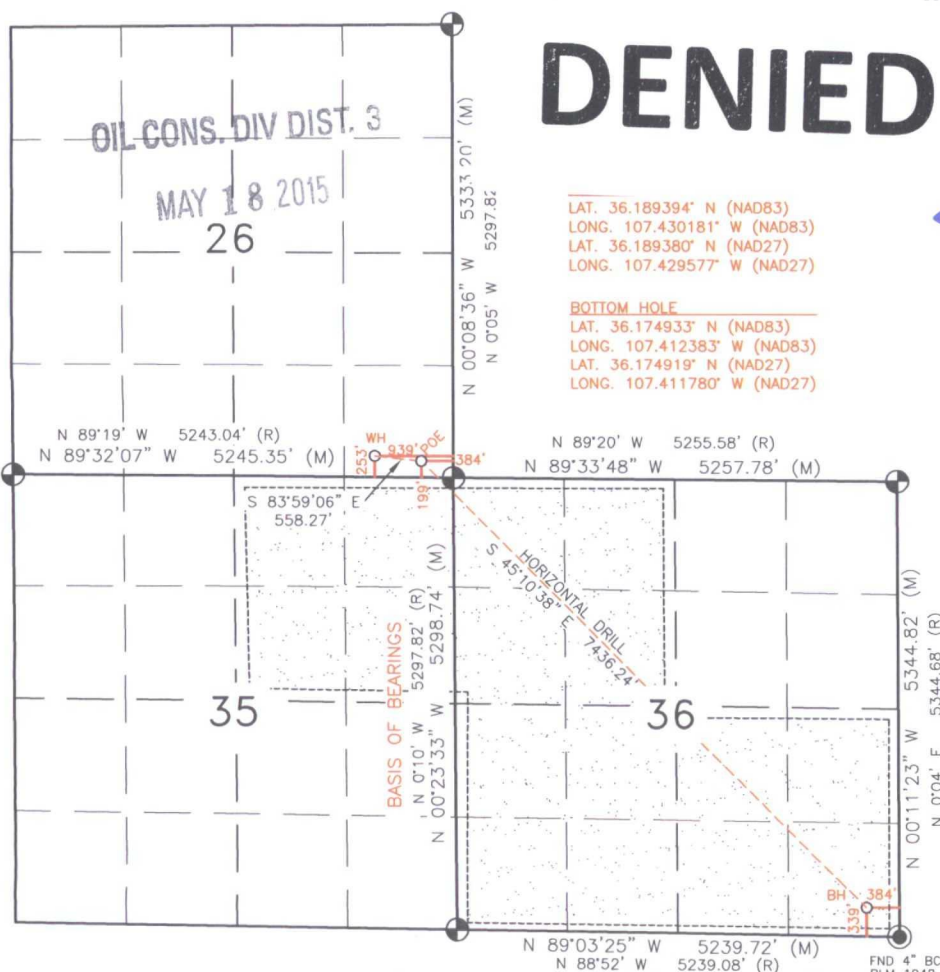

DISTRICT I

1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II

811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1263 Fax: (575) 748-9720

DISTRICT III

1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-6176 Fax: (505) 334-6170

DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to appropriate
District Office

OIL CONSERVATION DIVISION


1220 South St. Francis Dr.
Santa Fe, NM 87505

☐ AMENDED REPORT

☒ AS DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

ENCANA OIL & GAS (USA) INC.
GALLO CANYON UNIT P26-2306 02H

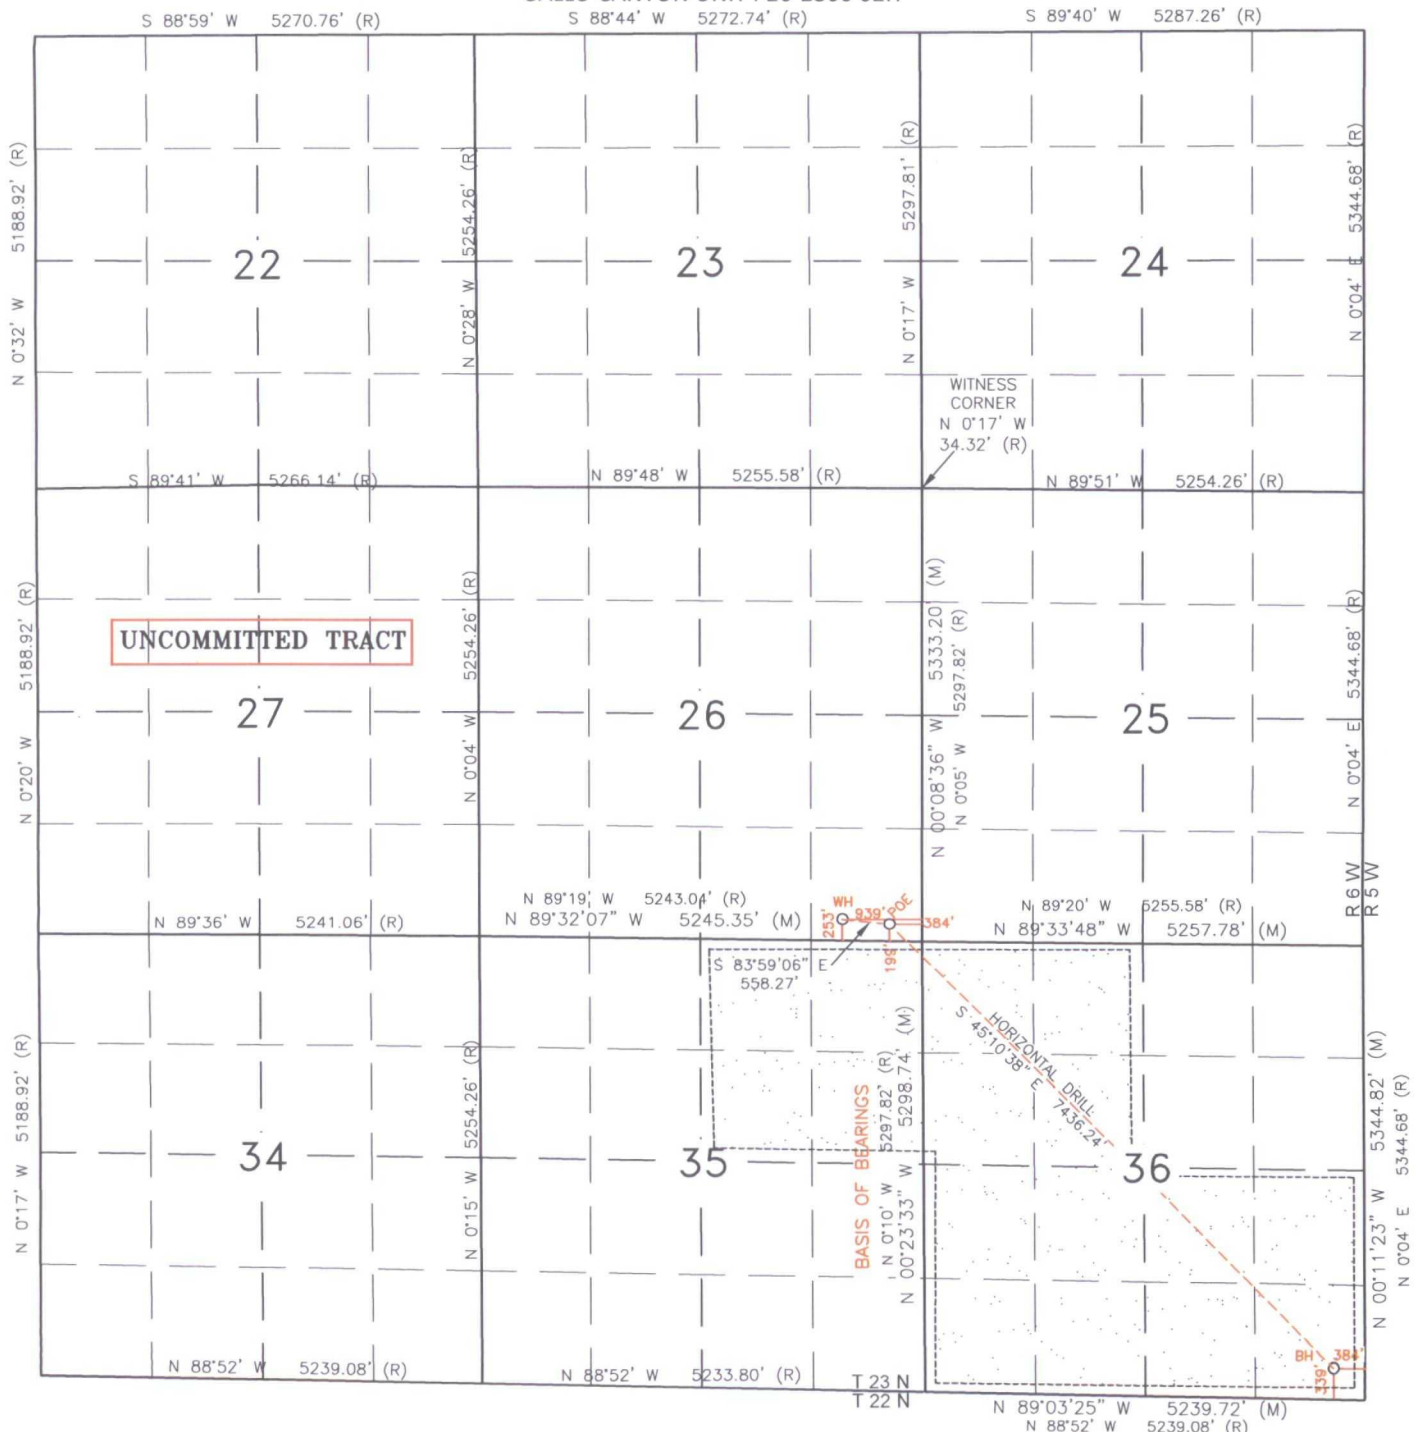**WELL FLAG**


LAT. 36.189561° N (NAD83)
LONG. 107.432061° W (NAD83)
LAT. 36.189547° N (NAD27)
LONG. 107.431458° W (NAD27)

POINT OF ENTRY

LAT. 36.189394° N (NAD83)
LONG. 107.430181° W (NAD83)
LAT. 36.189380° N (NAD27)
LONG. 107.429577° W (NAD27)

BOTTOM HOLE

LAT. 36.174933° N (NAD83)
LONG. 107.412383° W (NAD83)
LAT. 36.174919° N (NAD27)
LONG. 107.411780° W (NAD27)

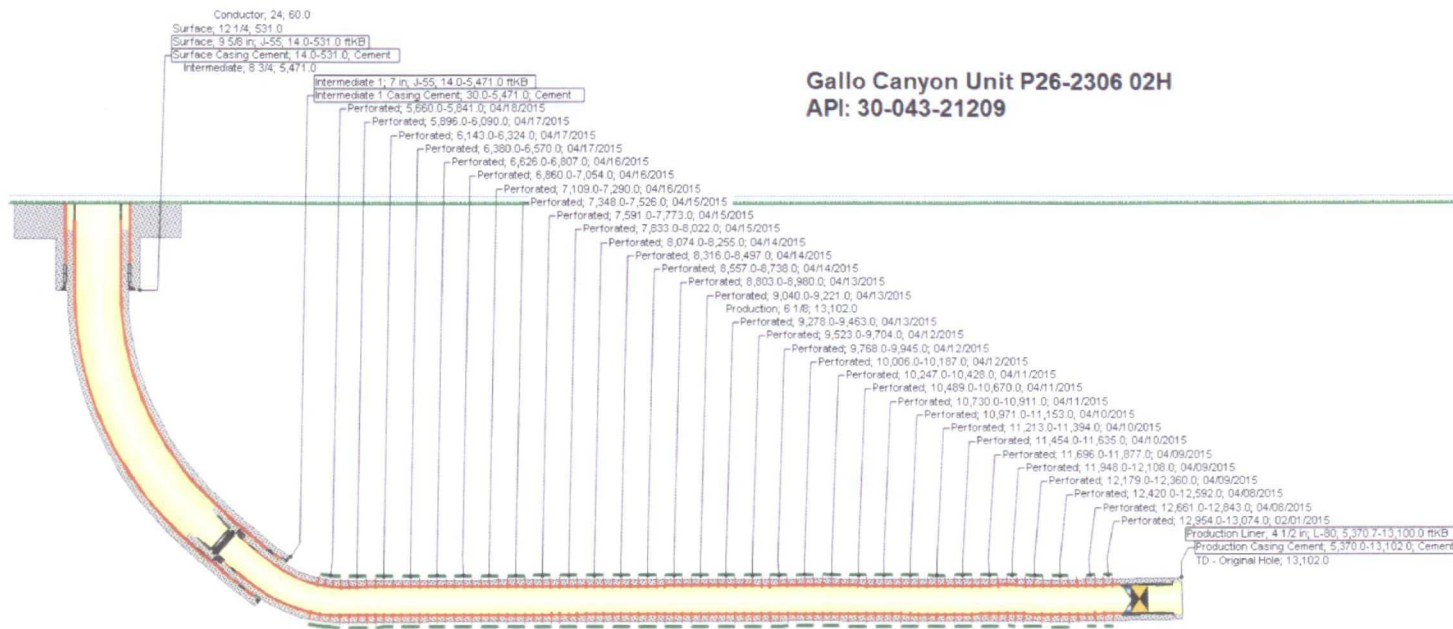

Gallo Canyon Unit P26-2306 02H
API: 30-043-21209

OIL CONS. DIV DIST. 3

MAY 18 2015

DEVIATION SURVEYS
Gallo Canyon Unit P26-2306 02H
30-043-21209

CONFIDENTIAL

MD (Feet)	Inclination (Degree)
372'	0.27
758'	0.32
1074'	0.34
1379'	0.84
1681'	0.44
1984'	0.50
2288'	0.51
2601'	0.18
2917'	0.38
3233'	0.59
3549'	0.69
3864'	0.50
4180'	0.88
4433'	4.40

OIL CONS. DIV DIST. 3

MAY 18 2015

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Cristi BAUER

Cristi Bauer, Regulatory Analyst

5/14/15

Date

ACKNOWLEDGMENT

State of Colorado
City and County of Denver


This instrument was acknowledged before me on this 14th day of MAY, 2015 by Cristi Bauer as Regulatory Analyst of Encana Oil & Gas (USA) Inc., authorized agent for Encana Oil & Gas (USA) Inc., on behalf of said corporation.

In witness whereof, I hereunto set my hand and official seal.

Notary Public:

Rosalie Thim

My Commission Expires: 1/29/18



EnCana Oil & Gas (USA) Inc

Sandoval County, NM

S26-T23N-R6W

GCU P26-2306 02H

Hz

OIL CONS. DIV DIST. 3

MAY 18 2015

Design: Hz

Standard Survey Report

29 December, 2014



Scientific Drilling

Scientific Drilling

Survey Report



Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well GCU P26-2306 02H
Project:	Sandoval County, NM	TVD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Site:	S26-T23N-R6W	MD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Well:	GCU P26-2306 02H	North Reference:	True
Wellbore:	Hz	Survey Calculation Method:	Minimum Curvature
Design:	Hz	Database:	EDM 5000.1 Single User Db

Project	Sandoval County, NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Central Zone		

Site	S26-T23N-R6W				
Site Position:		Northing:	1,890,389.95 usft	Latitude:	36.1895580
From:	Lat/Long	Easting:	1,291,581.79 usft	Longitude:	-107.4321730
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence:	-0.70 °

Well	GCU P26-2306 02H					
Well Position	+N/-S	0.00 ft	Northing:	1,890,392.87 usft	Latitude:	36.1895670
	+E/-W	0.00 ft	Easting:	1,291,611.34 usft	Longitude:	-107.4320730
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	6,872.00 ft

Wellbore	Hz				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2014	12/12/2014	9.35	62.98	50,021

Design	Hz				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00	132.30	

Survey Program		Date	12/29/2014	
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
182.00	13,102.00	Survey #1 (Hz)	SDI MWD	SDI MWD - Standard ver 1.0.1

Survey										
	Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	182.00	0.34	119.57	182.00	-0.27	0.47	0.53	0.19	0.19	0.00
	246.00	0.20	172.44	246.00	-0.47	0.65	0.80	0.42	-0.22	82.61
	309.00	0.31	183.55	309.00	-0.75	0.65	0.99	0.19	0.17	17.63
	372.00	0.27	181.37	372.00	-1.07	0.64	1.19	0.07	-0.06	-3.46
	436.00	0.32	152.38	436.00	-1.38	0.72	1.46	0.24	0.08	-45.30
	568.00	0.12	173.32	568.00	-1.84	0.91	1.91	0.16	-0.15	15.86
	632.00	0.29	186.62	631.99	-2.07	0.89	2.05	0.27	0.27	20.78
	695.00	0.05	305.03	694.99	-2.21	0.85	2.12	0.50	-0.38	187.95
	758.00	0.32	224.52	757.99	-2.32	0.71	2.09	0.50	0.43	-127.79

Scientific Drilling

Survey Report



Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well GCU P26-2306 02H
Project:	Sandoval County, NM	TVD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Site:	S26-T23N-R6W	MD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Well:	GCU P26-2306 02H	North Reference:	True
Wellbore:	Hz	Survey Calculation Method:	Minimum Curvature
Design:	Hz	Database:	EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
821.00	0.46	220.35	820.99	-2.64	0.42	2.09	0.23	0.22	-6.62
884.00	0.26	246.84	883.99	-2.89	0.13	2.04	0.41	-0.32	42.05
948.00	0.30	263.27	947.99	-2.97	-0.17	1.87	0.14	0.06	25.67
1,011.00	0.53	228.39	1,010.99	-3.18	-0.56	1.73	0.53	0.37	-55.37
1,074.00	0.34	271.49	1,073.99	-3.37	-0.96	1.56	0.58	-0.30	68.41
1,137.00	0.34	232.11	1,136.99	-3.48	-1.29	1.38	0.36	0.00	-62.51
1,199.00	0.63	229.00	1,198.98	-3.81	-1.70	1.31	0.47	0.47	-5.02
1,259.00	0.75	229.15	1,258.98	-4.29	-2.24	1.23	0.20	0.20	0.25
1,319.00	0.27	288.38	1,318.98	-4.50	-2.67	1.05	1.09	-0.80	98.72
1,379.00	0.84	338.33	1,378.97	-4.05	-2.97	0.53	1.16	0.95	83.25
1,439.00	0.62	323.51	1,438.97	-3.38	-3.33	-0.19	0.48	-0.37	-24.70
1,500.00	0.20	115.06	1,499.97	-3.16	-3.43	-0.41	1.31	-0.69	248.44
1,560.00	0.09	33.43	1,559.97	-3.16	-3.31	-0.32	0.35	-0.18	-136.05
1,621.00	0.39	234.33	1,620.97	-3.24	-3.45	-0.37	0.78	0.49	-260.82
1,681.00	0.44	230.09	1,680.97	-3.51	-3.79	-0.44	0.10	0.08	-7.07
1,742.00	0.34	206.70	1,741.97	-3.82	-4.05	-0.43	0.30	-0.16	-38.34
1,802.00	0.51	39.99	1,801.96	-3.77	-3.96	-0.39	1.41	0.28	-277.85
1,863.00	0.77	47.50	1,862.96	-3.29	-3.48	-0.36	0.45	0.43	12.31
1,924.00	0.84	43.45	1,923.95	-2.69	-2.87	-0.32	0.15	0.11	-6.64
1,984.00	0.50	53.00	1,983.95	-2.21	-2.36	-0.26	0.59	-0.57	15.92
2,045.00	0.69	19.42	2,044.95	-1.70	-2.03	-0.35	0.64	0.31	-55.05
2,105.00	0.44	42.47	2,104.94	-1.19	-1.75	-0.49	0.56	-0.42	38.42
2,166.00	0.57	31.61	2,165.94	-0.76	-1.43	-0.55	0.26	0.21	-17.80
2,227.00	0.63	26.19	2,226.94	-0.20	-1.13	-0.70	0.14	0.10	-8.89
2,288.00	0.51	30.94	2,287.94	0.33	-0.84	-0.84	0.21	-0.20	7.79
2,348.00	0.44	33.57	2,347.93	0.75	-0.58	-0.93	0.12	-0.12	4.38
2,411.00	0.29	339.67	2,410.93	1.10	-0.50	-1.11	0.57	-0.24	-85.56
2,474.00	0.26	311.95	2,473.93	1.35	-0.66	-1.39	0.21	-0.05	-44.00
2,537.00	0.24	126.24	2,536.93	1.36	-0.66	-1.41	0.79	-0.03	276.65
2,601.00	0.18	167.95	2,600.93	1.19	-0.53	-1.19	0.25	-0.09	65.17
2,664.00	0.47	112.53	2,663.93	0.99	-0.27	-0.87	0.63	0.46	-87.97
2,727.00	0.44	76.65	2,726.93	0.95	0.20	-0.49	0.45	-0.05	-56.95
2,790.00	0.63	117.82	2,789.93	0.84	0.75	-0.02	0.66	0.30	65.35
2,854.00	0.63	117.16	2,853.92	0.52	1.37	0.66	0.01	0.00	-1.03
2,917.00	0.38	84.85	2,916.92	0.38	1.89	1.14	0.59	-0.40	-51.29
2,980.00	0.42	140.95	2,979.92	0.22	2.24	1.51	0.60	0.06	89.05
3,043.00	0.66	141.62	3,042.92	-0.25	2.61	2.10	0.38	0.38	1.06
3,107.00	0.59	156.76	3,106.91	-0.84	2.97	2.76	0.28	-0.11	23.66
3,170.00	0.50	151.75	3,169.91	-1.38	3.23	3.31	0.16	-0.14	-7.95
3,233.00	0.59	177.02	3,232.91	-1.94	3.37	3.80	0.40	0.14	40.11
3,296.00	0.62	175.89	3,295.90	-2.61	3.42	4.28	0.05	0.05	-1.79
3,359.00	0.58	171.85	3,358.90	-3.26	3.49	4.77	0.09	-0.06	-6.41
3,423.00	0.47	246.65	3,422.90	-3.69	3.29	4.92	1.01	-0.17	116.88
3,486.00	0.79	289.46	3,485.89	-3.65	2.64	4.41	0.87	0.51	67.95

Scientific Drilling

Survey Report



Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well GCU P26-2306 02H
Project:	Sandoval County, NM	TVD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Site:	S26-T23N-R6W	MD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Well:	GCU P26-2306 02H	North Reference:	True
Wellbore:	Hz	Survey Calculation Method:	Minimum Curvature
Design:	Hz	Database:	EDM 5000.1 Single User Db

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
3,549.00	0.69	275.20	3,548.89	-3.47	1.86	3.71	0.33	-0.16	-22.63	
3,612.00	0.61	289.73	3,611.88	-3.32	1.16	3.09	0.29	-0.13	23.06	
3,675.00	0.79	273.05	3,674.88	-3.18	0.41	2.45	0.43	0.29	-26.48	
3,738.00	0.51	255.85	3,737.88	-3.23	-0.29	1.96	0.54	-0.44	-27.30	
3,801.00	0.60	285.37	3,800.87	-3.21	-0.88	1.51	0.47	0.14	46.86	
3,864.00	0.50	254.24	3,863.87	-3.20	-1.46	1.07	0.49	-0.16	-49.41	
3,927.00	0.64	279.99	3,926.87	-3.21	-2.08	0.63	0.46	0.22	40.87	
3,991.00	0.94	267.95	3,990.86	-3.17	-2.95	-0.05	0.53	0.47	-18.81	
4,054.00	0.88	250.16	4,053.85	-3.35	-3.92	-0.65	0.46	-0.10	-28.24	
4,117.00	0.88	258.32	4,116.85	-3.61	-4.85	-1.16	0.20	0.00	12.95	
4,180.00	0.88	260.07	4,179.84	-3.79	-5.80	-1.74	0.04	0.00	2.78	
4,243.00	1.14	260.89	4,242.83	-3.98	-6.90	-2.43	0.41	0.41	1.30	
4,307.00	1.08	248.06	4,306.82	-4.30	-8.09	-3.09	0.40	-0.09	-20.05	
4,370.00	0.70	313.64	4,369.81	-4.26	-8.92	-3.73	1.61	-0.60	104.10	
4,401.00	2.05	18.29	4,400.80	-3.60	-8.88	-4.14	6.00	4.35	208.55	
4,433.00	4.40	25.87	4,432.75	-1.95	-8.16	-4.72	7.45	7.34	23.69	
4,464.00	7.18	24.62	4,463.59	0.88	-6.84	-5.65	8.98	8.97	-4.03	
4,496.00	9.95	21.96	4,495.23	5.26	-4.97	-7.22	8.74	8.66	-8.31	
4,528.00	12.51	23.03	4,526.61	11.02	-2.58	-9.32	8.03	8.00	3.34	
4,559.00	15.11	24.09	4,556.71	17.80	0.38	-11.69	8.43	8.39	3.42	
4,591.00	17.37	20.70	4,587.44	26.07	3.77	-14.76	7.66	7.06	-10.59	
4,622.00	19.70	18.11	4,616.83	35.37	7.04	-18.60	7.97	7.52	-8.35	
4,654.00	22.10	18.31	4,646.72	46.21	10.60	-23.26	7.50	7.50	0.63	
4,685.00	24.34	20.03	4,675.21	57.75	14.62	-28.05	7.55	7.23	5.55	
4,717.00	24.94	25.40	4,704.30	70.04	19.78	-32.51	7.24	1.88	16.78	
4,749.00	25.52	32.43	4,733.25	81.96	26.37	-35.66	9.53	1.81	21.97	
4,780.00	25.62	39.69	4,761.22	92.76	34.23	-37.11	10.11	0.32	23.42	
4,812.00	26.02	46.97	4,790.03	102.87	43.78	-36.85	9.98	1.25	22.75	
4,843.00	26.04	54.65	4,817.90	111.45	54.31	-34.84	10.87	0.06	24.77	
4,875.00	26.13	61.57	4,846.64	118.87	66.24	-31.02	9.51	0.28	21.63	
4,906.00	26.13	69.28	4,874.48	124.54	78.63	-25.66	10.95	0.00	24.87	
4,938.00	26.66	75.05	4,903.15	128.88	92.16	-18.58	8.18	1.66	18.03	
4,970.00	27.88	80.76	4,931.60	131.94	106.48	-10.04	9.02	3.81	17.84	
5,001.00	29.92	83.59	4,958.74	133.96	121.32	-0.43	7.92	6.58	9.13	
5,033.00	32.11	86.43	4,986.16	135.39	137.74	10.76	8.23	6.84	8.88	
5,064.00	32.90	90.94	5,012.31	135.76	154.39	22.81	8.22	2.55	14.55	
5,096.00	33.55	96.18	5,039.09	134.67	171.87	36.48	9.20	2.03	16.38	
5,128.00	34.98	100.06	5,065.53	132.11	189.70	51.39	8.16	4.47	12.13	
5,159.00	35.77	104.56	5,090.82	128.28	207.22	66.92	8.78	2.55	14.52	
5,191.00	37.09	107.67	5,116.56	123.00	225.47	83.97	7.09	4.13	9.72	
5,222.00	39.30	109.42	5,140.93	116.90	243.64	101.52	7.94	7.13	5.65	
5,254.00	41.40	110.53	5,165.31	109.82	263.10	120.68	6.94	6.56	3.47	
5,285.00	43.46	112.88	5,188.19	102.07	282.53	140.26	8.38	6.65	7.58	

Scientific Drilling

Survey Report



Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well GCU P26-2306 02H
Project:	Sandoval County, NM	TVD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Site:	S26-T23N-R6W	MD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Well:	GCU P26-2306 02H	North Reference:	True
Wellbore:	Hz	Survey Calculation Method:	Minimum Curvature
Design:	Hz	Database:	EDM 5000.1 Single User Db

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,317.00	45.68	114.92	5,210.99	92.97	303.05	161.57	8.25	6.94	6.38
5,349.00	48.43	115.27	5,232.79	83.04	324.26	183.94	8.63	8.59	1.09
5,380.00	51.07	114.96	5,252.82	73.00	345.69	206.55	8.55	8.52	-1.00
5,412.00	53.76	114.98	5,272.33	62.29	368.67	230.75	8.41	8.41	0.06
5,443.00	55.61	117.27	5,290.26	51.15	391.38	255.04	8.48	5.97	7.39
5,475.00	58.21	119.92	5,307.73	38.31	414.91	281.08	10.68	8.13	8.28
5,506.00	61.69	121.51	5,323.25	24.60	437.97	307.37	12.07	11.23	5.13
5,526.00	63.50	122.67	5,332.45	15.17	453.01	324.84	10.41	9.05	5.80
5,541.00	65.01	123.60	5,338.97	7.79	464.32	338.18	11.51	10.07	6.20
5,572.00	68.56	124.86	5,351.19	-8.24	487.87	366.38	12.05	11.45	4.06
5,604.00	71.41	126.08	5,362.14	-25.69	512.35	396.23	9.60	8.91	3.81
5,635.00	74.93	127.37	5,371.11	-43.43	536.13	425.76	12.03	11.35	4.16
5,667.00	78.30	129.14	5,378.52	-62.70	560.57	456.81	11.83	10.53	5.53
5,699.00	82.01	130.35	5,383.99	-82.86	584.81	488.30	12.18	11.59	3.78
5,730.00	84.51	131.89	5,387.63	-103.11	607.99	519.07	9.45	8.06	4.97
5,762.00	86.17	132.39	5,390.23	-124.50	631.64	550.97	5.42	5.19	1.56
5,794.00	86.35	133.45	5,392.32	-146.25	655.03	582.90	3.35	0.56	3.31
5,815.75	87.59	134.05	5,393.47	-161.27	670.72	604.61	6.33	5.70	2.76
5,857.00	89.93	135.18	5,394.36	-190.23	700.07	645.81	6.30	5.67	2.74
5,920.00	90.81	134.78	5,393.95	-234.76	744.63	708.74	1.53	1.40	-0.63
5,983.00	91.72	134.64	5,392.56	-279.07	789.39	771.67	1.46	1.44	-0.22
6,046.00	91.92	135.02	5,390.56	-323.46	834.05	834.58	0.68	0.32	0.60
6,110.00	90.47	135.83	5,389.23	-369.04	878.96	898.46	2.60	-2.27	1.27
6,173.00	90.03	135.40	5,388.95	-414.06	923.02	961.36	0.98	-0.70	-0.68
6,236.00	89.83	134.15	5,389.03	-458.44	967.74	1,024.30	2.01	-0.32	-1.98
6,299.00	90.44	133.60	5,388.88	-502.10	1,013.16	1,087.27	1.30	0.97	-0.87
6,362.00	89.97	133.33	5,388.65	-545.44	1,058.88	1,150.26	0.86	-0.75	-0.43
6,426.00	88.55	135.09	5,389.48	-590.06	1,104.75	1,214.21	3.53	-2.22	2.75
6,489.00	88.89	135.65	5,390.89	-634.88	1,149.00	1,277.11	1.04	0.54	0.89
6,552.00	89.76	135.25	5,391.63	-679.77	1,193.19	1,340.01	1.52	1.38	-0.63
6,616.00	90.94	135.63	5,391.24	-725.37	1,238.10	1,403.91	1.94	1.84	0.59
6,679.00	90.24	136.57	5,390.59	-770.76	1,281.78	1,466.77	1.86	-1.11	1.49
6,742.00	90.74	136.47	5,390.05	-816.48	1,325.13	1,529.59	0.81	0.79	-0.16
6,805.00	89.76	136.49	5,389.78	-862.16	1,368.51	1,592.43	1.56	-1.56	0.03
6,868.00	90.03	136.05	5,389.89	-907.68	1,412.06	1,655.27	0.82	0.43	-0.70
6,932.00	90.81	135.35	5,389.42	-953.48	1,456.75	1,719.16	1.64	1.22	-1.09
6,995.00	90.00	135.13	5,388.98	-998.22	1,501.11	1,782.07	1.33	-1.29	-0.35
7,058.00	90.57	135.66	5,388.66	-1,043.07	1,545.35	1,844.98	1.24	0.90	0.84
7,121.00	89.83	136.50	5,388.44	-1,088.45	1,589.05	1,907.84	1.78	-1.17	1.33
7,184.00	90.54	136.40	5,388.24	-1,134.11	1,632.46	1,970.68	1.14	1.13	-0.16
7,247.00	89.83	135.93	5,388.04	-1,179.55	1,676.09	2,033.53	1.35	-1.13	-0.75
7,311.00	90.37	135.53	5,387.93	-1,225.38	1,720.76	2,097.42	1.05	0.84	-0.63
7,374.00	89.70	134.75	5,387.89	-1,270.04	1,765.20	2,160.34	1.63	-1.06	-1.24

Scientific Drilling

Survey Report



Company: EnCana Oil & Gas (USA) Inc
Project: Sandoval County, NM
Site: S26-T23N-R6W
Well: GCU P26-2306 02H
Wellbore: Hz
Design: Hz

Local Co-ordinate Reference: Well GCU P26-2306 02H
TVD Reference: GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
MD Reference: GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
7,437.00	89.97	134.39	5,388.07	-1,314.25	1,810.08	2,223.29	0.71	0.43	-0.57
7,500.00	90.00	134.90	5,388.09	-1,358.52	1,854.90	2,286.24	0.81	0.05	0.81
7,564.00	90.71	134.58	5,387.69	-1,403.57	1,900.36	2,350.18	1.22	1.11	-0.50
7,627.00	89.80	134.44	5,387.41	-1,447.73	1,945.29	2,413.13	1.46	-1.44	-0.22
7,690.00	90.10	133.92	5,387.46	-1,491.64	1,990.47	2,476.09	0.95	0.48	-0.83
7,753.00	91.08	133.30	5,386.81	-1,535.09	2,036.08	2,539.07	1.84	1.56	-0.98
7,816.00	89.73	133.16	5,386.37	-1,578.24	2,081.98	2,602.06	2.15	-2.14	-0.22
7,880.00	89.39	134.49	5,386.86	-1,622.55	2,128.15	2,666.04	2.14	-0.53	2.08
7,943.00	90.44	133.83	5,386.95	-1,666.44	2,173.35	2,729.00	1.97	1.67	-1.05
8,006.00	90.24	134.87	5,386.58	-1,710.48	2,218.40	2,791.96	1.68	-0.32	1.65
8,069.00	90.34	135.65	5,386.26	-1,755.23	2,262.74	2,854.87	1.25	0.16	1.24
8,133.00	90.91	135.00	5,385.56	-1,800.73	2,307.73	2,918.78	1.35	0.89	-1.02
8,196.00	90.48	134.95	5,384.80	-1,845.26	2,352.30	2,981.71	0.69	-0.68	-0.08
8,259.00	89.83	134.98	5,384.63	-1,889.78	2,396.87	3,044.64	1.03	-1.03	0.05
8,322.00	90.24	134.94	5,384.59	-1,934.29	2,441.45	3,107.57	0.65	0.65	-0.06
8,386.00	89.63	135.36	5,384.66	-1,979.67	2,486.59	3,171.49	1.16	-0.95	0.66
8,449.00	90.51	135.01	5,384.59	-2,024.36	2,530.99	3,234.41	1.50	1.40	-0.56
8,512.00	90.61	136.13	5,383.97	-2,069.34	2,575.09	3,297.30	1.78	0.16	1.78
8,575.00	89.70	135.98	5,383.80	-2,114.70	2,618.81	3,360.17	1.46	-1.44	-0.24
8,638.00	90.37	135.56	5,383.76	-2,159.85	2,662.75	3,423.05	1.26	1.06	-0.67
8,702.00	89.87	135.16	5,383.63	-2,205.38	2,707.72	3,486.96	1.00	-0.78	-0.63
8,765.00	90.40	134.28	5,383.48	-2,249.71	2,752.49	3,549.90	1.63	0.84	-1.40
8,825.00	90.47	133.69	5,383.02	-2,291.38	2,795.66	3,609.88	0.99	0.12	-0.98
8,885.00	90.07	132.96	5,382.74	-2,332.55	2,839.30	3,669.87	1.39	-0.67	-1.22
8,946.00	90.10	132.65	5,382.65	-2,374.00	2,884.06	3,730.86	0.51	0.05	-0.51
9,006.00	89.87	133.25	5,382.67	-2,414.88	2,927.97	3,790.86	1.07	-0.38	1.00
9,066.00	90.20	133.74	5,382.63	-2,456.18	2,971.50	3,850.85	0.98	0.55	0.82
9,126.00	89.63	134.09	5,382.72	-2,497.79	3,014.72	3,910.82	1.11	-0.95	0.58
9,187.00	89.73	135.01	5,383.06	-2,540.58	3,058.19	3,971.77	1.52	0.16	1.51
9,247.00	90.00	135.31	5,383.20	-2,583.13	3,100.50	4,031.70	0.67	0.45	0.50
9,263.00	90.04	135.47	5,383.19	-2,594.52	3,111.74	4,047.67	1.03	0.25	1.00
9,323.00	89.83	136.11	5,383.26	-2,637.52	3,153.57	4,107.56	1.12	-0.35	1.07
9,383.00	89.73	135.04	5,383.49	-2,680.37	3,195.57	4,167.46	1.79	-0.17	-1.78
9,444.00	90.03	134.05	5,383.62	-2,723.16	3,239.04	4,228.42	1.70	0.49	-1.62
9,504.00	90.24	134.45	5,383.48	-2,765.03	3,282.02	4,288.38	0.75	0.35	0.67
9,564.00	89.83	136.49	5,383.44	-2,807.80	3,324.10	4,348.29	3.47	-0.68	3.40
9,625.00	89.13	137.93	5,384.00	-2,852.56	3,365.53	4,409.06	2.62	-1.15	2.36
9,685.00	89.19	137.60	5,384.88	-2,896.98	3,405.86	4,468.78	0.56	0.10	-0.55
9,746.00	90.44	137.27	5,385.07	-2,941.91	3,447.12	4,529.53	2.12	2.05	-0.54
9,806.00	90.57	136.69	5,384.54	-2,985.77	3,488.05	4,589.33	0.99	0.22	-0.97
9,867.00	91.04	135.35	5,383.69	-3,029.66	3,530.41	4,650.19	2.33	0.77	-2.20
9,928.00	91.51	134.60	5,382.33	-3,072.76	3,573.55	4,711.11	1.45	0.77	-1.23
9,988.00	90.91	135.97	5,381.06	-3,115.39	3,615.75	4,771.02	2.49	-1.00	2.28
10,049.00	89.96	135.91	5,380.60	-3,159.22	3,658.17	4,831.89	1.56	-1.56	-0.10

Scientific Drilling
Survey Report



Company:	EnCana Oil & Gas (USA) Inc	Local Co-ordinate Reference:	Well GCU P26-2306 02H
Project:	Sandoval County, NM	TVD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Site:	S26-T23N-R6W	MD Reference:	GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
Well:	GCU P26-2306 02H	North Reference:	True
Wellbore:	Hz	Survey Calculation Method:	Minimum Curvature
Design:	Hz	Database:	EDM 5000.1 Single User Db

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
10,109.00	90.00	134.64	5,380.62	-3,201.85	3,700.39	4,891.81	2.12	0.07	-2.12	
10,170.00	90.37	133.46	5,380.42	-3,244.26	3,744.23	4,952.78	2.03	0.61	-1.93	
10,231.00	90.37	132.31	5,380.03	-3,285.78	3,788.93	5,013.77	1.89	0.00	-1.89	
10,292.00	89.90	133.89	5,379.89	-3,327.45	3,833.47	5,074.76	2.70	-0.77	2.59	
10,352.00	88.39	135.22	5,380.78	-3,369.54	3,876.21	5,134.71	3.35	-2.52	2.22	
10,414.00	88.18	134.02	5,382.64	-3,413.07	3,920.32	5,196.63	1.96	-0.34	-1.94	
10,475.00	88.76	134.56	5,384.27	-3,455.65	3,963.97	5,257.57	1.30	0.95	0.89	
10,536.00	89.46	135.56	5,385.21	-3,498.82	4,007.05	5,318.49	2.00	1.15	1.64	
10,596.00	89.80	135.90	5,385.60	-3,541.79	4,048.94	5,378.38	0.80	0.57	0.57	
10,657.00	89.76	136.44	5,385.84	-3,585.79	4,091.18	5,439.24	0.89	-0.07	0.89	
10,718.00	90.20	137.75	5,385.86	-3,630.47	4,132.71	5,500.03	2.27	0.72	2.15	
10,778.00	90.71	137.44	5,385.38	-3,674.77	4,173.17	5,559.77	0.99	0.85	-0.52	
10,839.00	90.47	137.40	5,384.75	-3,719.69	4,214.44	5,620.52	0.40	-0.39	-0.07	
10,900.00	89.46	137.73	5,384.79	-3,764.71	4,255.60	5,681.26	1.74	-1.66	0.54	
10,960.00	89.29	137.33	5,385.44	-3,808.96	4,296.11	5,741.01	0.72	-0.28	-0.67	
11,022.00	89.80	137.03	5,385.94	-3,854.44	4,338.25	5,802.78	0.95	0.82	-0.48	
11,083.00	90.27	137.94	5,385.90	-3,899.40	4,379.47	5,863.53	1.68	0.77	1.49	
11,143.00	89.97	138.06	5,385.77	-3,943.99	4,419.62	5,923.24	0.54	-0.50	0.20	
11,204.00	89.63	136.88	5,385.99	-3,988.94	4,460.85	5,983.99	2.01	-0.56	-1.93	
11,265.00	89.23	135.37	5,386.59	-4,032.91	4,503.12	6,044.85	2.56	-0.66	-2.48	
11,326.00	89.83	134.32	5,387.09	-4,075.92	4,546.37	6,105.78	1.98	0.98	-1.72	
11,387.00	90.13	134.21	5,387.11	-4,118.50	4,590.06	6,166.75	0.52	0.49	-0.18	
11,448.00	90.13	133.89	5,386.98	-4,160.91	4,633.90	6,227.72	0.52	0.00	-0.52	
11,508.00	90.34	133.64	5,386.73	-4,202.41	4,677.23	6,287.70	0.54	0.35	-0.42	
11,569.00	90.03	133.62	5,386.53	-4,244.50	4,721.38	6,348.68	0.51	-0.51	-0.03	
11,632.00	90.37	133.57	5,386.31	-4,287.94	4,767.01	6,411.67	0.55	0.54	-0.08	
11,695.00	91.38	137.78	5,385.35	-4,333.00	4,811.01	6,474.53	6.87	1.60	6.68	
11,758.00	90.47	137.28	5,384.33	-4,379.46	4,853.54	6,537.26	1.65	-1.44	-0.79	
11,821.00	89.33	136.66	5,384.44	-4,425.51	4,896.53	6,600.05	2.06	-1.81	-0.98	
11,884.00	90.87	137.86	5,384.33	-4,471.78	4,939.29	6,662.81	3.10	2.44	1.90	
11,948.00	91.18	137.21	5,383.19	-4,518.99	4,982.49	6,726.54	1.13	0.48	-1.02	
12,011.00	90.64	137.38	5,382.19	-4,565.28	5,025.21	6,789.29	0.90	-0.86	0.27	
12,074.00	88.59	136.97	5,382.61	-4,611.48	5,068.03	6,852.06	3.32	-3.25	-0.65	
12,137.00	88.08	135.19	5,384.44	-4,656.84	5,111.71	6,914.89	2.94	-0.81	-2.83	
12,200.00	87.68	134.25	5,386.77	-4,701.13	5,156.45	6,977.79	1.62	-0.63	-1.49	
12,264.00	87.68	134.13	5,389.36	-4,745.71	5,202.30	7,041.70	0.19	0.00	-0.19	
12,327.00	88.76	132.85	5,391.32	-4,789.04	5,247.98	7,104.66	2.66	1.71	-2.03	
12,390.00	88.72	132.57	5,392.71	-4,831.77	5,294.26	7,167.64	0.45	-0.06	-0.44	
12,453.00	89.93	132.19	5,393.45	-4,874.23	5,340.80	7,230.63	2.01	1.92	-0.60	
12,517.00	90.10	132.53	5,393.43	-4,917.35	5,388.09	7,294.63	0.59	0.27	0.53	
12,580.00	90.74	132.06	5,392.97	-4,959.74	5,434.69	7,357.63	1.26	1.02	-0.75	
12,643.00	91.48	131.24	5,391.75	-5,001.60	5,481.75	7,420.62	1.75	1.17	-1.30	
12,706.00	91.41	131.15	5,390.16	-5,043.08	5,529.14	7,483.58	0.18	-0.11	-0.14	

Scientific Drilling
Survey Report



Company: EnCana Oil & Gas (USA) Inc
Project: Sandoval County, NM
Site: S26-T23N-R6W
Well: GCU P26-2306 02H
Wellbore: Hz
Design: Hz

Local Co-ordinate Reference: Well GCU P26-2306 02H
TVD Reference: GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
MD Reference: GL 6872' & RKB 15' @ 6887.00ft (Aztec 920)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
12,770.00	92.42	130.91	5,388.02	-5,085.07	5,577.39	7,547.53	1.62	1.58	-0.38
12,833.00	92.19	130.72	5,385.49	-5,126.22	5,625.03	7,610.46	0.47	-0.37	-0.30
12,896.00	92.63	130.71	5,382.84	-5,167.28	5,672.74	7,673.38	0.70	0.70	-0.02
12,959.00	92.39	130.57	5,380.08	-5,208.27	5,720.50	7,736.29	0.44	-0.38	-0.22
13,022.00	92.63	130.13	5,377.32	-5,249.02	5,768.47	7,799.19	0.79	0.38	-0.70
13,054.00	92.66	130.01	5,375.84	-5,269.60	5,792.93	7,831.14	0.39	0.09	-0.38
13,102.00	92.66	130.01	5,373.62	-5,300.42	5,829.66	7,879.05	0.00	0.00	0.00

Checked By: _____ Approved By: _____ Date: _____

CONFIDENTIAL

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3480 Fax: (505) 476-3482

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate
District Office

☐ AMENDED REPORT
☒ AS DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-043-21209		² Pool Code 13379	³ Pool Name COUNSELORS GALLUP-DAKOTA
⁴ Property Code 313261	⁵ Property Name GALLO CANYON UNIT		⁶ Well Number 204H
⁷ OGRID No. 282327			⁸ Elevation 6867.5'

DENIED

UL or lot no.	Section	Township	Range
P	26	23N	6W


Feet from the	East/West line	County
939'	EAST	SANDOVAL

¹¹Bottom Hole Location if Different from Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	36	23N	6W		339'	SOUTH	384'	EAST	SANDOVAL
¹² Dedicated Acres PROJECT AREA 5,120 Acres Sec. 22-26, 34-36 - Undivided Unit Penetrated Spacing Units; S/2 & NW Sec. 36; NE Sec. 35 - 640 Acres				¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No. R-13718-A - 5,120 ACRES (COMMITTED)	

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

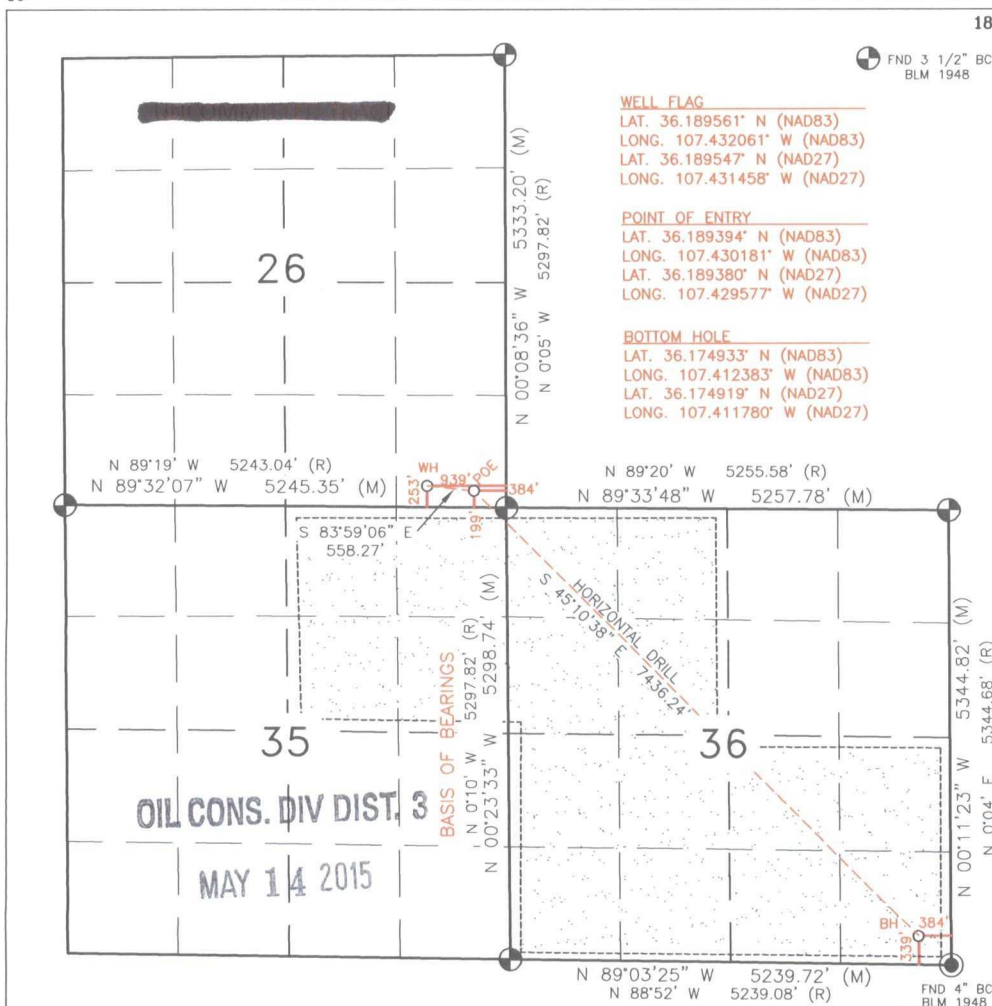

18

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Holly Hill 5/11/15
Signature Date


Holly Hill
Printed Name
Holly.Hill@encana.com
E-mail Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

APRIL 8, 2015

Date of Survey
Signature and Seal of Professional Surveyor:



CONFIDENTIAL

DEVIATION SURVEYS
Gallo Canyon Unit 204H
30-043-21209

MD (Feet)	Inclination (Degree)
372'	0.27
758'	0.32
1074'	0.34
1379'	0.84
1681'	0.44
1984'	0.50
2288'	0.51
2601'	0.18
2917'	0.38
3233'	0.59
3549'	0.69
3864'	0.50
4180'	0.88
4433'	4.40

OIL CONS. DIV DIST. 3

MAY 14 2015

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

Cristi Bauer
Cristi Bauer, Regulatory Analyst

5/11/15
Date

ACKNOWLEDGMENT


State of Colorado
City and County of Denver


This instrument was acknowledged before me on this 11th day of May, 2015 by Cristi Bauer as Regulatory Analyst of Encana Oil & Gas (USA) Inc., authorized agent for Encana Oil & Gas (USA) Inc., on behalf of said corporation.

In witness whereof, I hereunto set my hand and official seal.

Notary Public Rosalie Thim

My Commission Expires: 1/29/18



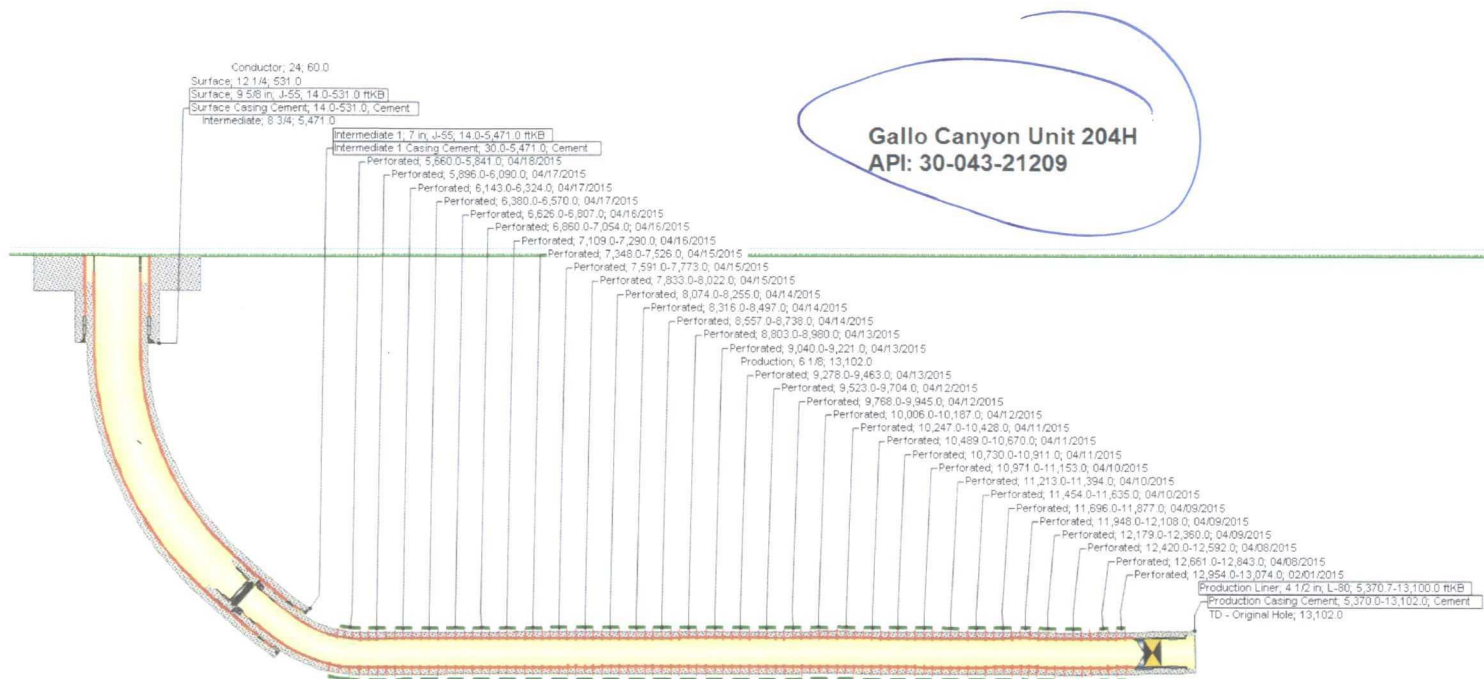

OIL CONS. DIV DIST. 3

MAY 14 2015

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Encana Oil & Gas (USA) Inc. 370 17 th Street, Suite 1700 Denver, Colorado 80202		² OGRID Number 282327
		³ Reason for Filing Code/ Effective Date New Well. 5/9/2015
⁴ API Number 30-043-21209	⁵ Pool Name Counselors Gallup-Dakota	⁶ Pool Code 13379
⁷ Property Code 313261	⁸ Property Name Gallo Canyon Unit	⁹ Well Number 204H

II. ¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
P	26	23N	6W		253'	South	939'	East	Sandoval

¹¹ Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	36	23N	6W		339'	South	384'	East	Sandoval

¹² Lse Code NMNM 17009	¹³ Producing Method Code P	¹⁴ Gas Connection Date 5/26/2015	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date
--------------------------------------	---	---	-----------------------------------	------------------------------------	-------------------------------------

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
248440	Western Refining Company, LP 6500 Townbridge Drive, El Paso, TX 79905	O
272091	NGL Crude Logistics LLC	O
151618		G

OIL CONS. DIV DIST. 3
MAY 14 2015

DENIED

IV. Well Completion Data

²¹ Spud Date 12/13/2014	²² Ready Date 5/9/2015	²³ TD 13,102'	²⁴ PBTD 13,097' Float Collar	²⁵ Perforations 5660'-13,074'	²⁶ DHC, MC N/A
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
12.25"	9.625" 36# J55 LTC	531'	247 sks		
8.75"	7" 26# J55 LTC	5471'	507 sks Lead 397 sks Tail		
6.125"	4.5" 11.6# SB80 LTC	TOL: 5371' 5471'-13,100'	439 sks		
	2.875" 6.5# J55	Will be provided on Subsequent Sundry			

V. Well Test Data

Test Data will be provided on Initial 24 Hour Test Sundry

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: *Cristi Bauer*

Printed name:
Cristi Bauer

Title:
Regulatory Analyst

E-mail Address:
Cristi.Bauer@encana.com

Date:
Phone: 720-876-5867

Approved by:

Title:

Approval Date

OIL CONSERVATION DIVISION

DENIED

BY: Amy H. Vermersch
DATE: 5-14-15 (505) 334-6178 Ext. 113