
UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT  SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.				FORM APPROVED OM BYO. 1004-0137 Exprires: March 31, 2007  5. Lease Septal No. SF-078505  6. If Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE- Other instructions on reverse side.				7. If Unit or CA/Agreement, Name and/or No.	
1. Type of Well Gas Well Other				8. Well Name and No. Seymour 10S  9. API Well No.	
2. Name of Operator Koch Exploration Company, LLC					
Ba Address PO Box 489, Aztec, NM 8'	7410	3b. Phone No. (include area code) 505-334-9111		30-045-32534  10. Field and Pool, or Exploratory Area	
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)				Basin Fruitland Coal	
1095' FNL & 840' FWL S23, T31N, R9W				11. County or Parish, State  San Juan, New Mexico	
12. CHECK	APPROPRIATE BOX(ES) TO	INDICATE NATUR	E OF NOTICE, RE	EPORT, OR C	THER DATA
TYPE OF SUBMISSION	TYPE OF ACTION				
Notice of Intent  ✓ Subsequent Report  ☐ Final Abandonment Notice	Acidize Alter Casing Casing Repair Change Plans Convert to Injection	Deepen Fracture Treat New Construction Plug and Abandon Plug Back	Production (Start/Resume) Reclamation Recomplete Temporarily Abandon Water Disposal		Water Shut-Off Well Integrity Other Spud Well, Surface Casing and Cement
•	eted Operation (clearly state all pertirectionally or recomplete horizontally		•		• •

Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

10/25/05 Spud well. Drilled 12 1/4" hole to 425', ran 9 5/8", 36#, J-55 STC casing, landed @ 413' KB (KB=5.0'). On 10/26/05 Cemented with 298 sks Type III cement plus 3% CaCl, plus 0.25 lb/sk Celloflake, yield 1.38, 433.24 cu. ft. We ran centralizers on all joints. Circulated 28 BBLs good cement to surface. Wait on Cement 8 hours. 10/27/05 Tested BOPs 250# low and 2000# high for 10 minutes each. Tested 9 5/8" casing to 600# for 30 minutes, held O.K. Tagged cement @ 335'.

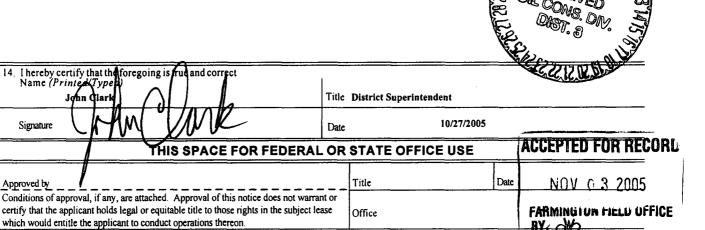

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Name (Printe

Signature

Approved by