

submitted in lieu of Form 3160-5

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

RECEIVED
070 FARMINGTON NM
DEC 28 PM 1 04

1. Type of Well
GAS

2. Name of Operator

**BURLINGTON
RESOURCES**

OIL & GAS COMPANY LP

3. Address & Phone No. of Operator

PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M

305' FSL, 975' FWL, Sec. 26, T-28-N, R-5-W, NMPM Surface

735' FSL, 1593' FEL bottom hole

5. Lease Number
SF-079520-A

6. If Indian, All. or
Tribe Name

7. Unit Agreement Name
San Juan 28-5 Unit

8. Well Name & Number
San Juan 28-5 Unit 81M

9. API Well No.
30-039-29555

10. Field and Pool
Blanco MV/Basin DK

11. County and State
Rio Arriba, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment

Type of Action

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☒ Other

☐ Change of Plans

☐ New Construction


☐ Non-Routine Fracturing

☐ Water Shut off

☐ Conversion to Injection

13. Describe Proposed or Completed Operations

Please see attached revised direction drill plan on the above referenced well, which was verbally approved by Jim Lovato 9/30/05



14. I hereby certify that the foregoing is true and correct.

Signed Frances Sand Title Regulatory Specialist Date 12/20/05
fsb


(This space for Federal or State Office use)

APPROVED BY Adrian Brunley Title Pet. Eng Date 12/30/05

CONDITION OF APPROVAL, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NMOCD




Field: Rio Arriba, NM
Site: Sec. 26 T28N R5W (San Juan 28-5#81M)
Well: San Juan 28-5#81M
Wellpath: ST01
Plan: Plan #2

Burlington Resources

LEGEND
ST01
Plan #2


Sec. 26 T28N, R5W
Rio Arriba, NM
SHL
305' FSL & 975' FWL
BHL
735' FSL & 1393' FWL




Azimuths to Grid North
True North: -0.30°
Magnetic North: 10.09°
Magnetic Field
Strength: 51362at
Dip Angle: 63.58°
Date: 2005-09-16
Model: IGR12005

WELL DETAILS				TARGET DETAILS			
Name	+N/S	+E/W	Northing	Easting	Latitude	Longitude	Shot
San Juan 28-5#81M	0.00	0.00	2047433.21	646283.55	36°37'31.97"N	107°20'01.152"W	N/A
Name	TVD	+N/S	+E/W	Northing	Easting	Latitude	Longitude
28-5#81M BHL	8060.00	440.63	2682.26	2047873.64	646308.80	36°37'37.18"N	107°19'28.21"W

True Vertical Depth [1000ft/in]

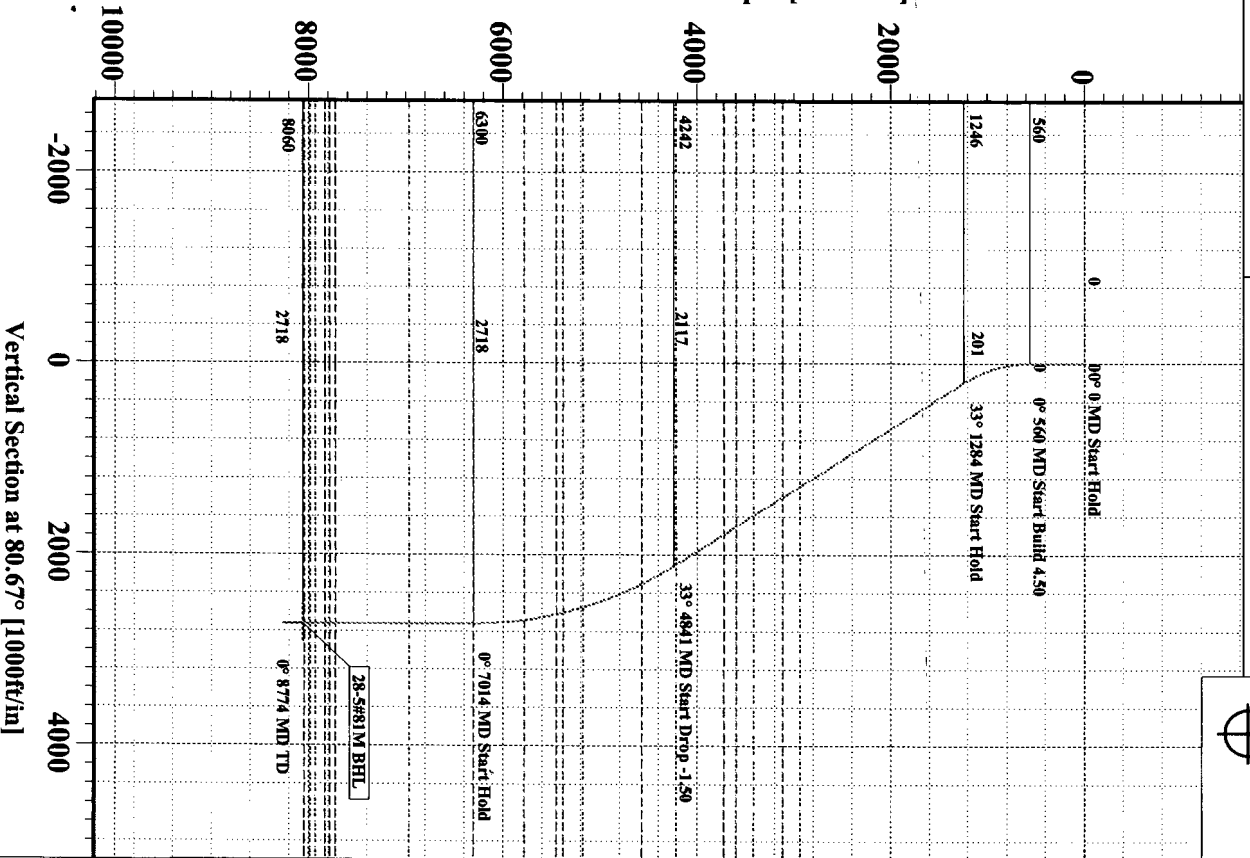

South(-)/North(+) [1000ft/in]

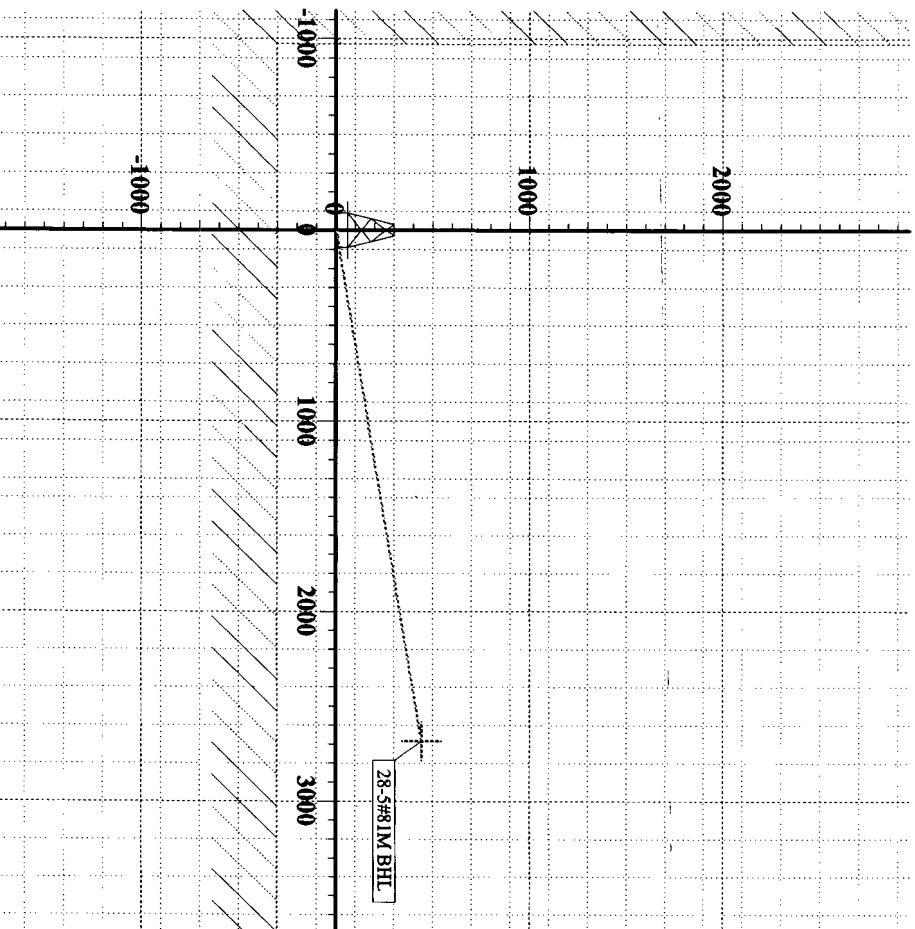

West(-)/East(+) [1000ft/in]

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/S	+E/W	DLeg	TFace	VSec	Target
1	560.00	0.00	0.00	560.00	0.00	0.00	0.00	0.00	0.00	
2	1284.37	32.60	80.67	1245.92	32.51	197.90	4.50	0.00	200.56	
3	4840.89	32.60	80.67	4242.23	343.10	2088.54	0.00	0.00	2116.54	
4	7014.01	0.00	0.00	6300.00	440.63	2682.26	1.50	180.00	2718.21	
5	8774.01	0.00	0.00	8060.00	440.63	2682.26	0.00	0.00	2718.21	28-5#81M BHL



Scientific Drilling Planning Report

Company: Burlington Resources **Date:** 2005-09-26 **Time:** 10:46:29 **Page:** 1
Field: Rio Arriba, NM **Co-ordinate(NE) Reference:** Well: San Juan 28-5#81M, Grid North
Site: Sec. 26 T28N R5W (San Juan 28-5#81M) **Vertical (TVD) Reference:** GL 6733.0
Well: San Juan 28-5#81M **Section (VS) Reference:** Well (0.00N,0.00E,80.67Azi)
Wellpath: ST01 **Plan:** Plan #2

Field: Rio Arriba, NM

United States of America

Map System: US State Plane Coordinate System 1927

Geo Datum: NAD27 (Clarke 1866)

Sys Datum: Mean Sea Level

Map Zone:

New Mexico, Western Zone

Coordinate System:

Well Centre

Geomagnetic Model:

igrf2005

Site: Sec. 26 T28N R5W (San Juan 28-5#81M)

Site Position:

From: Lease Line

Northing:

ft

Latitude:

Easting:

ft

Longitude:

Position Uncertainty: 0.00 ft

North Reference: Grid

Ground Level: 0.00 ft

Grid Convergence: 0.30 deg

Well: San Juan 28-5#81M

Slot Name:

Well Position: +N/-S 0.00 ft **Northing:** 2047433.21 ft **Latitude:** 36 37 32.970 N

+E/-W 0.00 ft **Easting:** 646626.55 ft **Longitude:** 107 20 1.152 W

Position Uncertainty: 0.00 ft

Wellpath: ST01

Drilled From: Surface

Current Datum: GL **Height** 6733.00 ft

Tie-on Depth: 0.00 ft

Magnetic Data: 2005-09-16

Above System Datum: Mean Sea Level

Field Strength: 51362 nT

Declination: 10.39 deg

Vertical Section: Depth From (TVD)

Mag Dip Angle: 63.58 deg

ft

+N/-S

+E/-W

Direction

ft

ft

ft

deg

0.00

0.00

0.00

80.67

Plan: Plan #2

Date Composed: 2005-09-23

Principal: Yes

Version: 1

Tied-to: From Surface

Plan Section Information

MD ft	Incl deg	Azlm deg	TVD ft	+N/-S ft	+E/-W ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
560.00	0.00	0.00	560.00	0.00	0.00	0.00	0.00	0.00	0.00	
1284.37	32.60	80.67	1245.92	32.51	197.90	4.50	4.50	0.00	0.00	
4840.89	32.60	80.67	4242.23	343.10	2088.54	0.00	0.00	0.00	0.00	
7014.01	0.00	0.00	6300.00	440.63	2682.26	1.50	-1.50	0.00	180.00	
8774.01	0.00	0.00	8060.00	440.63	2682.26	0.00	0.00	0.00	0.00	28-5#81M BHL

Section 1 : Start Hold

MD ft	Incl deg	Azlm deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
560.00	0.00	0.00	560.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Section 2 : Start Build 4.50

MD ft	Incl deg	Azlm deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
600.00	1.80	80.67	599.99	0.10	0.62	0.63	4.50	4.50	0.00	0.00
700.00	6.30	80.67	699.72	1.25	7.59	7.69	4.50	4.50	0.00	0.00
800.00	10.80	80.67	798.58	3.66	22.25	22.55	4.50	4.50	0.00	0.00
900.00	15.30	80.67	895.97	7.32	44.53	45.13	4.50	4.50	0.00	0.00
1000.00	19.80	80.67	991.29	12.20	74.28	75.27	4.50	4.50	0.00	0.00
1100.00	24.30	80.67	1083.96	18.29	111.31	112.80	4.50	4.50	0.00	0.00



Scientific Drilling Planning Report

Company: Burlington Resources
Field: Rio Arriba, NM
Site: Sec. 26 T28N R5W (San Juan 28-5#81M)
Well: San Juan 28-5#81M
Wellpath: ST01

Date: 2005-09-26
Co-ordinate(NE) Reference: Well: San Juan 28-5#81M, Grid North
Vertical (TVD) Reference: GL 6733.0
Section (VS) Reference: Well (0.00N,0.00E,80.67Azi)
Plan: Plan #2

Page: 2

Section 2 : Start Build 4.50

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
1200.00	28.80	80.67	1173.39	25.53	155.41	157.49	4.50	4.50	0.00	0.00
1284.37	32.60	80.67	1245.92	32.51	197.90	200.56	4.50	4.50	0.00	0.00

Section 3 : Start Hold

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
1300.00	32.60	80.67	1259.09	33.88	206.21	208.98	0.00	0.00	0.00	0.00
1400.00	32.60	80.67	1343.34	42.61	259.37	262.85	0.00	0.00	0.00	0.00
1500.00	32.60	80.67	1427.59	51.34	312.53	316.72	0.00	0.00	0.00	0.00
1600.00	32.60	80.67	1511.83	60.07	365.69	370.59	0.00	0.00	0.00	0.00
1700.00	32.60	80.67	1596.08	68.81	418.85	424.47	0.00	0.00	0.00	0.00
1800.00	32.60	80.67	1680.33	77.54	472.01	478.34	0.00	0.00	0.00	0.00
1900.00	32.60	80.67	1764.58	86.27	525.17	532.21	0.00	0.00	0.00	0.00
2000.00	32.60	80.67	1848.83	95.01	578.33	586.08	0.00	0.00	0.00	0.00
2100.00	32.60	80.67	1933.08	103.74	631.49	639.95	0.00	0.00	0.00	0.00
2200.00	32.60	80.67	2017.32	112.47	684.65	693.83	0.00	0.00	0.00	0.00
2300.00	32.60	80.67	2101.57	121.20	737.81	747.70	0.00	0.00	0.00	0.00
2400.00	32.60	80.67	2185.82	129.94	790.97	801.57	0.00	0.00	0.00	0.00
2500.00	32.60	80.67	2270.07	138.67	844.13	855.44	0.00	0.00	0.00	0.00
2600.00	32.60	80.67	2354.32	147.40	897.29	909.32	0.00	0.00	0.00	0.00
2700.00	32.60	80.67	2438.57	156.14	950.45	963.19	0.00	0.00	0.00	0.00
2800.00	32.60	80.67	2522.81	164.87	1003.61	1017.06	0.00	0.00	0.00	0.00
2900.00	32.60	80.67	2607.06	173.60	1056.77	1070.93	0.00	0.00	0.00	0.00
3000.00	32.60	80.67	2691.31	182.33	1109.93	1124.81	0.00	0.00	0.00	0.00
3100.00	32.60	80.67	2775.56	191.07	1163.09	1178.68	0.00	0.00	0.00	0.00
3200.00	32.60	80.67	2859.81	199.80	1216.25	1232.55	0.00	0.00	0.00	0.00
3300.00	32.60	80.67	2944.06	208.53	1269.41	1286.42	0.00	0.00	0.00	0.00
3301.12	32.60	80.67	2945.00	208.63	1270.00	1287.03	0.00	0.00	0.00	0.00
3400.00	32.60	80.67	3028.30	217.27	1322.57	1340.29	0.00	0.00	0.00	0.00
3500.00	32.60	80.67	3112.55	226.00	1375.73	1394.17	0.00	0.00	0.00	0.00
3512.40	32.60	80.67	3123.00	227.08	1382.32	1400.85	0.00	0.00	0.00	0.00
3600.00	32.60	80.67	3196.80	234.73	1428.89	1448.04	0.00	0.00	0.00	0.00
3700.00	32.60	80.67	3281.05	243.46	1482.05	1501.91	0.00	0.00	0.00	0.00
3800.00	32.60	80.67	3365.30	252.20	1535.21	1555.78	0.00	0.00	0.00	0.00
3870.87	32.60	80.67	3425.00	258.39	1572.88	1593.96	0.00	0.00	0.00	0.00
3900.00	32.60	80.67	3449.54	260.93	1588.37	1609.66	0.00	0.00	0.00	0.00
4000.00	32.60	80.67	3533.79	269.66	1641.53	1663.53	0.00	0.00	0.00	0.00
4079.77	32.60	80.67	3601.00	276.63	1683.93	1706.50	0.00	0.00	0.00	0.00
4100.00	32.60	80.67	3618.04	278.40	1694.69	1717.40	0.00	0.00	0.00	0.00
4200.00	32.60	80.67	3702.29	287.13	1747.85	1771.27	0.00	0.00	0.00	0.00
4229.33	32.60	80.67	3727.00	289.69	1763.44	1787.07	0.00	0.00	0.00	0.00
4300.00	32.60	80.67	3786.54	295.86	1801.01	1825.15	0.00	0.00	0.00	0.00
4400.00	32.60	80.67	3870.79	304.60	1854.17	1879.02	0.00	0.00	0.00	0.00
4500.00	32.60	80.67	3955.03	313.33	1907.33	1932.89	0.00	0.00	0.00	0.00
4600.00	32.60	80.67	4039.28	322.06	1960.49	1986.76	0.00	0.00	0.00	0.00
4700.00	32.60	80.67	4123.53	330.79	2013.65	2040.63	0.00	0.00	0.00	0.00
4800.00	32.60	80.67	4207.78	339.53	2066.80	2094.51	0.00	0.00	0.00	0.00
4816.88	32.60	80.67	4222.00	341.00	2075.78	2103.60	0.00	0.00	0.00	0.00
4840.89	32.60	80.67	4242.23	343.10	2088.54	2116.54	0.00	0.00	0.00	0.00

Section 4 : Start Drop -1.50

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
4900.00	31.71	80.67	4292.27	348.20	2119.58	2147.99	1.50	-1.50	0.00	180.00
5000.00	30.21	80.67	4378.02	356.54	2170.35	2199.44	1.50	-1.50	0.00	180.00
5100.00	28.71	80.67	4465.09	364.51	2218.88	2248.62	1.50	-1.50	0.00	180.00
5200.00	27.21	80.67	4553.41	372.11	2265.14	2295.50	1.50	-1.50	0.00	180.00
5224.23	26.85	80.67	4575.00	373.89	2276.01	2306.51	1.50	-1.50	0.00	-180.00
5300.00	25.71	80.67	4642.94	379.33	2309.11	2340.06	1.50	-1.50	0.00	180.00
5400.00	24.21	80.67	4733.59	386.17	2350.75	2382.25	1.50	-1.50	0.00	180.00
5500.00	22.71	80.67	4825.32	392.62	2390.03	2422.06	1.50	-1.50	0.00	180.00
5600.00	21.21	80.67	4918.07	398.69	2426.93	2459.46	1.50	-1.50	0.00	180.00

Scientific Drilling Planning Report

Company: Burlington Resources
Field: Rio Arriba, NM
Site: Sec. 26 T28N R5W (San Juan 28-5#81M)
Well: San Juan 28-5#81M
Wellpath: ST01

Date: 2005-09-26 **Time:** 10:46:29 **Page:**
Co-ordinate(NE) Reference: Well: San Juan 28-5#81M, Grid North
Vertical (TVD) Reference: GL 6733.0
Section (VS) Reference: Well (0.00N,0.00E,80.67Azi)
Plan: Plan #2

Page: 3

Section 4 : Start Drop -1.50

MD ft	Incl deg	Azlm deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
5700.00	19.71	80.67	5011.76	404.35	2461.42	2494.41	1.50	-1.50	0.00	180.00
5800.00	18.21	80.67	5106.33	409.62	2493.48	2526.90	1.50	-1.50	0.00	180.00
5882.53	16.97	80.67	5185.00	413.66	2518.10	2551.85	1.50	-1.50	0.00	-180.00
5900.00	16.71	80.67	5201.72	414.48	2523.09	2556.91	1.50	-1.50	0.00	180.00
6000.00	15.21	80.67	5297.86	418.94	2550.22	2584.40	1.50	-1.50	0.00	180.00
6094.14	13.80	80.67	5389.00	422.76	2573.49	2607.98	1.50	-1.50	0.00	180.00
6100.00	13.71	80.67	5394.69	422.99	2574.86	2609.37	1.50	-1.50	0.00	-180.00
6160.93	12.80	80.67	5454.00	425.25	2588.65	2623.34	1.50	-1.50	0.00	-180.00
6200.00	12.21	80.67	5492.14	426.62	2596.99	2631.80	1.50	-1.50	0.00	180.00
6300.00	10.71	80.67	5590.14	429.84	2616.60	2651.67	1.50	-1.50	0.00	180.00
6400.00	9.21	80.67	5688.63	432.65	2633.66	2668.96	1.50	-1.50	0.00	180.00
6500.00	7.71	80.67	5787.54	435.03	2648.18	2683.68	1.50	-1.50	0.00	180.00
6502.48	7.67	80.67	5790.00	435.09	2648.51	2684.01	1.50	-1.50	0.00	-180.00
6600.00	6.21	80.67	5886.80	437.00	2660.14	2695.79	1.50	-1.50	0.00	180.00
6700.00	4.71	80.67	5986.35	438.54	2669.53	2705.31	1.50	-1.50	0.00	180.00
6800.00	3.21	80.67	6086.10	439.66	2676.34	2712.21	1.50	-1.50	0.00	180.00
6900.00	1.71	80.67	6186.01	440.35	2680.58	2716.51	1.50	-1.50	0.00	180.00
7000.00	0.21	80.67	6285.99	440.63	2682.23	2718.18	1.50	-1.50	0.00	180.00
7014.01	0.00	0.00	6300.00	440.63	2682.26	2718.21	1.50	-1.50	0.00	-180.00

Section 5 : Start Hold

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
7020.01	0.00	0.00	6306.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7100.00	0.00	0.00	6385.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7200.00	0.00	0.00	6485.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7300.00	0.00	0.00	6585.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7400.00	0.00	0.00	6685.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7500.00	0.00	0.00	6785.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7600.00	0.00	0.00	6885.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7683.01	0.00	0.00	6969.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7700.00	0.00	0.00	6985.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7800.00	0.00	0.00	7085.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
7900.00	0.00	0.00	7185.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8000.00	0.00	0.00	7285.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8100.00	0.00	0.00	7385.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8200.00	0.00	0.00	7485.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8300.00	0.00	0.00	7585.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8400.00	0.00	0.00	7685.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8436.01	0.00	0.00	7722.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8500.00	0.00	0.00	7785.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8503.01	0.00	0.00	7789.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8552.01	0.00	0.00	7838.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8600.00	0.00	0.00	7885.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8646.01	0.00	0.00	7932.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8700.00	0.00	0.00	7985.99	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8702.01	0.00	0.00	7988.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8760.01	0.00	0.00	8046.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00
8774.01	0.00	0.00	8060.00	440.63	2682.26	2718.21	0.00	0.00	0.00	0.00

Targets

Name	Description	Dir.	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	← Latitude →			← Longitude →				
								Deg	Min	Sec	Deg	Min	Sec		
28-5#31M BHL -Plan hit target			8060.00	440.63	2682.26	2047873.84	649308.80	36	37	37.188	N	107	19	28.218	W



Scientific Drilling Planning Report

Company: Burlington Resources
Field: Rio Arriba, NM
Site: Sec. 26 T28N R5W (San Juan 28-5#81M)
Well: San Juan 28-5#81M
Wellpath: ST01

Date: 2005-09-26 **Time:** 10:46:29 **Page:** 4
Co-ordinate(NE) Reference: Well: San Juan 28-5#81M, Grid North
Vertical (TVD) Reference: GL 6733.0
Section (VS) Reference: Well: (0.00N,0.00E,80.67Azi)
Plan: Plan #2

Formations

MD ft	TVD ft	Formations	Lithology	Dip Angle deg	Dip Direction deg
3301.12	2945.00	Ojo Alamo		0.00	80.67
3512.40	3123.00	Kirtland		0.00	80.67
3870.87	3425.00	Fruitland		0.00	80.67
4079.77	3601.00	Pictured Cliffs		0.00	80.67
4229.33	3727.00	Lewis		0.00	80.67
4816.88	4222.00	Hurfanito Bentonite		0.00	80.67
5224.23	4575.00	Chacra		0.00	80.67
5882.53	5185.00	Uppercliff House		0.00	80.67
6094.14	5389.00	Massive Cliff House		0.00	80.67
6160.93	5454.00	Menefee		0.00	80.67
6502.48	5790.00	Point Lookout		0.00	80.67
7020.01	6306.00	Mancos		0.00	80.67
7683.01	6969.00	Gallup		0.00	80.67
8436.01	7722.00	Greenhorn		0.00	80.67
8503.01	7789.00	Graneros		0.00	80.67
8552.01	7838.00	Dakota		0.00	80.67
8646.01	7932.00	Upper Cubero		0.00	80.67
8702.01	7988.00	Lower Cubero		0.00	80.67
8760.01	8046.00	Oak Canyon		0.00	80.67
	0.00	Formation 21		0.00	80.67