

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
APPLICATION FOR PERMIT TO DRILL OR REENTER


FORM APPROVED  
OMB No. 1004-0137  
Expires March 31, 2007

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM-0149968
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator XTO ENERGY INC 167067		7. If Unit or CA Agreement, Name and No. N/A
3a. Address 2700 FARMINGTON AVE., BLDG. K-1 FARMINGTON, NM 87401	3b. Phone No. (include area code) (505) 324-1090	8. Lease Name and Well No. FEDERAL GAS COM K 2 22710
4. Location of Well (Report location clearly and in accordance with any State requirements *) At surface 1085 FNL & 945 FWL At proposed prod. zone SAME Lot - 1		9. API Well No. 30-045-32450
14. Distance in miles and direction from nearest town or post office* 8 AIR MILES SOUTH OF FARMINGTON		10. Field and Pool, or Exploratory BASIN FRUITLAND COAL 71629
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 945'	16. No. of acres in lease 512.40	11. Sec., T. R. M. or Blk. and Survey or Area 0 7-27N-12W NMMPM
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 86' (XTO's K 1)	19. Proposed Depth 1,500'	12. County or Parish SAN JUAN
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5,766' GL	22. Approximate date work will start* 05/01/2005	13. State NM
23. Estimated duration 2 WEEKS		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).    |
| 2. A Drilling Plan.   | 5. Operator certification  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) BRIAN WOOD	Date 10/26/2004
---	------------------------------------	--------------------

Title  
CONSULTANT

PHONE: (505) 466-8120


FAX: (505) 466-9682

Approved by (Signature) 	Name (Printed/Typed) J. M. Anderson	Date 2/15/06
Title AFM	Office FFO	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on page 2)



DISTRICT I  
P.O. Box 1980, Hobbs, N.M. 88241-1980

State of New Mexico  
Energy, Minerals & Natural Resources Department

Form C-102  
Revised February 21, 1994

DISTRICT II  
P.O. Drawer DD, Artesia, N.M. 88211-0719

Instructions on back  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

DISTRICT III  
1000 Rio Brazos Rd., Aztec, N.M. 87410

OIL CONSERVATION DIVISION

P.O. Box 2088  
Santa Fe, NM 87504-2088

DISTRICT IV  
PO Box 2088, Santa Fe, NM 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30-045-32650		*Pool Code 71629	*Pool Name BASIN FRUITLAND COAL
*Property Code 22710	*Property Name FEDERAL GAS COM K		*Well Number 2
*GRID No. 167067	*Operator Name XTO ENERGY INC.		*Elevation 5766

<sup>10</sup> Surface Location

UL or lot no. D	Section 7	Township 27-N	Range 12-W	Lot Idn -	Feet from the 1085	North/South line NORTH	Feet from the 945	East/West line WEST	County SAN JUAN
--------------------	--------------	------------------	---------------	--------------	-----------------------	---------------------------	----------------------	------------------------	--------------------

<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
*Dedicated Acres 304.96		*Joint or Infill		*Consolidation Code C		*Order No.			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

SEC. CORNER FD 3 1/2" BC GLO 1911	1085'	S 89°57' E 5158.7' (M)	CALC. CORNER
LOT 1 945'			
LOT 2 S 00°00'41" E 2636.2' (M)			
SEC. CORNER FD 2 1/2" BC GLO 1911		7	
LOT 3			
LOT 4			

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief

Signature  
BRIAN WOOD  
Printed Name  
CONSULTANT  
Title  
OCT. 25, 2004  
Date


18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date of Survey  
NEW MEXICO  
REGISTERED PROFESSIONAL SURVEYOR  
14827  
Certificate Number




XTO ENERGY INC.  
 FEDERAL GAS COM K No. 2, 1085 FNL 945 FWL  
 SECTION 7, T27N, R12W, N.M.P.M., SAN JUAN COUNTY, N. M.  
 GROUND ELEVATION: 5766, DATE: SEPTEMBER 22, 2003

LAT. = 36°35'38" N  
 LONG. = 108°09'28" W  
 NAD 27

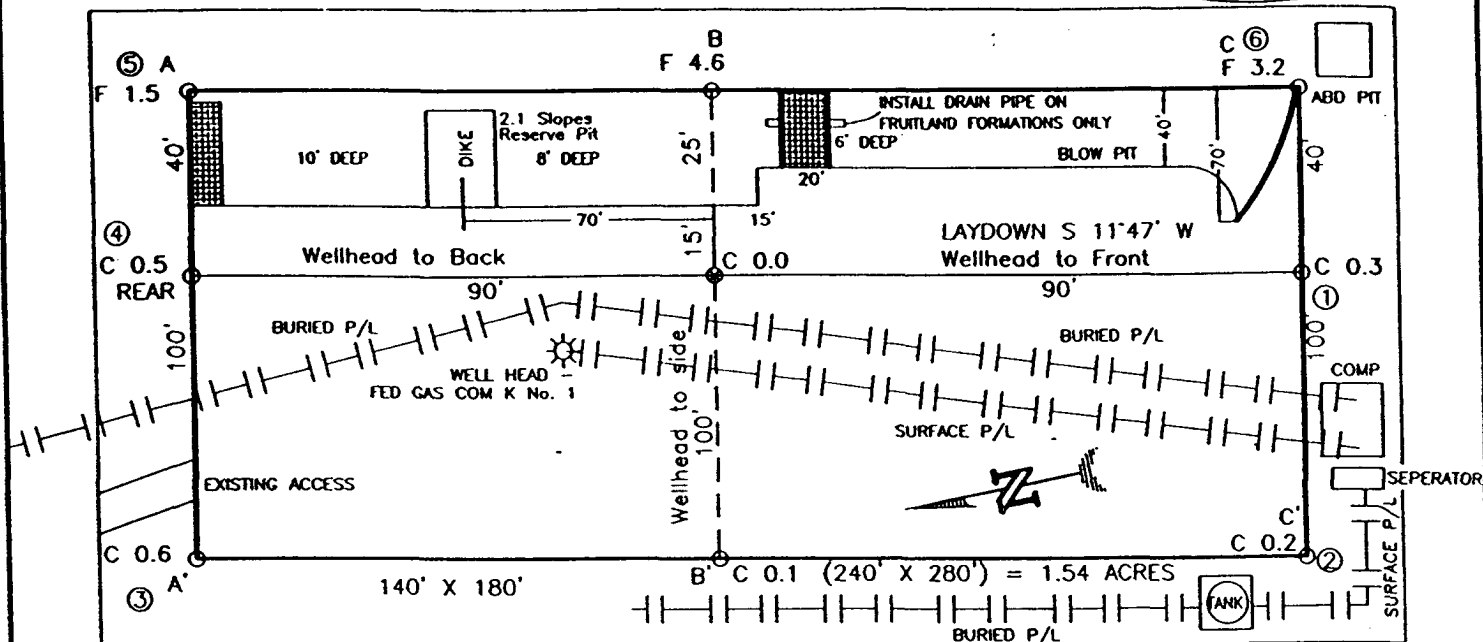

RESERVE PIT DIKE: TO BE 8" ABOVE DEEP SIDE (OVERFLOW - 3" WIDE AND 1" ABOVE SHALLOW SIDE).  
 BLOW PIT: OVERFLOW PIPE HALFWAY BETWEEN TOP AND BOTTOM AND TO EXTEND OVER PLASTIC LINER AND INTO BLOW PIT.

NOTE: DAGGETT ENTERPRISES, INC. IS NOT LIABLE FOR  
 UNDERGROUND UTILITIES OR PIPELINES. NEW MEXICO  
 ONE CALL TO BE NOTIFIED 48 HOURS PRIOR TO  
 EXCAVATION OR CONSTRUCTION.

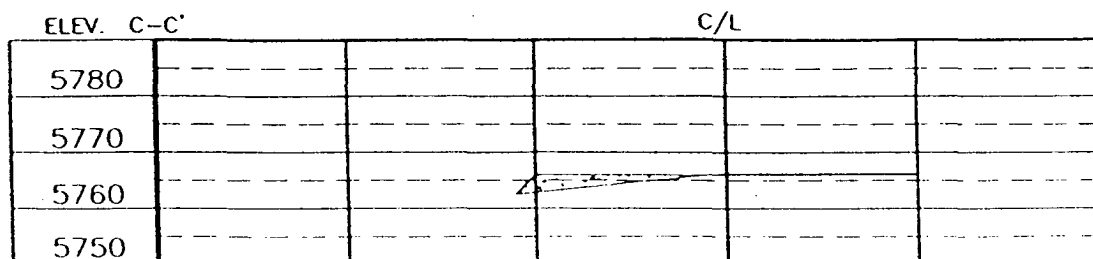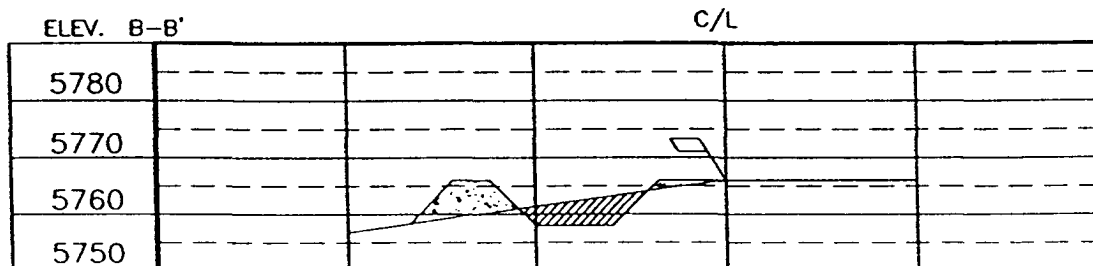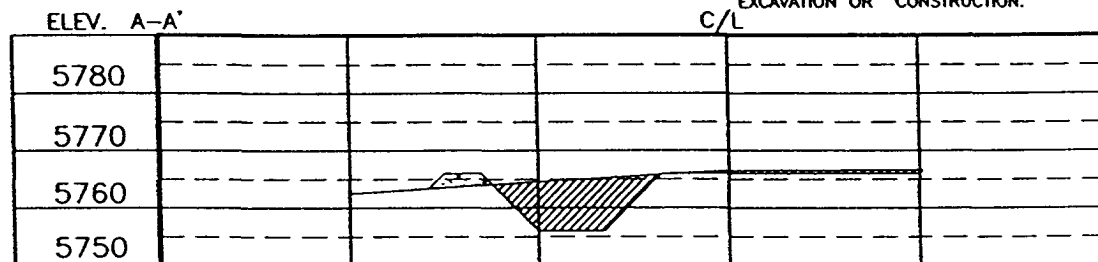

NOTE: CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES  
 ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.

DRAWN BY: A.G.

ROW#: CR235

CADFILE: CR235CFB

DATE: 09/30/03

Daggett Enterprises, Inc.  
 Surveying and Oil Field Services  
 P. O. Box 15068 Farmington, NM 87401  
 Phone (505) 326-1772 Fax (505) 326-6019



XTO Energy Inc.  
Federal Gas Com K 2  
1085' FNL & 945' FWL  
Sec. 7, T. 27 N., R. 12 W.  
San Juan County, New Mexico

PAGE 1

### Drilling Program

#### 1. ESTIMATED FORMATION TOPS

<u>Formation Name</u>	<u>GL Depth</u>	<u>KB Depth</u>	<u>Sub sea Elevat</u>
Nacimiento Formation	000'	5'	+5,766'
Ojo Alamo Sandstone	100'	105'	+5,666'
Fruitland Coal	1,051'	1,056'	+4,715'
Pictured Cliffs Ss	1,351'	1,356'	+4,415'
Lewis Shale	1,456'	1,461'	+4,310'
Total Depth (TD)*	1,500'	1,505'	+4,266'

\* all elevations reflect the ungraded ground level of 5,766'

#### 2. NOTABLE ZONES

##### Gas & Oil Zones

Fruitland  
Pictured Cliffs

##### Water Zones

Nacimiento  
Ojo Alamo  
Fruitland

##### Coal Zone

Fruitland

Water zones will be protected with casing, cement, and weighted mud. Fresh water found while drilling will be recorded. Oil or gas shows will be tested for commercial potential based on the geologist's recommendations.

#### 3. PRESSURE CONTROL

The drilling contract has not yet been awarded, thus the exact BOP system to be used is not yet known. A typical 2,000 psi stack and manifold are on Page 3. BOP equipment and all accessories will meet or exceed BLM requirements in 43 CFR Part 3160 for a 2,000 psi system. A 2,000 psi double ram hydraulic BOP will be used. Accumulator system capacity will be

XTO Energy Inc.  
Federal Gas Com K 2  
1085' FNL & 945' FWL  
Sec. 7, T. 27 N., R. 12 W.  
San Juan County, New Mexico

PAGE 2

sufficient to close all BOPE with a 50% safety factor. Fill, kill, and choke manifold lines will be 2" screw connections. Accessories will include upper and lower Kelly cocks with handles, stabbing valve to fit drill pipe on floor at all times, string float at bit, 2000 psi choke manifold with 2" adjustable choke with screw connections, and pressure gauge. BOPs will be tested every 24 hours. Tests will be recorded on an I. A. D. C. log.

#### 4. CASING & CEMENT

<u>Hole Size</u>	<u>O. D.</u>	<u>Weight (lb/ft)</u>	<u>Grade</u>	<u>Age</u>	<u>Connection</u>	<u>GL Setting Depth</u>
8-3/4"	7"	20	K-55	New	S T & C	160'
6-1/4"	4-1/2"	10.5	K-55	New	S T & C	1,500'

Surface casing will be cemented to the surface with  $\approx 50$  cubic feet ( $\approx 43$  sacks) Class B + 1/4 lb/sk cello-flake + 2%  $\text{CaCl}_2$ . Yield = 1.18 cubic feet per sack. Weight = 15.2 pounds per gallon. Volume:  $\geq 100\%$  excess. A guide shoe and insert float will be used. W. O. C. = 12 hours. Surface casing will be tested to 1,500 psi for 30 minutes.

Production casing will be cemented to the surface. Total cement:  $\geq 367$  cubic feet. Volumes are calculated at  $>100\%$  excess. If cement does not circulate to surface, then a temperature survey will be run to determine the actual cement top as needed. W. O. C. 12 hours. Test to 2,000 psi.


Lead cement will be  $\approx 150$  sacks Class B light cement (65% cement/35% Poz with 6% gel) with 5 #/sack gilsonite + 1/4 #/sack Flocele. Yield = 1.99 cu ft/sk. Weight = 12.4 #/gal.

Tail cement will be  $\approx 50$  sacks 50/50 Class B Poz with 2% gel + 1/4 #/sack Flocele + 0.5% Halad-9. Yield = 1.38 cubic feet/sack. Weight = 13.5 #/gallon.

Cement equipment will include a guide shoe, float collar, and  $\approx 7$  centralizers.

# Pressure Control Equipment

- Note: 1. An upper Kelly cock valve will be utilized during drilling. Handle will be available for easy access.
2. Safety valves and necessary subs to fit all drill string in use will be available.

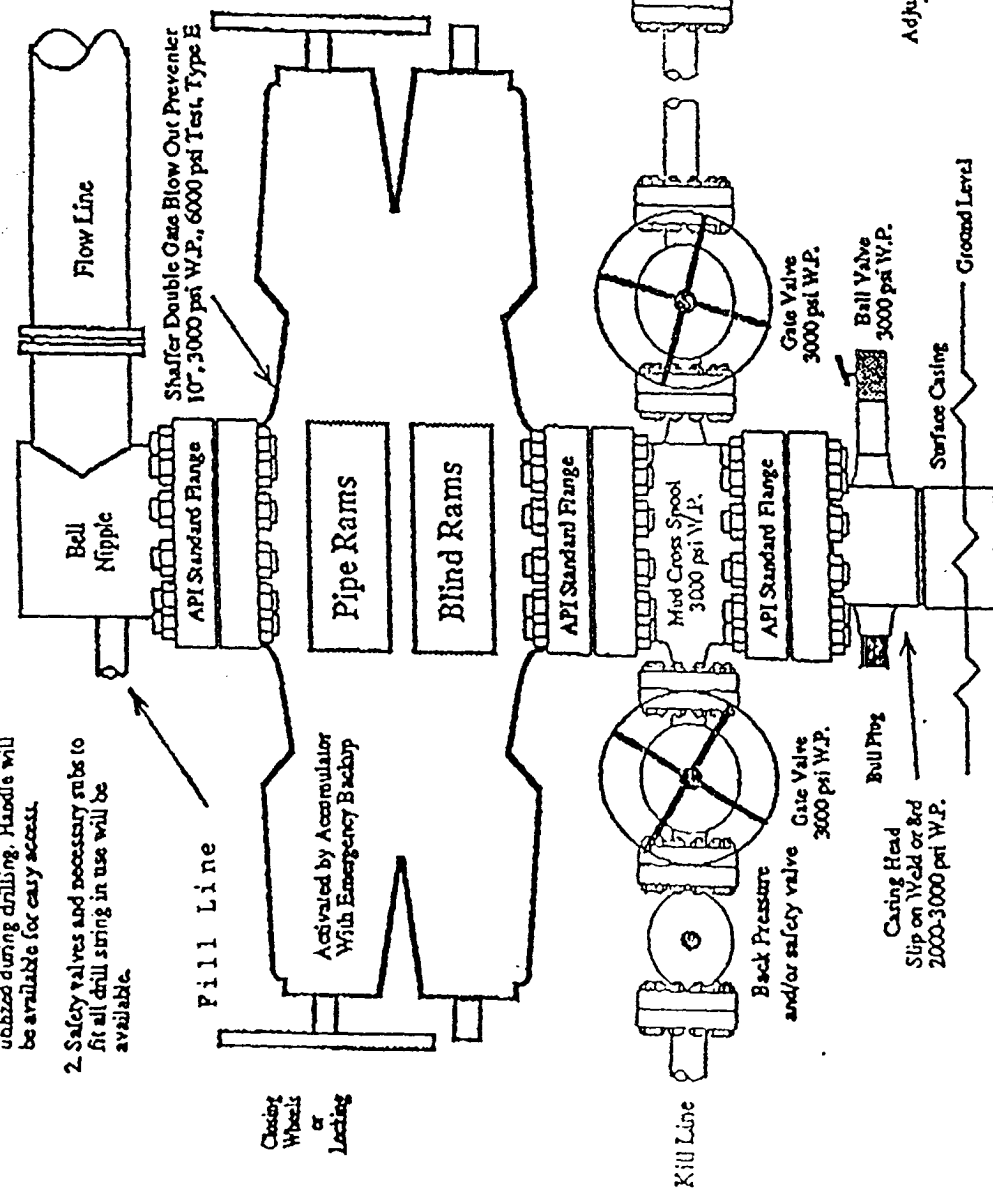

Note: This equipment is designed to meet requirements for a 2-M rating standard per 43 CFR part 3160 (amended). Proper operation and testing of equipment will be carried out per standard. 2,000 psi equipment can be substituted in the drawing to meet minimum requirements per standard.

Minimum 2" Choke Line.  
Minimum 2" Kill Line.  
At Least One 2" Minimum Kill Line Valve.

XTO Energy Inc.  
Federal Gas Com K 2  
1085' FNL & 945' FWL  
Sec. 7, T. 27 N., R. 12 W.  
San Juan County, New Mexico

PAGE 4

5. MUD PROGRAM

<u>RANGE</u>	<u>MUD TYPE</u>	<u>WEIGHT</u>
0' - 160'	Fresh-Spud	8.4
160' - TD	LSND	8.6

Lost circulation and absorption material will be on location.

6. CORING, TESTING, & LOGGING

No cores or drill stem tests are planned. Open hole logs will include GR, Neutron-Density, and Induction. The Neutron Density will be run from TD to 500'. The other logs will be run from TD to the base of the surface casing.

7. DOWN HOLE CONDITIONS

No abnormal pressures, temperatures, nor hydrogen sulfide are expected. Maximum pressure will be  $\leq 200$  psi.

8. OTHER INFORMATION

The anticipated spud date is upon approval. It is expected it will take about 1 week to drill and about 1 week to complete the well.