

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

APPLICATION FOR PERMIT TO DRILL OR REENTER

DEC 7 AM 10 59

5. Lease Designation and Serial No.

9F-078977

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement, Name and No.

8. Lease Name and Well No.

Madrid 29-13-6 #112

9. API Well No.

30-045-33470

10. Field and Pool, or Exploratory
Basin Fruitland Coal

11. Sec., T., R., M., or Blk. and Survey or Area

Sec 6, T-29-N, R-13-W

12. County or Parish,
San Juan

13. State
New Mexico

17. Spacing Unit dedicated to this well

220 Acres (N/2) 238.11

1a. Type of Work ☒ DRILL ☐ REENTER

1b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

2. Name of Operator

Synergy Operating, LLC

NM OGRID # 163458

3a. Address

PO Box 5513
Farmington, NM 87499

3b. Phone Number

(505) 325-5449

4. Location of Well (Footage, Sec, T. R., M, or Survey Description)

At surface: Unit Letter C, 1215' FNL, 715' FWL, Sec 6, T29N-R13W

At proposed prod. Zone: Same

14. Distance in miles and direction from nearest town or post office*

2.0 miles west of Farmington, NM

15. Distance from proposed*

location to nearest 715' to the West
property or lease line, ft.

(Also to nearest drlg. Unit line, if any)

16. No of Acres in lease

Acres

18. Distance from proposed*

location to nearest 1215' to the North
property or lease line, ft.

19. Proposed Depth

1450'

20. BLM/BIA Bond No. on file

NM-2559

21. Elevation (Show whether DF, KDB, RT, GL, etc.)

5502' Ground Level

22. Approximate date work will start*

February 1, 2006

23. Estimated duration

30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office.

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized officer

Size of Hole	Grade, Size of Casing	Weight per Foot	Setting Depth	Quantity of Cement
12-1/4"	8-5/8" J-55	24 #	220'	150-sxs, 213 ft3 - 100% Excess
7-7/8"	5-1/2" J-55	15.5#	1450'	200-sxs, 354 ft3 - 100% OH Excess

SEE ATTACHED APD INFORMATION

Latitude: 36 Deg, 45 Min, 34 Sec N
Longitude: 108 Deg, 14 Min, 58 Sec W

25. Signature

Glen O. Papp

Name (Printed/Typed)

Glen O. Papp

Date

12-6-05

Title Operations Manager

Approved by (Signature)

[Signature]
AFM

Name (Printed/Typed)

Office FFO

Date

3/7/06

Title

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

This action is subject to technical and
procedural review pursuant to 43 CFR 3165.9
and appeal pursuant to 43 CFR 3165.4

NMOCB

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 15, 2000

DISTRICT II
811 South First, Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
2040 South Pacheco, Santa Fe, NM 87505

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

RECEIVED

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-33470	² Pool Code 71629	³ Pool Name BASIN FRUITLAND COAL
⁴ Property Code 35509	⁵ Property Name MADRID 29-13-6	⁶ Well Number 112
⁷ OGRID No. 163458	⁸ Operator Name SYNERGY OPERATING, L.L.C.	⁹ Elevation 5502'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	6	29N	13W	3	1215'	NORTH	715'	WEST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 252.95 Acres - (N/2)			¹³ Joint or Infill		¹⁴ Consolidation Code		¹⁵ Order No.		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

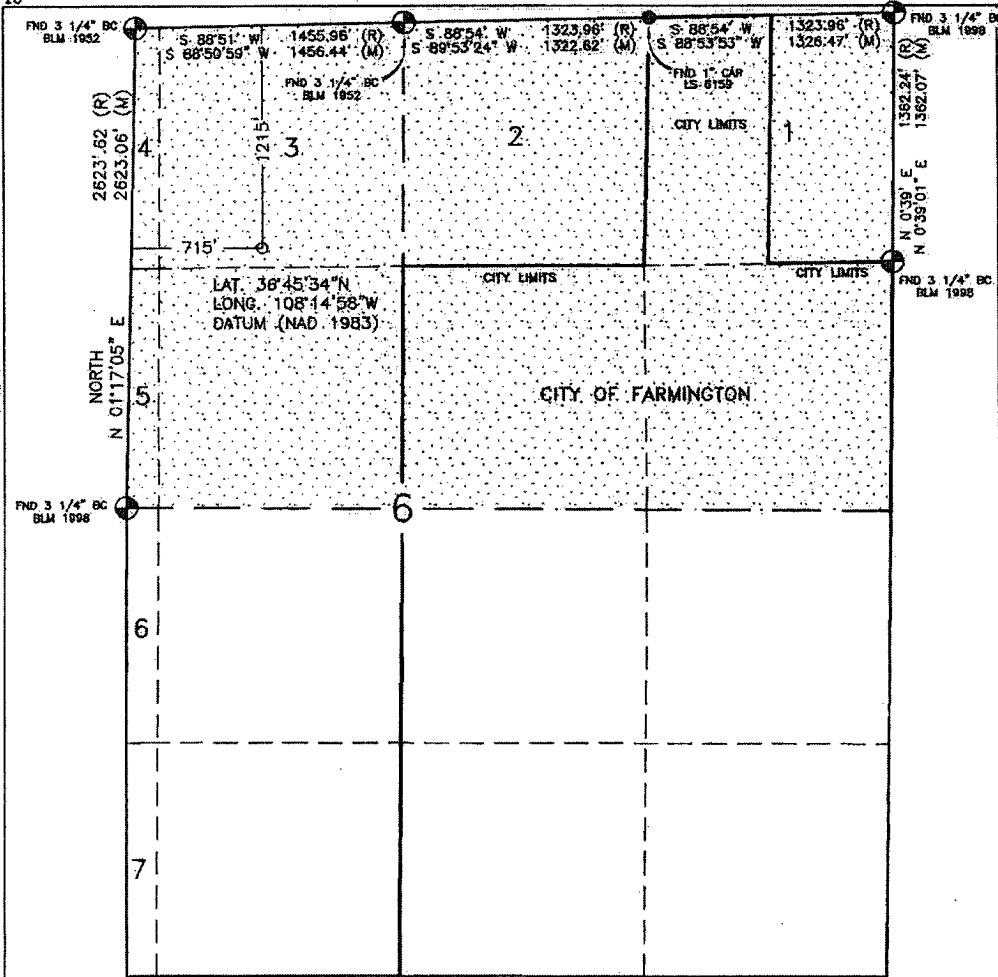

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief

GLEW O. PAPP
Signature
GLEW O. PAPP
Printed Name
OPERATIONS MANAGER
Title
Nov 8, 2005
Date



18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.




OCTOBER 13, 2005
Date of Survey
Signature and Seal of Professional Surveyor:
DAVID R. RUSSELL
DAVID R. RUSSELL
Certificate Number 10201

SYNERGY OPERATING, L.L.C.


MADRID 29-13-6 #112
1215' FNL & 715' FWL
LOCATED IN THE NE/4 NW/4 OF SEC. 6,
T29N, R13W, N.M.P.M.,
SAN JUAN COUNTY, NEW MEXICO
ELEVATION: 5502', NAVD 88

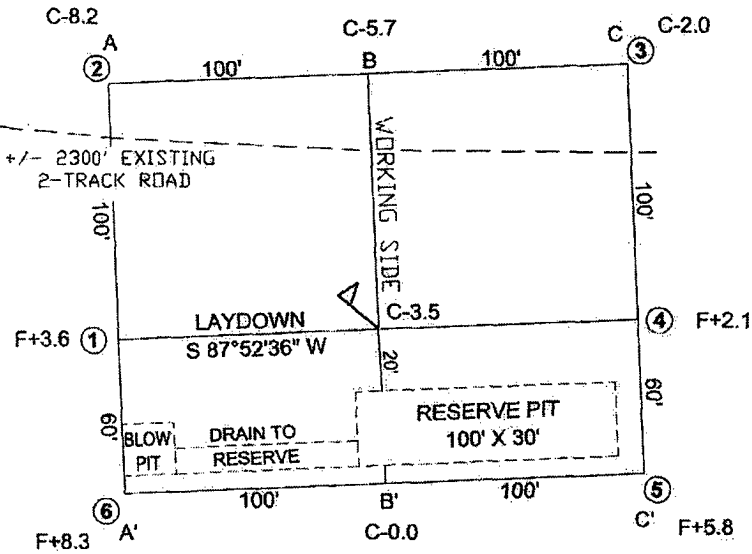

LATITUDE: 36°45'34"N
LONGITUDE: 108°14'58"W
DATUM: NAD 83

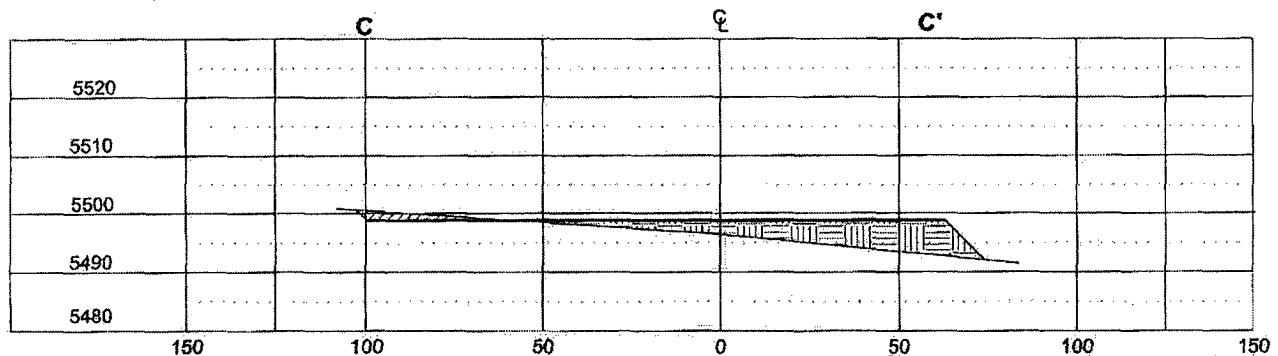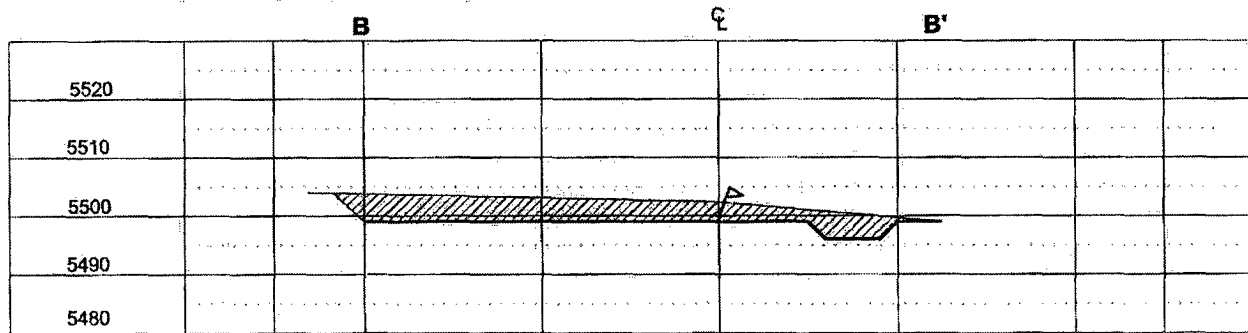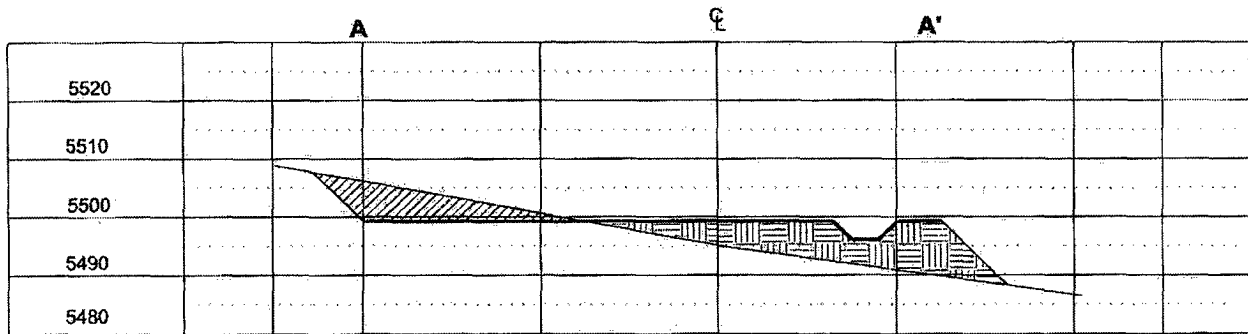

HORIZ. SCALE: 1"=50'
VERT. SCALE: 1"=30'



Russell Surveying
1409 W. Aztec Blvd. #5
Aztec, New Mexico 87410

Synergy Operating LLC

Operations Plan

Well Name: Madrid 29-13-6 #112

Location: Unit C, 1215' FNL, 715' FWL, Sec. 6, T-29-N, R-13-W, San Juan Co. NM
Latitude 36° 45' 34" N, Longitude 108° 14' 58" W

Field: Basin Fruitland Coal

Elevation: 5502' GL

GEOLOGIC PROGRAM

Formations:	Tops/Depth	Fluids
Kirtland	Surface	None
Fruitland	797'	None
Fruitland Basal Coal	1177'	Natural gas & produced water
Pictured Cliffs	1202'	Natural gas & produced water
Pictured Cliffs(Base)	1310'	
TOTAL Depth	1425'	

Logging Program:

- A) Open Hole: Density + Neutron: TD to Surface Csg Shoe
B) Cased Hole: GR-CCL-CBL

Mudlogs, Cores, DST's:

No mudlogs, coring or drill-stem testing (DST's) are scheduled.

Anticipated Downhole Conditions:

It is not anticipated that any abnormal temperatures, abnormal pressures or hydrogen sulfide gas will be encountered. The maximum anticipated formation pressures are expected to be less than 1000-PSIG.

DRILLING PROGRAM

Contractor: A local rotary drilling company is yet to be determined.

Mud Program: Freshwater based mud system will be utilized. Water sourced from commercial suppliers.

Depth	Type	Viscosity	PPG
0-220'	Spud	40-50	8.4-8.9
220'-TD	Low Solids, Non-dispersed	30-60	8.4-9.5*

* Barite will be used as a weighting material if needed

Pressure Control / Blow Out Preventers (BOP's):

All BOP systems will be in accordance with MMS Onshore Oil & gas Order No 2. Until the drilling contract has been let, the exact make, model and pressure rating of BOP's is unknown. A typical double gate BOP with a rotating head is shown in the attached Exhibit #1. A typical Choke & Kill manifold is also shown in the attached Exhibit #1.

An upper kelly cock valve with handle and drill string safety valves for each size of drill pipe will be available on the rig floor.

BOP Testing:

220' (Surface Csg Shoe) – TD: An 11" 2000# or 3000# double gate BOP Stack & choke manifold will be utilized. All BOP systems will be tested in accordance with MMS Onshore Oil & gas Order No 2. A test plug will be used to test the BOPE, and the resultant pressures will be recorded using a test pump, calibrated test gauges and a calibrated chart recorder. A low pressure test of 250 PSIG will be held for 10-minutes, and a high pressure test will be tested to 1000 PSIG for 10-minutes. Prior to drilling out the surface casing, the 8-5/8" 24# surface casing will be tested to 1000 PSIG for 30-minutes.

Pipe rams will be hydraulically actuated at least once a day. The blind rams will be function tested on each pipe trip. All ram function testing and BOP pressure testing will be recorded on the daily IADC drilling logs.

Casing & Tubing Program:

All casing shall be new and constructed to API standards.

Hole Size	OD	Weight	Grade	GL Set Depth	Clearance Hole/Collar
12-1/4"	8.625"	24#/ft	J-55	0' – 220'	1.3125"
7-7/8"	5.500"	15.5#/ft	J-55	0' – TD(1425'+/-)	0.9125"
2-3/8"	2.375"	4.7#/ft	J-55	Unknown	

Float Equipment & Centralizers:

8-5/8" Surface Casing: Cement Guide Shoe, 1-Jt 8-5/8" casing as shoe joint and 8-5/8" casing to surface. Centralizers will be on the bottom three joints, the bottom most centralizer will be run 10' above the shoe, secured with a stop ring. The other two centralizers will be secured around the collars. Surface casing will be run to a minimum depth of 220' to ensure protection of surface waters.

5-1/2" Production Casing: A cement nose guide shoe, 1-Jt 5-1/2" casing as shoe joint, float collar w/ auto-fill, and 5-1/2" casing to surface. A turbolizer will be run 10' above the shoe, secured with a stop ring, and two centralizers will be applied around the collars of the bottom most casing joints. Additional centralizers will be deployed every sixth joint from the third most bottom joint to surface.

Wellhead Equipment:

A 8-5/8" x 5-1/2" 2000# bradenhead will be screwed on to the top joint of the 8-5/8" surface casing.

Cementing Program:

8-5/8" Surface Casing: Pump 150-sxs (213-ft³) Type III Cement w/ 3% CaCl₂ + 1/4-#/sx Celloflake. Yield = 1.42 ft³/sx, Slurry Weight = 14.5 PPG. Cement volume is 100% of annular excess to ensure circulation to surface. Wait on Cement (WOC) for 8-Hours. Pressure test surface casing to 1000# for 30-Minutes.

5-1/2" Production Casing:

Lead Slurry: Pump 100-sxs (215-ft³) Premium Lite FM Cement w/ 3% CaCl₂ + 1/4-#/sx Celloflake + 0.4% FL-52 + 8% Bentonite + 0.4% Sodium Metasilicate + 3-#/sx Pheno-Seal. Yield = 2.15 ft³/sx, Slurry Weight = 12.1 PPG.

Tail Slurry: Pump 100-sxs (139-ft³) Type III Cement w/ 1% CaCl₂ + 1/4-#/sx Celloflake + 0.2% FL-52 + 2-#/sx Pheno-Seal. Yield = 1.39 ft³/sx, Slurry Weight = 14.6 PPG. Total slurry volume is 354-ft³.

The projected annular open hole volume from 1425' to surface is: 255.5-ft³. Cement volume is 100% excess of annular openhole volume for the lead cement slurry, to ensure circulation to surface. The job is designed to circulate the cement to surface.

Estimated Drilling Time:

Spud date will occur after the APD has been approved, the location built and a drilling contractor selected and scheduled. Once drilling operations commence, it is anticipated that the drilling phase should be completed within three (3) to five (5) days.

Estimated Completion Time:

Rig completion activities are estimated to take approximately five (5) days. Surface facilities anticipated will include a rod pumping unit, separator, one four-hundred (400) bbl water production tank and a well-site compressor with noise abating sound walls. No oil production is anticipated from this well.

Reserve Pit Construction/Closure:

The attached plat depicts the planned reserve pit and the proposed dimensions. The pit will be lined with an approved lining material, a minimum of a 12 mils in thickness. The pit will be constructed and closed per the November 1, 2004 NMOCD pit guideline information. A form C-144 will be prepared and submitted for the reserve pit in conjunction with this APD submittal.

Exhibit #1

Well Control Equipment Schematic for 2M Service

Attachment to Drilling Technical Program

Typical BOP setup

Location: San Juan Basin, New Mexico

