District I
1025 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application
Type of action: US-09395 Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration OIL CONS. DIV DIST. 3 SEP 0 9 2015
Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: Burlington Resources OGRID #: 14538
Address: PO BOX 4289, Farmington, NM 87499
Facility or well name: Sunray D #1
API Number: 30-045-09295 OCD Permit Number:
U/L or Qtr/Qtr M (SWSW) Section 21 Township 30N Range 10W County: SAN JUAN
Center of Proposed Design: Latitude 36.79301 °N Longitude -107.89494 °W NAD: □1927 ☑ 1983
Surface Owner: Federal State Tribal Trust or Indian Allotment
Temporary: Drilling Workover Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other String-Reinforced Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3. Subsection I of 19.15.17.11 NMAC
Volume: 120 bbl Type of fluid: Produced Water
Tank Construction material: Metal
☐ Secondary containment with leak detection ☒ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other
Liner type: Thickness 45 mil HDPE PVC Other LLDPE
Liner type: Thickness 45 mil HDPE PVC Other LLDPE 4. Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Form C-144

Oil Conservation Division

Page 1 of 6

6. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accematerial are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☑ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	
	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	15
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC
11. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC	15 m
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the document attached.	cuments are
□ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC □ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC □ A List of wells with approved application for permit to drill associated with the pit. □ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC □ Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC	.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	

9	12.	
	Per nanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are
	attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
	☐ Climatological Factors Assessment ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC	
	☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC	
	☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC	
	Quality Control/Quality Assurance Construction and Installation Plan	
	☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC	
	☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan	
	☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization	
	☐ Monitoring and Inspection Plan ☐ Erosion Control Plan	
	Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
	13.	
	Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
	Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative	luid Management Pit
	Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)	
	On-site Closure Method (Only for temporary pits and closed-loop systems)	
	☐ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method	
1	14.	
	Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
1	15.	
	Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. F 19.15.17.10 NMAC for guidance.	rce material are Please refer to
	Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
	Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
	Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
	Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
	Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
	Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application.	☐ Yes ☐ No
	- NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	
	Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 300 feet of a wetland.	Yes No
	US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
1	Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area.	
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
16.	
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC
17. Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and beli	ef.
Name (Print): Title:	
Signature: Date:	
e-mail address:	
e-mail address: Telephone:	
e-mail address: Telephone:	the closure report.
e-mail address: Telephone:	the closure report.
e-mail address: Telephone:	the closure report.
e-mail address: Telephone:	the closure report.
e-mail address:	the closure report.
e-mail address:	the closure report. complete this
e-mail address:	the closure report. complete this
e-mail address: Telephone:	the closure report. complete this
e-mail address: Telephone:	the closure report. complete this
e-mail address: Telephone:	the closure report. complete this
e-mail address: Telephone: It. OCD Approval:	the closure report. complete this
e-mail address:	the closure report. complete this

22.

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): Dollie L. Busse Title: Star Regulatory Technician

Signature: Muse Muse

Date: 9/8/15

e-mail address: dollie.l.busse@cop.com Telephone: (505) 324-6104

Burlington Resources Oil Gas Company, LP San Juan Basin Below Grade Tank Closure Report (Without Reclamation)

Lease Name: SUNRAY D #1 API No.: 30-045-09295

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

- 1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.
- 2. The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.
- 3. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

 BR Will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

5. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

6. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

7. A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/kg)		
Benzene	EPA SW-846 8021B or 8260B	0.2		
BTEX	EPA SW-846 8021B or 8260B	50		
TPH	EPA SW-846 418.1	100		
Chlorides	EPA 300.1	250		

 If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the
site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 10. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is missing due to employee turnovers. ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

11. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner not found. COPC was not aware that the original notification sent at the time of Permitting was not the only closure notification required.

ConocoPhillips has reviewed our internal processes and has updated them to include the required 72 hour notification.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area will be re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping, including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. BR Shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved

methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 will be accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 15. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Closure Documentation was not submitted within the 60 day requirement due to employee turnovers.

ConocoPhillips has reviewed our internal processes and has updated them to ensure closure documentation is submitted with the 60 day time frame.

February 12, 2014

Crystal Tafoya ConocoPhillips San Juan Business Unit Office 214-05 5525 Hwy 64 Farmington, New Mexico 87401

Via electronic mail to: SJBUE-Team@ConocoPhillips.com

RE: Below Grade Tank Closure Report

Sunray D #1

San Juan County, New Mexico

Dear Ms. Tafoya:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) Sunray D #1, located in San Juan County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name – Sunray D #1

Legal Description – SW¼ SW¼, Section 21, T30N, R10W, San Juan County, New Mexico

Well Latitude/Longitude – N36.79284 and W107.89496, respectively

BGT Latitude/Longitude – N36.79301 and W107.89494, respectively

Land Jurisdiction – Bureau of Land Management (BLM)

Figure 1. Topographic Site Location Map

Figure 2. Aerial Site Map, January 2014

1.2 NMOCD Ranking

In accordance with the New Mexico Oil Conservation Division (NMOCD) Guidelines for Remediation of Leaks, Spills, and Releases (August 1993), the location was given a ranking score of 10 based on the following factors:



www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

Crystal Tafoya Sunray D #1 BGT Closure Report February 12, 2014 Page 2 of 5

- Depth to Groundwater: A cathodic protection report form dated May 1991 reported the depth to groundwater at 120 feet below ground surface (bgs). (0 points)
- Wellhead Protection Area: The tank location is not within a wellhead protection area. (0 points)
- Distance to Surface Water Body: An unnamed wash which discharges to the wash in Potter Canyon is located approximately 240 feet southeast of the location. (10 points)

1.3 BGT Closure Assessment

AES was initially contacted by Danny Rudder, CoP representative, on January 16, 2014, and on January 17, 2014, Deborah Watson and David Reese of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On January 17, 2014, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for VOCs and chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photoionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8021B; and
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 0.1 ppm in S-4 up to 0.9 ppm in S-1. Field TPH concentrations ranged from 20.7 mg/kg in S-2 up to 65.7 mg/kg in S-4. The field chloride concentration in SC-1 was 40 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results
Sunray D #1 BGT Closure, January 2014

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
NMOCD Action L	evel (NMAC 19.	.15.17.13E)		100	250
S-1	1/17/14	0.5	0.9	24.7	NA
S-2	1/17/14	0.5	0.2	20.7	NA
S-3	1/17/14	0.5	0.2	41.9	NA
S-4	1/17/14	0.5	0.1	65.7	NA
S-5	1/17/14	0.5	0.2	45.9	NA
SC-1	1/17/14	0.5	0.2	NA	40

NA - not analyzed

Crystal Tafoya Sunray D #1 BGT Closure Report February 12, 2014 Page 4 of 5

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.038 mg/kg and 0.191 mg/kg, respectively. The laboratory chloride concentration was reported below the laboratory detection limit of 30 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. The laboratory analytical report is attached.

Table 2. Soil Laboratory Analytical Results
Sunray D #1 BGT Closure, January 2014

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
	NMOCD Action Level (NMAC 19.15.17.13E)		0.2	50	1	00	250
SC-1	1/17/14	0.5	<0.038	<0.191	NA	NA	<30

NA - not analyzed

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations were below the NMOCD action level of 100 mg/kg, with the highest concentration reported in S-4 with 65.7 mg/kg. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended at Sunray D #1.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

David J. Reese

Environmental Scientist

Elizabeth o MiNdly

Dail g Rem


Elizabeth McNally, P.E.


Crystal Tafoya Sunray D #1 BGT Closure Report February 12, 2014 Page 5 of 5

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, January 2014 AES Field Screening Report 011714 Hall Analytical Report 1401756

R:\Animas 2000\Dropbox\0000 Animas Server Dropbox EM\2014 Projects\ConocoPhillips\Sunray D #1\Sunray D #1 BGT Closure Report 021214.docx

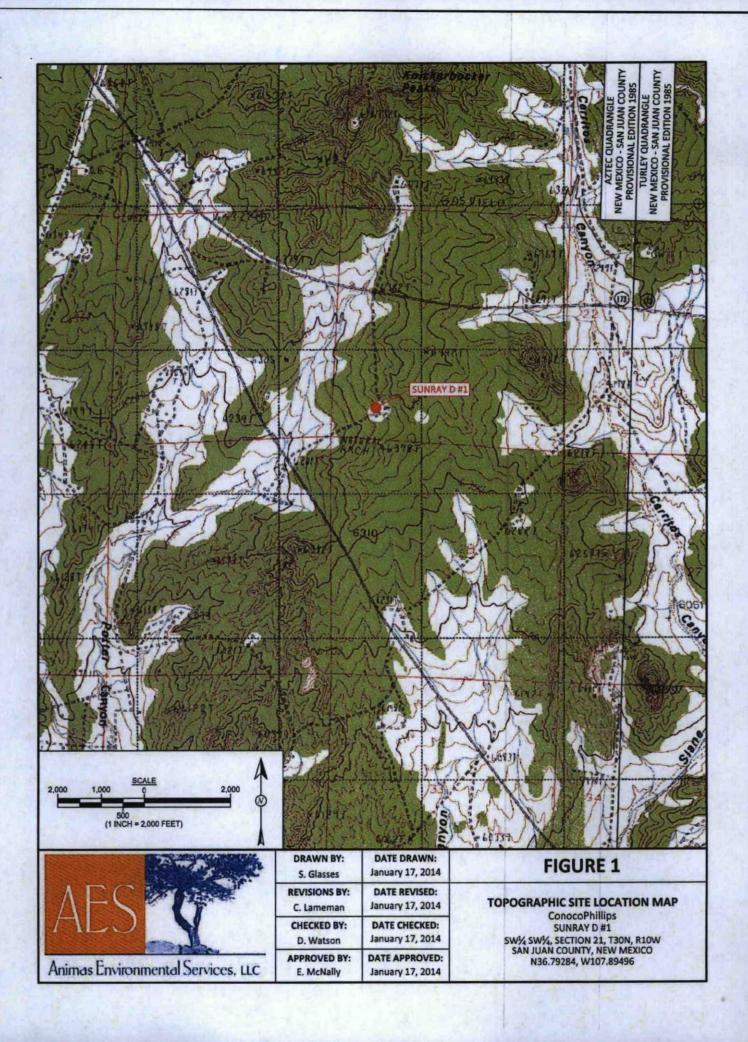

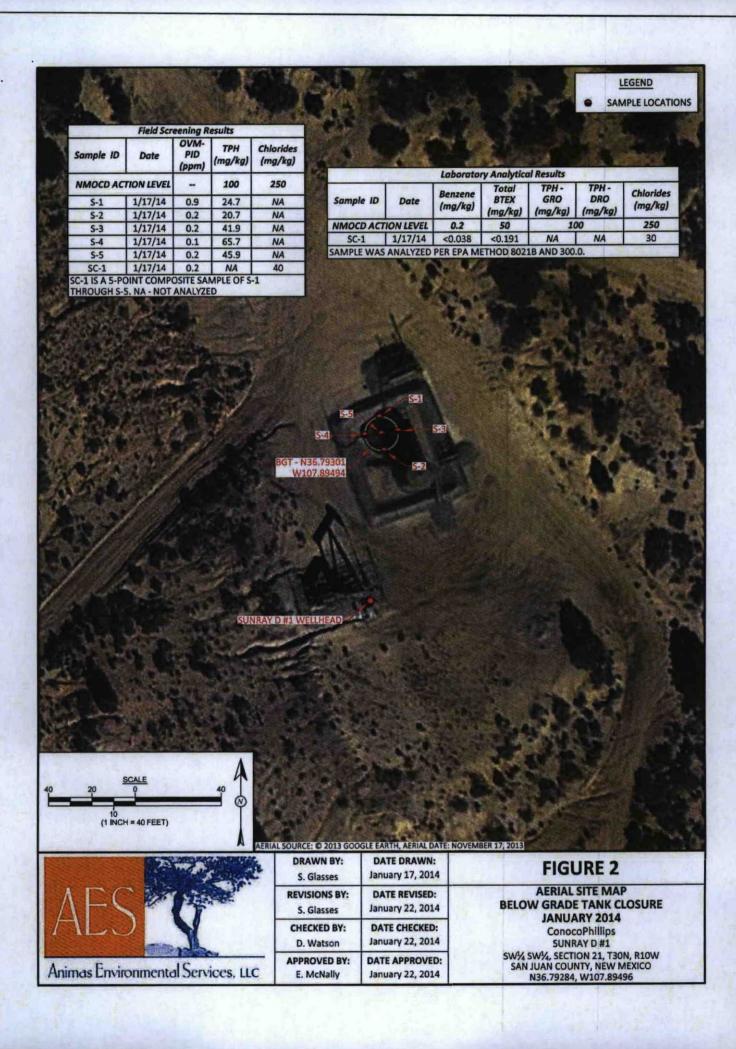

AES Field Screening Report

Client: ConocoPhillips

Project Location: Sunray D #1

Date: 1/17/2014

Matrix: Soil



Animas Environmental Services, LLC

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

Sample ID	Collection Date	Time of Sample Collection	Sample Location	OVM (ppm)	Field Chloride (mg/kg)	Field TPH Analysis Time	Field TPH* (mg/kg)	TPH PQL (mg/kg)	DF	TPH Analysts Initials
S-1	1/17/2014	9:45	North	0.9	NA	10:28	24.7	20.0	1	DAW
S-2	1/17/2014	9:46	South	0.2	NA	10:30	20.7	20.0	1	DAW
S-3	1/17/2014	9:47	East	0.2	NA	10:33	41.9	20.0	1	DAW
S-4	1/17/2014	9:48	West	0.1	NA	10:36	65.7	20.0	1	DAW
S-5	1/17/2014	9:50	Center	0.2	NA	10:39	45.9	20.0	1	DAW
SC-1	1/17/2014	9:55	Composite	0.2	40		Not.	Analyzed for Th	РН	

DF Dilution Factor
NA Not Analyzed

ND Not Detected at the Reporting Limit

PQL Practical Quantitation Limit

*Field TPH concentrations recorded may be below PQL.

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with Silver Nitrate Total Petroleum Hydrocarbons - USEPA 418.1

Analyst: Dubruh Wath_

Page 1

Report Finalized: 1/17/14

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-141
Revised August 8, 2011
Submit 1 Copy to appropriate District Office in

Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

			Rele	ease Notific	cation and C			al Report			
Name of Co	mpany Bi	rlington Re	sources			Denise Journey	Initia	Tribott 23 Timur Repe			
Address 34				M 87402		Telephone No. 505-326-9556					
Facility Nar			3 ,	I THE WALL		Facility Type Gas Well					
Surface Ow	ner Fe	deral		Mineral C	Owner Federal Le	ase # SF-078204	API No.	. 30-045-09295			
				THE STATE	ATION OF RE	VI COLD DESCRIPTION					
Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County			
М	21	30N	10W	990	South	990	West	San Juan			
				Latitude 36.	79301 Longit	ude107.89494					
				NAT	URE OF REI	EASE					
Type of Rele		BGT Closur	e Summar	у	A STATE OF THE PARTY OF	f Release n/a		ecovered n/a			
Source of Re		. 0				Hour of Occurrence	e Date and l	Hour of Discovery			
Was Immedia	ite Notice G		Yes 🗆	No Not Re	equired If YES, T	o Whom?					
By Whom?					Date and	Hour	No has been				
Was a Water	course Reac		Yes 🗵	No N/A	If YES, V	olume Impacting t	he Watercourse.				
N/A Describe Cau N/A Describe Are											
I hereby certi regulations a public health should their o	fy that the in I operators a or the envir operations ha ment. In ac	nformation g are required to onment. The ave failed to ddition, NMC	iven above o report are acceptance adequately OCD accep	nd/or file certain r ce of a C-141 report investigate and r	elease notifications ort by the NMOCD remediate contamina	and perform correct narked as "Final Retion that pose a three	tive actions for rele eport" does not reli- eat to ground water	uant to NMOCD rules and cases which may endanger eve the operator of liability surface water, human health ompliance with any other			
icuciai, state,) local law	vs and/or regi	mations.		TO THE	OIL CON	SERVATION	DIVISION			
Signature:		A TOWN	ray		Approved b	Environmental S	pecialist:				
Title: Staff	Regulatory	Technician			Approval D	nte:	Expiration I	Date:			
E-mail Addre	ss: Denise /20/2015			ps.com -326-9556	Conditions	of Approval:		Attached			

Legend SUNRAY D #1 New Mexico Natural Arch NM-37 Pillar Arch Center of Pit verified 3/20/15 Denise Journey 236.79301 -107.89494 Google earth 100 ft



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

January 21, 2014

Debbie Watson
Animas Environmental
624 East Comanche
Farmington, NM 87401
TEL: (505) 486-4071

FAX

RE: CoP Sunray D #1

OrderNo.: 1401756

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 1/18/2014 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. In order to properly interpret your results it is imperative that you review this report in its entirety. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. When necessary, data qualifers are provided on both the sample analysis report and the QC summary report, both sections should be reviewed. All samples are reported, as received, unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

ADHS Cert #AZ0682 -- NMED-DWB Cert #NM9425 -- NMED-Micro Cert #NM0190

Sincerely,

Andy Freeman

Laboratory Manager

andyl

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report

Lab Order 1401756

Date Reported: 1/21/2014

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental

1401756-001

CoP Sunray D #1 Project:

Lab ID:

Client Sample ID: SC-1

Collection Date: 1/17/2014 9:55:00 AM

Received Date: 1/18/2014 10:30:00 AM Matrix: MEOH (SOIL)

Analyses	Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 8021B: VOLATILES		MAG			Analyst	JMP
Benzene	ND	0.038	mg/Kg	1	1/20/2014 10:57:13 AM	R1617
Toluene	ND	0.038	mg/Kg	1	1/20/2014 10:57:13 AM	R1617
Ethylbenzene	ND	0.038	mg/Kg	1	1/20/2014 10:57:13 AM	R1617
Xylenes, Total	ND	0.077	mg/Kg	1	1/20/2014 10:57:13 AM	R1617
Surr: 4-Bromofluorobenzene	105	80-120	%REC	1	1/20/2014 10:57:13 AM	R1617
EPA METHOD 300.0: ANIONS					Analyst	: JRR
Chloride	ND	30	mg/Kg	20	1/20/2014 10:42:47 AM	11301

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- Holding times for preparation or analysis exceeded
- Not Detected at the Reporting Limit
 - Not Detected at the Reporting Limit Page 1 of 3 Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

P

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1401756 21-Jan-14

Client:

Animas Environmental

Project:

CoP Sunray D #1

Sample ID MB-11301

SampType: MBLK

TestCode: EPA Method 300.0: Anlons

Client ID: PBS

Batch ID: 11301

RunNo: 16191

Prep Date: 1/20/2014

Analysis Date: 1/20/2014

SeqNo: 466644

Units: mg/Kg

Analyte

PQL

SPK value SPK Ref Val %REC LowLimit

HighLimit

RPDLimit Qual

Chloride

ND

Result

14

Sample ID LCS-11301

Client ID: LCSS

SampType: LCS Batch ID: 11301 TestCode: EPA Method 300.0: Anions RunNo: 16191

Prep Date: 1/20/2014

Analysis Date: 1/20/2014

SeqNo: 466645

Units: mg/Kg HighLimit

%RPD

Analyte

1.5

SPK value SPK Ref Val %REC LowLimit 0

110

RPDLimit

Chloride

PQL 1.5

5.000

280

%RPD

Qual

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range E
- Analyte detected below quantitation limits
- RSD is greater than RSDlimit
- RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits
- Holding times for preparation or analysis exceeded
- Not Detected at the Reporting Limit
- Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

Analyte detected in the associated Method Blank

Page 2 of 3

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#: 1401756 21-Jan-14

Client:

Animas Environmental

Project:

CoP Sunray D #1

Sample ID MB-11281 MK Client ID: PBS	SampType: MBLK Batch ID: R16177			TestCode: EPA Method 8021B: Volatiles RunNo: 16177						
Prep Date:	Analysis Date: 1/20/2014		SeqNo: 466329			Units: mg/Kg				
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050	NAME OF TAXABLE PARTY.		1000	HIP	MENUTE I		1 - 178.5 %	
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	1.1		1.000		106	80	120			

Sample ID LCS-11281 MK	Samp	Type: LC	S	TestCode: EPA Method 8021B: Volatiles										
Client ID: LCSS	RunNo: 16177													
Prep Date:	Analysis [Analysis Date: 1/20/2014			SeqNo: 4	66330	Units: mg/F	(g						
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual				
Benzene	1.1	0.050	1.000	0	106	80	120		226					
Toluene	1.0	0.050	1.000	0	105	80	120							
Ethylbenzene	1.1	0.050	1.000	0	107	80	120							
Xylenes, Total	3.2	0.10	3.000	0	106	80	120							
Surr: 4-Bromofluorobenzene	1.1		1.000		110	80	120							

Sample ID MB-11281	Tes	tCode: E	PA Method	8021B: Volat	tiles					
Client ID: PBS	F	RunNo: 16177								
Prep Date: 1/17/2014	Analysis Date: 1/20/2014				SeqNo: 4	66332	Units: %RE	С		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Surr: 4-Bromofluorobenzene	1.1		1.000		106	80	120			District Control

Sample ID LCS-11281	TestCode: EPA Method 8021B: Volatiles									
Client ID: LCSS	Batch	n ID: 11	281	F						
Prep Date: 1/17/2014	Analysis Date: 1/20/2014				SeqNo: 4	66333	Units: %RE	C		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Surr: 4-Bromofluorobenzene	1.1		1.000		110	80	120	31/17/20		

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- P Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

Page 3 of 3



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 Sample Log-In Check List

Website: www.hallenvironmental.com

Client Name: Animes Environmental Work Order Number	1401756		RoptNo: 1
Received by Models: Mg 01/18/14			
ogged By: Michelle Garcia 1/18/2014 10:30:00 A	М	Misse Gan	<u>ان</u>
Completed By: Michelle Garcia 1/18/2014 11:24:47 A	м	Mirel Gar	<u></u>
Personned By: My 01/18/14			
thein of Custody			
1. Custody seeks intact on sample bottles?	Yes !	No :	Not Present ✓
2. le Chain of Custody complete?	Yes M	No L	Not Present i.]
3. How was the sample delivered?	Courier		
Log In			
4. Was an attempt made to cool the samples?	Yes 🕅	No IT:	M'
5. Were all samples received at a temperature of >0° C to 6.0°C	Yes W.	No :	NA .
6. Sample(s) in proper container(s)?	Yes M	No J	
7. Sufficient sample volume for indicated test(s)?	Yes Mi	No 🗆	
8, Are samples (except VOA and ONG) properly preserved?	Yes 🗹	No 🗔	
9. Was preservative added to bottles?	Yes []	No 🗹	
10.VOA viels have zero headapace?	Yes ! !	No 1.3	No VOA Viels 🗸
11. Were any sample containers received broken?	Yes	No V	# of preserved bottles checked
12. Does peperwork metch bottle labels? (Note discrepancies on chain of custody)	Yes W	No	for pH: (<2 or >12 unless note
13, Are matrices correctly identified on Chain of Custody?	Yes M	No 🛄	Adjusted?
14, is it clear what analyses were requested?	Yes 🗹	No 🗆	
15. Were all holding times able to be met? (If no, notify customer for authorization.)	Yes 🗹	No 🗔	Checked by:
Special Handling (if applicable)			
16. Was client notified of all discrepancies with this order?	Yes [!	No ! !	NA V
Person Notified: Date: By Whom: Via: Regarding:	The second second	Phone ; Fex	In Person
Client Instructions:			
17. Additional remarks:			

Client: Ahlimus Environmental Services UL Mailing Address: 62+ Ecomanche Farmington NM 8740 Phone #: 505 56+ 2781				Project Name: CoP - Sunvay D#:				HALL ENVIRONMENTAL ANALYSIS LABORATORY www.hallenvironmental.com 4901 Hawkins NE - Albuquerque, NM 87109 Tel. 505-345-3975 Fax 505-345-4107													
email of QA/QC I Stan Accredi	Package: dard tation		□ Level 4 (Full Validation)	Project Mana D . W Sampler: D	atson:		(8021)	TPH (Gas only)	/ DRO / MRO)	(1)	270 SIMS)		NO2,PO4,SO4)	8082 PCB's		THE RESERVE	Š.		2		
Date		□ Other Matrix	Sample Request ID	Sample Tem Container Type and #	Preservative Type	HEAL NO.	BTEX FEET F	BTEX + MTBE + TPH (Gas only)	TPH 8015B (GRO / DRO / MRO	EDB (Method 504.1)	PAH's (8310 or 8270 SIMS)	RCRA 8 Metals	Anions (F,CI,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄)	8061 Pesticides / 8062 PCB'	8260B (VOA)	8270 (Semi-VOA)	300.0 Chloride		Air Bubbles (Y or N)		
1714	0155	Soil	Sc-I	1-407	Madt	-@1	X										メ				
rette: 7/14 atd: 1/14	1/2U Time: 1/0	Mus	d by: wh Wath d by: the Walls the balls the both the sub-	Received by: Church Received by: Church Received by:	ubalk u Gr	Date Time	WO	o: 1	035	M to	Ö		84 10: 10:	Bu	Final	a shu	Te	gallo y Ri	idder		

BURLINGTON RESOURCES

ConocoPhillips

SUNRAY D #1
FORMATION MV/DK

LATITUDE N 36° 47.6 LONGITUDE W 107° 53.7

990' FSL 990' FWL
SEC. 21 T030N R010W
LEASE NO. NMSF-078204 ELEV. 635'
API NO. 30-045-09295
SAN JUAN COUNTY, NEW MEXICO
EMERGENCY NUMBER (505) 324-5170

