

GL 5831'
KB 11'

JOHNSON 1-1H
AP# 30-045-35689

TOL @ 2501' MD

Surface Casing

12 1/4" hole
9 5/8", 36#, K55 @ 315' MD

Tubing String

Perf Sub 2 1/4", 6.4#, J55, bull plugged
Tbg 2 1/4", 6.4#, J55, 1 jt
Perf Sub 2 1/4", 6.4#, J55
F Nipple 2 1/4" / 2.28" ID
Tbg 2 1/4", 6.4#, J55, 77 jts

Length (ft)

6.2
31
6.5
1
2432

OIL CONS. DIV DIST. 3
OCT 08 2015

EOT @ 2489' (MD)

TOL @ 2501' MD / 2318' TVD (± 70 deg)


Production Casing

8 1/2" hole; TD 2678' MD / 2342' TVD; 93.04 deg
7", 23#, N80 @ 2668' MD / 2332' TVD

Liner perms 4930 - 4940' MD

Production Liner

6 1/8" hole
TD 5304' MD / 2318' TVD
4 1/2", 11.6#, L80 OH Packer system
Liner set @ 5295' MD / 2318' TVD

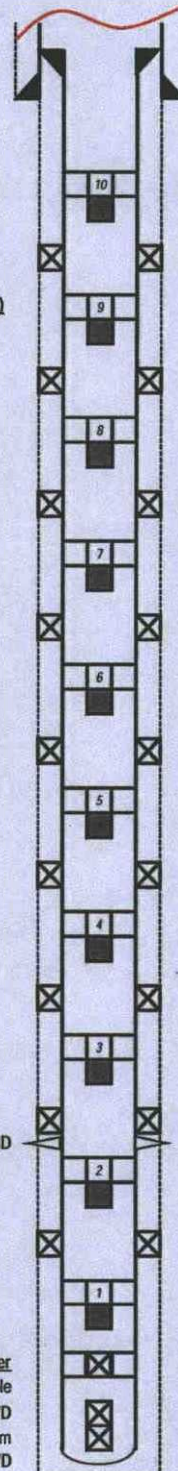

#	PackerMD	Port	Port MD
		10	2710
P8	2857	9	3001
P8	3148	8	3293
P7	3394	7	3538
P6	3685	6	3827
P5	3974	5	4116
P4	4263	4	4408
P3	4555	3	4654
P2	4801	2	4944
P1	5091	1	5233