

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-045-28170
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Gallegos Canyon Unit
8. Well Number 509
9. OGRID Number 000778
10. Pool name or Wildcat West Kutz Pictured Cliffs
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 5329'

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
BP America Production Company

3. Address of Operator
**737 North Eldridge Pkwy
Houston, TX 77079**

4. Well Location
 Unit Letter **D** : **978** feet from the **North** line and **1148** feet from the **West** line
 Section **28** Township **29N** Range **12W** NMPM County **San Juan**

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Please see the attached P&A operations performed December 2015.

OIL CONS. DIV DIST. 3

JAN 11 2016

Spud Date: **PNR only**
01/06/1991

Rig Release Date: Approved for plugging of wellbore only.
Liability under bond is retained pending
Receipt of C-103 (Subsequent Report of Well
Plugging) which may be found @ OCD web
page under forms
www.emnrd.state.us/ocd

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Toya Colvin* TITLE Regulatory Analyst DATE 01/06/2016

Type or print name Toya Colvin E-mail address: Toya.Colvin@bp.com PHONE: 281-366-7148

For State Use Only **DEPUTY OIL & GAS INSPECTOR**
 APPROVED BY: *Bob Red* TITLE DISTRICT #3 DATE 1/14/16

Conditions of Approval (if any):

RV

P&A Operations for the GCU 509 – December 2015

December 2015

12/22/2015- PLUG # 1 - SET CEMENT RETAINER AT 1,222' AND PUMP 29 SX OF 15.6# CLASS B CEMENT ON TOP OF RETAINER PLUG FROM 1222'-840' – TAGGED TOC @ 840'

12/28/2015- PLUG # 2 – PUMP 24 SX OF 15.6# CLASS B CEMENT FROM 252' – SURFACE, OBSERVED GOOD RETURNS AT SURFACE.

12/29/2015- USE POLY PIPE TO FILL TO SURFACE WITH 4 SX OF 15.6# CMT, CUT WELLHEAD AND SET P&A MARKER, R/D MOVE OFF LOCATION

Gallegos Canyon Unit #509

FINAL P&A WBS

West Kutz Pictured Cliffs

978' FNL, 1148' FWL, Section 28, T-29-N, R-12-W,

San Juan County, NM / API #30-045-28170

Lat 36.70222 / Long -108.10971

Today's Date: 12/29/15

Spud: 1/6/91

Completed: 2/18/91

Elevation: 5329' GI


8-3/4" hole

Kirtland @ 183'

Fruitland @ 933'

Pictured Cliffs @ 1272'

6.25" hole

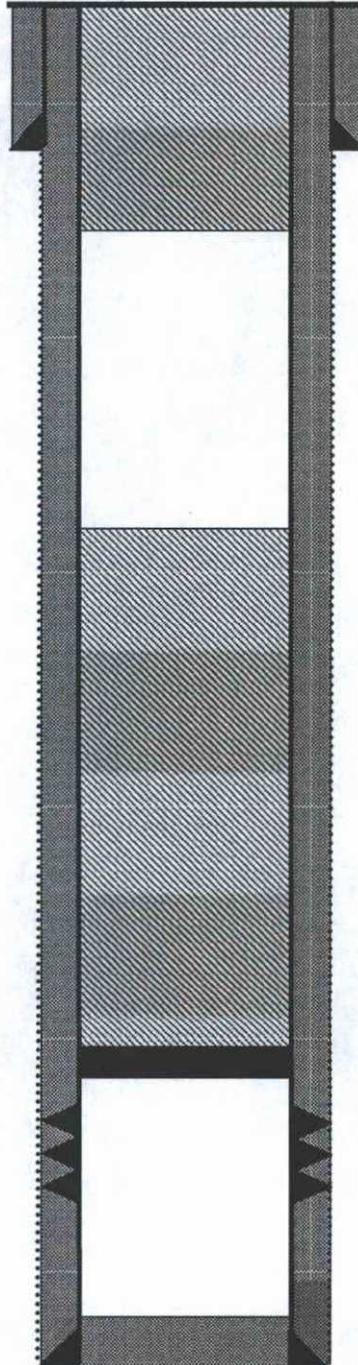

TOC @ Surface, circulated 18 bbls
To surface per sundry

7" 20#, K-55 Casing set @ 130'
Cement with 125 sxs (Circulated to Surface)

Plug #2: 252' - 0'
15.6# Class B cement, 24 sxs

Plug #1: 1222' - 840'
15.6# Class B cement, 29 sxs

Set CR @ 1222'

Pictured Cliffs Perforations:
1273' - 1289'

4.5", 10.5#, J-55 Casing set @ 1412'
Cement with 280 sxs (351 cf)
Circulate cement to surface

TD 1415'
PBSD 1363'