

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other: COAL BED METHANE		5. Lease Serial No. NOG98111310
2. Name of Operator COLEMAN OIL & GAS INCORPORATED Contact: MICHAEL T HANSON Mail: mhanson@cog-fmn.com		6. If Indian, Allottee or Tribe Name EASTERN NAVAJO
3a. Address FARMINGTON, NM 87499	3b. Phone No. (include area code) Ph: 505-327-0356 Ext: 106 Fx: 505-327-9425	7. If Unit or CA/Agreement, Name and/or No. NMNM102964
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 13 T26N R12W SESW 1035FSL 1665FWL		8. Well Name and No. SHAREN COM 1
		9. API Well No. 30-045-29925-00-S1
		10. Field and Pool, or Exploratory BASIN FRUITLAND COAL
		11. County or Parish, and State SAN JUAN COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Coleman Oil & Gas proposes to P&A this well per the attached procedure, Reclamation Plan and Field Sketch.

OIL CONS. DIV DIST. 3

OCT 17 2016

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

SEE ATTACHED FOR CONDITIONS OF APPROVAL

Notify NMOCD 24 hrs prior to beginning operations

14. I hereby certify that the foregoing is true and correct. Electronic Submission #353275 verified by the BLM Well Information System For COLEMAN OIL & GAS INCORPORATED, sent to the Farmington Committed to AFMSS for processing by JACK SAVAGE on 10/12/2016 (17JWS0004SE)	
Name (Printed/Typed) MICHAEL T HANSON	Title ENGINEER
Signature (Electronic Submission)	Date 09/30/2016

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>JACK SAVAGE</u>	Title <u>PETROLEUM ENGINEER</u>	Date <u>10/12/2016</u>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <u>Farmington</u>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

NMOCD *AV*

Coleman Oil & Gas, Inc.

Final P&A Procedure Basin Fruitland Coal Formation

Monday, September 30, 2016

Well:	Sharen Com #1	Field: Basin Fruitland Coal
SL Location:	1035 FSL 1665' FWL (SESW) Sec 13, T26N, R12W, NMPM San Juan County, New Mexico	Elevation: 6045' RKB 6040' GL
		Lease: NOG98111310
		API#: 30-045-29925

Fruitland Coal: 1212-1227, Producing.
Original PBTD at 1325 FT GL

Procedure: All cement volumes use 100% excess outside pipe and 50' excess inside. The stabilizing wellbore fluid will be 8.3 ppg, sufficient to balance all exposed formation pressures. All cement will be Class B, mixed at 15.6 ppg with a 1.18 cf/sx yield.
(Note: This procedure will be adjusted on site based upon actual conditions)

1. Review and Comply with Regulatory Requirements.
2. MIRU Well Service Rig and Equipment.
3. POOH with Rods & Pump.
4. Nipple up BOP equipment. Function test BOP.
5. Tag with Production Tubing. POOH and Tally Tubing.
6. RIH with Cement Retainer on tubing and set at \pm 1162 FT KB.
7. Place Minimum 10 sacks cement on top of retainer. **Might want to combine Plug #1 & Plug #2, due to close proximity of each other.**
8. Plug #2 Cement Fruitland Top from 881'-981' Inside 4 1/2" Casing with 12 sacks neat cement. Plug #2 inside plug based on Long String Cement to Surface. **Might want to combine Plug #1 & Plug #2, due to close proximity of each other.**
9. Attempt to pressure test Braden head annulus to 300 psig, note volume to load.
10. Plug #3 Cement Kirtland and Ojo Alamo Top and Surface Casing, 364' to surface. Fill the inside of the 4 1/2" casing from 364' to Surface.
11. Cut off well head and top off casing and annulus as necessary with cement.
12. Install dry hole marker, remove production equipment and reclaim location.

COLEMAN OIL GAS, INC.
Sharen Com #1 PRODUCING

SURFACE CASING
7" 20# J-55 LT&C @ 127 FT GL
CEMENTED WITH 60 SXS
CLASS B W/ 2% CAL CL 1/4 #/SX

PRODUCTION CASING
4-1/2" 10.50# J-55 LT&C @ 1370 FT GL
CEMENTED WITH 110 SXS LITE
TAIL WITH 50 SACKS REG.


**CEMENT CIRCULATED TO SURFACE
ON SUFACE & PRODUCTION CASING**

TUBING STRING
38 JTS 2-3/8 TBG 1224 FT
SEATING NIPPLE
1 JT 2-3/8 MA 32.72 FT.

Seating Nipple @ 1224 FT GL
Bottom of TBG @ 1257 FT GL

Fruitland Coal
Perforations @ 1212-1227

PBD @ 1325' FT. GL.
PIPE LANDED @ 1370' FT. GL.
T.D. @ 1370' FT. GL.

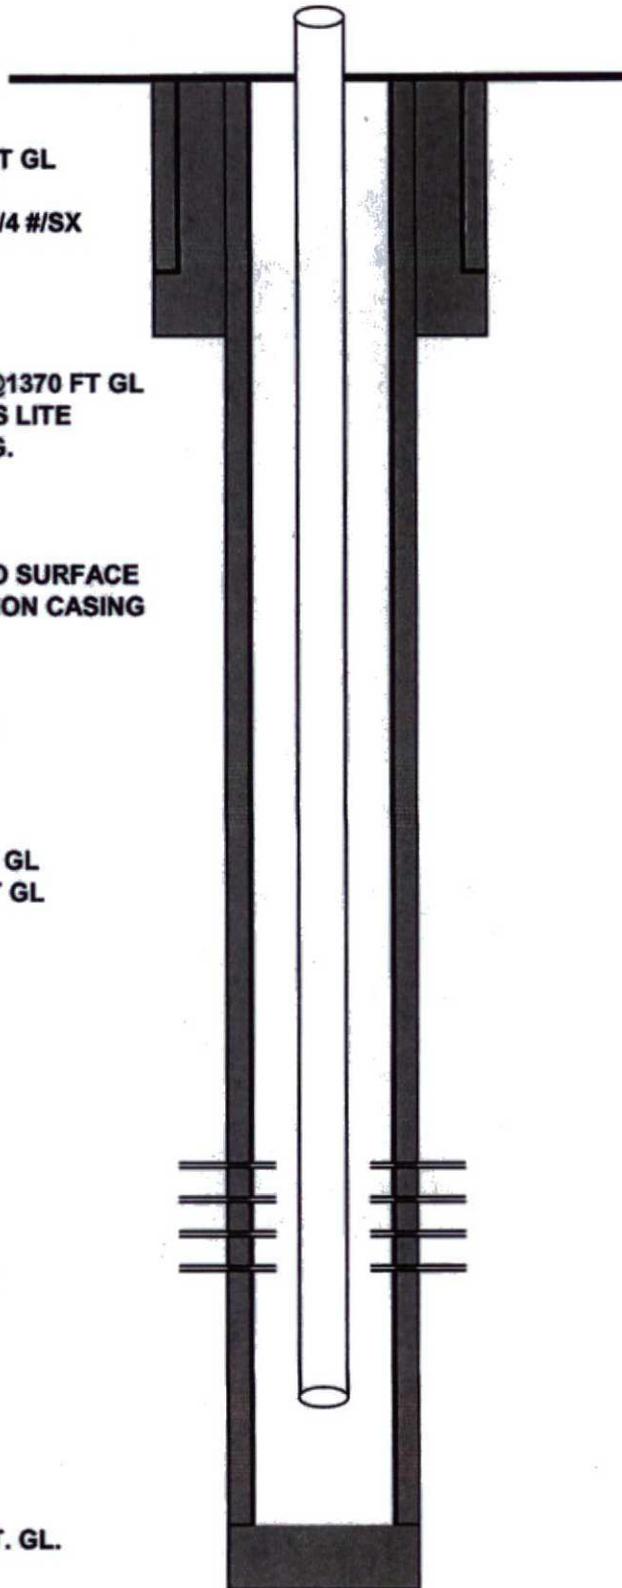

COLEMAN OIL GAS, INC.
Sharen Com #1 PROPOSED P&A

SURFACE CASING

7" 20# J-55 LT&C @ 127 FT GL
CEMENTED WITH 60 SXS
CLASS B W/ 2% CAL CL 1/4 #/SX

Plug #3 0-364
7" Set @ 127 FT GL
50 Sacks Cement

PRODUCTION CASING

4-1/2" 10.50# J-55 LT&C @ 1370 FT GL
CEMENTED WITH 110 SXS LITE
TAIL WITH 50 SACKS REG.

**CEMENT CIRCULATED TO SURFACE
ON SUFACE & PRODUCTION CASING**


Plug #2 881-981
Fruitland Top @ 931'
12 Sacks Cement

Retainer @ 1162

Plug #1 1112-1162
Fruitland Coal Perforations
10 Sacks Cement

Fruitland Coal
Perforations @ 1212-1227

PBTD @ 1325' FT. GL.
PIPE LANDED @ 1370' FT. GL.
T.D. @ 1370' FT. GL.

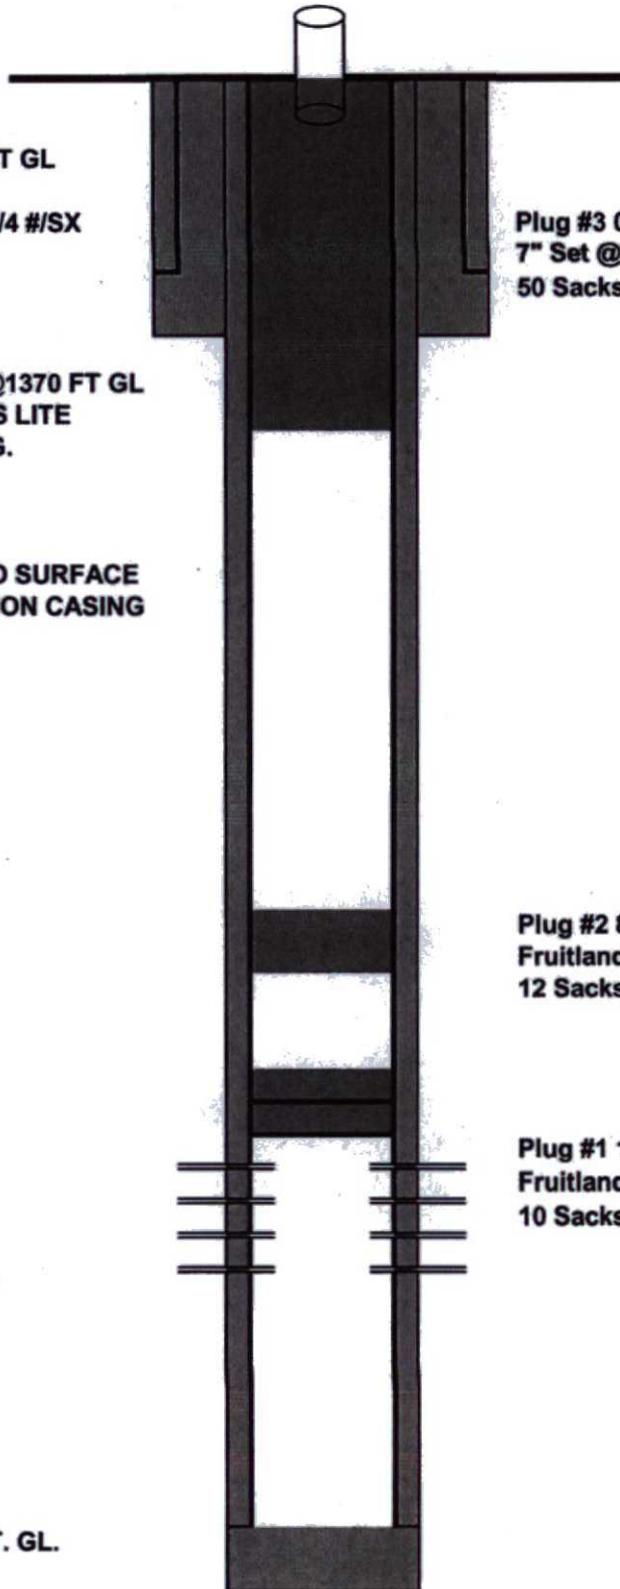

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402

Attachment to notice of
Intention to Abandon:

Re: Permanent Abandonment
Well: Sharen Com #1

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."

2. Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 564-7750.

3. The following modifications to your plugging program are to be made:

- a) Set Plug #1 (1280-1112) ft. to cover the Fruitland perforations and Pictured Cliffs top. **BLM picks top of Pictured Cliffs at 1230 ft.**
- b) Set Plug #2 (1006-906) ft. to cover the Fruitland top. **BLM picks top of Fruitland at 956 ft.**
- c) Set Plug #3 (408-0) ft. to cover the Kirtland top. **BLM picks top of Kirtland at 358 ft.**

OIL CONS. DIV DIST. 3
NOV 04 2016

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.