

# WELL SCHEMATIC

RIM Operating, Inc.  
Reya 2S

Location: 695' FSL, 1715' FEL, Sec. 20, T30N - R13W; San Juan, New Mexico


API: 30-045-34616

Field: Basin Fruitland Coal

GL: 5,453'

RKB: 5,462'

Depth      Formation

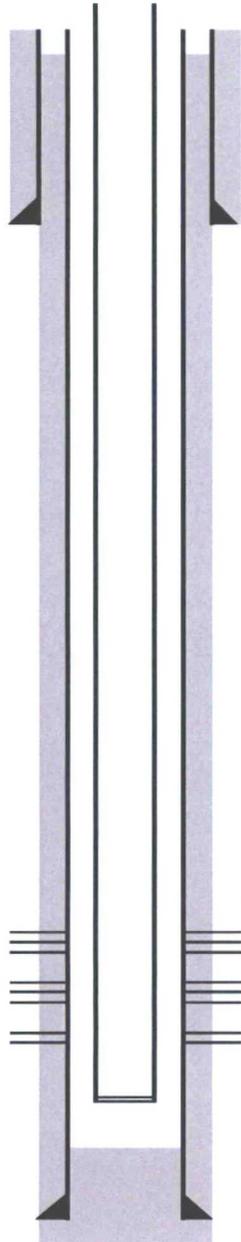

TOC at 48'

8-5/8", 24# set @143' in 12-1/4" OH  
M&P 145 sx Class B with 2% CC, 15.6 ppg, 1.18 yield

Tubing Detail	Length	Depth
KB	9.00'	
42 Joints 2-7/8"	1,305.54'	1,314.54'
SN	1.20'	1,315.74'
Perf Sub	4.00'	1,319.74'
Mud Anchor	30.65'	1,350.39'

Rod Detail	Length	Depth
KB	9.00'	
Polish Rod	18.00'	27.00'
Subs 2', 2', 4', 6', 8'	22.00'	49.00'
47 3/4" Rods	1,175.00'	1,224.00'
K-Bars	100.00'	1,324.00'
2" Pump		

1,082' Fruitland Coal

### Fruitland Coal

1,148'	1,150'	2'	8 shots	0.43" holes
1,192'	1,198'	6'	24 shots	0.43" holes
1,272'	1,280'	8'	32 shots	0.43" holes

250 gallons 15% HCL  
Frac with 45,000 lbs. sand

250 gallons 15% HCL  
N2 Frac with 65,300 lbs. and 448,00

1,286' Picture Cliffs

TD 1450'

PBTB at 1398'

5-1/2", 15.5#, J-55 landed at 1,439' in 7-7/8" OH  
Lead: 95 sx Class G with 3% Econolite, 11.8 ppg, 2.55 yield

NMOCD

MAY 11 2018

DISTRICT III