

State of New Mexico  
Energy, Minerals and Natural Resources Department

Susana Martinez  
Governor

Ken McQueen  
Cabinet Secretary

Matthias Sayer  
Deputy Cabinet Secretary

Heather Riley, Division Director  
Oil Conservation Division



New Mexico Oil Conservation Division approval and conditions listed below are made in accordance with OCD Rule 19.15.7.11 and are in addition to the actions approved by BLM on the following 3160-3 APD form.

Operator Signature Date: 1/16/18

Well information;

Operator Dagen, Well Name and Number Plat Unit 10 3

API# 30-045-35865 Section 10, Township 23N/S, Range 11 E/W

Conditions of Approval: (See the below checked and handwritten conditions)

- Notify Aztec OCD 24hrs prior to casing & cement.
- Hold C-104 for directional survey & "As Drilled" Plat
- Hold C-104 for NSL, NSP, DHC
- Spacing rule violation. Operator must follow up with change of status notification on other well to be shut in or abandoned
- Regarding the use of a pit, closed loop system or below grade tank, the operator must comply with the following as applicable:
  - A pit requires a complete C-144 be submitted and approved prior to the construction or use of the pit, pursuant to 19.15.17.8.A
  - A closed loop system requires notification prior to use, pursuant to 19.15.17.9.A
  - A below grade tank requires a registration be filed prior to the construction or use of the below grade tank, pursuant to 19.15.17.8.C
- Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
- Submit Gas Capture Plan form prior to spudding or initiating recompletion operations
- Regarding Hydraulic Fracturing, review EPA Underground Injection Control Guidance 84
- Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
- Well-bore communication is regulated under 19.15.29 NMAC. This requires well-bore Communication to be reported in accordance with 19.15.29.8.

Chad Herr  
NMOCD Approved by Signature

6-13-2018  
Date

ONSITE 12/15/17  
BLM surface

NMOCOD

MAY 31 2018

Form 3160-3  
(March 2012)

DISTRICT III  
UNITED STATES

DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

NOS: 12/15/17  
APDP: \_\_\_\_\_  
MP: \_\_\_\_\_  
SMA: BLM  
BOND: NM0140  
CA/PA: NM128992X

FORM APPROVED  
OMB No. 1004-0137  
Expires October 31, 2014

5. Lease Serial No.  
NMNM109404  
6. If Indian, Allottee or Tribe Name

1a. Type of work:  DRILL  REENTER  
1b. Type of Well:  Oil Well  Gas Well  Other CBNG  Single Zone  Multiple Zone

7. If Unit or CA Agreement, Name and No.  
NMNM128992X

8. Lease Name and Well No.  
PGA UNIT 10 3

2. Name of Operator  
DUGAN PRODUCTION CORPORATION

9. API Well No.  
30-045-35805

3a. Address  
709 E Murray Dr. Farmington NM 87401

3b. Phone No. (include area code)  
(505)325-1821

10. Field and Pool, or Exploratory  
BASIN FRUITLAND COAL / FRUITLAND

4. Location of Well (Report location clearly and in accordance with any State requirements.)\*  
At surface NWSW / 1802 FSL / 747 FWL / LAT 36.239054 / LONG -107.997867  
At proposed prod. zone NWSW / 1802 FSL / 747 FWL / LAT 36.239054 / LONG -107.997867

11. Sec., T. R. M. or Blk. and Survey or Area  
SEC 10 / T23N / R11W / NMP

14. Distance in miles and direction from nearest town or post office\*  
40 miles

12. County or Parish  
SAN JUAN  
13. State  
NM

15. Distance from proposed\* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)  
1802 feet

16. No. of acres in lease  
1278.58

17. Spacing Unit dedicated to this well  
320

18. Distance from proposed location\* to nearest well, drilling, completed, 802 feet applied for, on this lease, ft.

19. Proposed Depth  
750 feet / 750 feet

20. BLM/BIA Bond No. on file  
FED: NM0140

21. Elevations (Show whether DF, KDB, RT, GL, etc.)  
6272 feet

22. Approximate date work will start\*  
03/15/2018

23. Estimated duration  
5 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification
- 6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature (Electronic Submission) Name (Printed/Typed) Tyra Feil / Ph: (505)325-1821 Date 01/16/2018

Title

Authorized Representative

Approved by (Signature) [Signature] Name (Printed/Typed) Date 5/29/2018

Title AFM Office FARMINGTON

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

**BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS**

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

ACCEPTED FOR RECORD

JAN 17 2018

FARMINGTON FIELD OFFICE BY: [Signature]

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIRE NTS"

AV NMOCOD

District I  
1625 N. French Drive, Hobbs, NM 88240  
Phone (575) 393-6161 Fax (575) 393-0720

District II  
811 S. First Street, Artesia, NM 88210  
Phone (575) 748-1283 Fax (575) 749-9720

District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone (505) 334-6178 Fax (505) 334-6170

District IV  
1220 S. St. Francis Drive, Santa Fe, NM 87505  
Phone (505) 476-3460 Fax (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department

Form C-102  
Revised August 1, 2011

Submit one copy to  
Appropriate District Office

OIL CONSERVATION DIVISION  
1220 South St. Francis Drive  
Santa Fe, NM 87505

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number <b>30-045-35805</b>		*Pool Code <b>71629</b>	*Pool Name <b>BASIN FRUITLAND COAL</b>
*Property Code <b>321512</b>	*Property Name <b>PGA UNIT 10</b>		*Well Number <b>3</b>
*UGRID No. <b>006515</b>	*Operator Name <b>DUGAN PRODUCTION CORPORATION</b>		*Elevation <b>6272'</b>

<sup>10</sup> Surface Location

U. or lot no.	Section	Township	Range	Lot. Ecn.	Feet from the	North/South line	Feet from the	East/West line	County
L	10	23N	11W		1802	SOUTH	747	WEST	SAN JUAN


<sup>11</sup> Bottom Hole Location If Different From Surface

U. or lot no.	Section	Township	Range	Lot. Ecn.	Feet from the	North/South line	Feet from the	East/West line	County

\*Dedicated Acres: **320.0 Acres - W/2**

<sup>12</sup> Lease or Infill:  <sup>13</sup> Consolidation Code:  <sup>14</sup> Order No.:

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

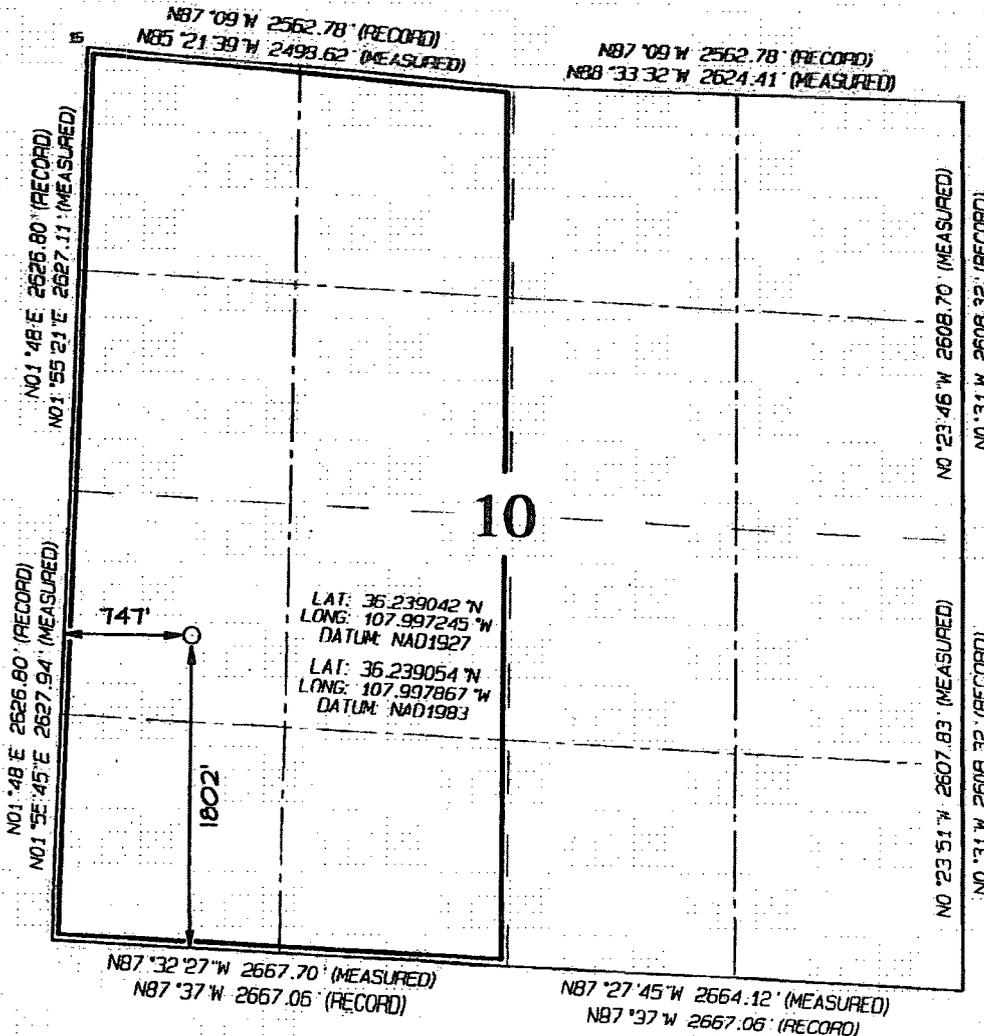

<sup>17</sup> OPERATOR CERTIFICATION


I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

*Kurt Fagrellius* 12/13/2017  
Signature Date  
Kurt Fagrellius  
Printed Name  
kfagrellius@duganproduction.com  
E-mail Address

<sup>18</sup> SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

Date Revised: NOVEMBER 9, 2017  
Date of Survey: OCTOBER 23, 2017  
Signature and Seal of Professional Surveyor

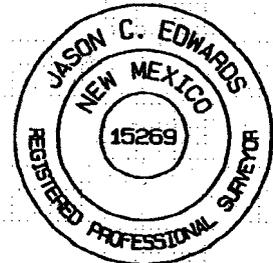

**JASON C. EDWARDS**  
Certificate Number 15269

EXHIBIT B.

Operations Plan

PGA Unit 10 #3

Lease #NM-109404

NWSW of Section 10, T23N, R11W

1802' FSL' FSL and 747' FWL

San Juan County, New Mexico

San Juan County, New Mexico

NMOC

JUN 08 2018

DISTRICT 100

1. APPROXIMATE FORMATION TOPS:

Kirtland	Surface
Fruitland	150'
Pictured Cliffs	567'
Total Depth	750'

Catch samples every 10 feet from 400-feet to total depth.

2. LOGGING PROGRAM:

Run cased hole GR-CCL-CNL from total depth to surface.

3. CASING PROGRAM:

Hole Size	Casing Size	Wt./ft.	Setting Depth	Grade and Condition
12-1/4"	8-5/8"	24#	120'	J-55
7-7/8"	5-1/2"	14#	750'	J-55

Plan to drill a 12-1/4" hole and set 120' of 8-5/8" OD, 24#, J-55 surface casing. Then plan to drill a 7-7/8" hole to total depth with gel-water mud program to test the Fruitland Coal. 5-1/2", 14#, J-55 production casing will be run and cemented. Cased hole GR-CCL-CNL log will be run. Productive zone will be perforated and fractured. After frac, the well will be cleaned out and production equipment will be installed.

4. CEMENTING PROGRAM:

Surface: Cement to surface with 110 sks (130 Cu.ft) Haliburton Halcem cement system (Class G cement) (15.8 lbs/gal, 1.174 Cu.ft/sk). Circulate cement to surface.

Production: Cement w/ 175 sks Halliburton Halcem Cement blend. (13.5 #/gal, 1.37 Cu.ft/sk, 5.78 gals/sk mix water) Class G w/ 50% Poz, 1% Bentonite, 5 lb/sk Kol-seal, 0.125 lb/sk Pol-E-Flake, 0.1% bwoc CFR3 and 2% CaCl<sub>2</sub>. Total Cement Volume 240 Cu.ft, 43 bbl Cement. Circulate cement to surface.

An adequate spacer will be pumped ahead of the cement slurry to help prevent mud contamination of the cement.

An adequate number of casing centralizers will be run through useable water zones to ensure that casing is centralized through these zones. The adequate number of centralizers will be determined based on API standards. Centralizers to impart a swirling action around the casing will be used just below and into the base of the lowest usable water zone. These devices will assist mud displacement, increase cement bonding potential and create an effective hydraulic seal. A chronological log will be kept which records the pump rate, pressure, slurry density and slurry volume for the cement job. The log will be sent to the BLM after completion of the job.

5. **Maximum Anticipated Bottom Hole Pressure** - 300 psi.
6. **Drilling Fluid** - will be fresh water with bentonite 8.9#/gal.
7. **WELLHEAD EQUIPMENT:**
  - Huber 8-5/8"x5-1/2" casing head, 1000# WP, tested to 2000#. Huber 5-1/2"x2-7/8" tubing head, 1000# WP, tested to 2000#.
8. **Blow-Out Preventer Equipment (BOPE): Exhibit 7.**
  - Annular preventer, double ram, or 2 rams with one being blind and one being a pipe ram.
  - Kill line (2" minimum)
  - 1 kill line valve (2" minimum)
  - 1 choke line valve
  - 2 adjustable chokes
  - Upper kelly cock valve with handle available.
  - Safety valve and subs to fit all drill string connections in use.
  - Pressure gauge on choke manifold.
  - 2" minimum choke line.
  - Fill-up line.

Working pressure for all BOPE will be 2,000-psi or greater. Will test BOPE (blind rams, pipe rams, choke manifold and surface casing) separately. Each test will include a low pressure test to 250-psig held for five minutes and a high pressure test to 800-psig held for thirty minutes (with no more than a 10-percent pressure drop during the duration of the tests). If a 10-percent or greater pressure drop occurs; a packer will be run to isolate the surface casing and BOPE to locate the source of the leak.

9. **Contacts:** Dugan Prod. Corp. Office & Radio Dispatch:

(505) 325-1821

Gerald Wright

Kurt Fagrelus

John Alexander

(505) 632-5150 (H)

(505) 325-4327 (H)

(505) 325-6927 (H)

(505) 330-9585 (M)

(505) 320-8248 (M)

(505) 320-1935 (M)

Operator Name: DUGAN PRODUCTION CORPORATION

Well Name: PGA UNIT 10

Well Number: 3

### Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead	1	0	120	110	1.17	15.8	130		Halliburton Halcem cement system	none

PRODUCTION	Lead	120	120	750	175	1.37	13.5	240		Halliburton Halcem cement system	50% Poz, 1% Bentonite, 5 lb/sk Kol-seal, 0.125 lb/sk Pol-E-FLake, 0.1% bwoc CFR3, and 2% CaCl2
------------	------	-----	-----	-----	-----	------	------	-----	--	----------------------------------	------------------------------------------------------------------------------------------------

### Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: BOP and a sufficient amount of gel, starch and Barite to control all conditions.

Describe the mud monitoring system utilized: A closed-loop drilling system will be used to contain all liquids and solids waste associated with the drilling operations. 1) System will be designed and maintained to prevent contamination of fresh water and protect wildlife, public health and the environment. 2) Stockpile topsoil prior to leveling well pad and digging pit. The topsoil will be kept separate from subsoil and used as a final cover for interim reclamation of the pit and well pad. 3) A pit approximately 45 feet long by 12 feet wide and 3 feet deep with vertical sidewalls will be constructed. The pit will be constructed with a firm foundation and interior slopes, smooth and free of rocks or sharp edges. 4) An open-top steel tank approximately 40 feet long by 10 feet wide and 4 feet deep with internal baffles will be set in the pit and used to separate solids from the drilling fluids. 5) An upright, 400 bbl tank will be set adjacent to the open top steel tank and used for circulation and storage of drilling fluids. 6) an upright, 400 bbl tank will be set adjacent to the circulation/storage tank and used for storage of fresh water. 7) Diversionary berms, ditches or sloping will be constructed to prevent surface run-off from flowing into pit. 8) Sub-surface soil will be used to construct a 1 foot tall berm around the perimeter of the pit to prevent surface run-off from entering the pit. B. Solids - all accumulated solids (cuttings) in the open-top steel tank and circulating tank will be removed by a vacuum truck and hauled daily to the Industrial Ecosystem Inc. (IEI) landfarm for disposal. C. Liquids - all liquids (drilling fluids) from the closed loop system will be transferred to the next well in the drilling program for re-use or hauled to Basin Disposal for disposal. All flowback water recovered during completion operations will be collected in a steel storage tank and disposed of at either Basin Disposal or IEI waste disposal facilities. D. Spills - any spills of non-freshwater liquid will be reported to the Farmington Field Office of the BLM and the New Mexico Oil Conservation Division District office within 48 hours. The spill will be cleaned up immediately and transferred to either Basin Disposal or IEI waste disposal facilities. E. Sewage - portable toilets will be used to collect and contain human sewage. Toilets will be onsite during drilling

**Operator Name:** DUGAN PRODUCTION CORPORATION

**Well Name:** PGA UNIT 10

**Well Number:** 3

and completion activity. The toilet holding tanks will be pumped as needed and the contents disposed of at an approved sewage disposal facility. F. Trash - portable dumpsters will be used to collect and contain garbage and other waste material and will be onsite during drilling and completion activity. The contents of the dumpsters will be removed as needed and disposed of at an approved waste disposal facility. G. After the drilling and completion rigs and the portable toilet and dumpsters are removed from the location, Dugan will be responsible for any clean-up of location necessary. Also, the area will be maintained free of trash and debris for the life of the well. H. During the drilling, completion and production of the well, there will not be any chemicals subject to reporting under SARA Title III greater than 10,000 pounds in weight, used, produced, stored, transported or disposed of annually at the well site. I. During the drilling, completion and production of the well, there will not be any extremely hazardous substances as defined in 40 CFR 355 used, produced, stored, transported or disposed of at the well site.

### Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
120	750	WATER-BASED MUD	8.9	8.9	66.6		7		1500	10	

### Section 6 - Test, Logging, Coring

**List of production tests including testing procedures, equipment and safety measures:**

A 3-step test will be conducted and the well will be placed into production.

**List of open and cased hole logs run in the well:**

CNL,GR

**Coring operation description for the well:**

Samples will be caught every 10 feet from 400 feet to total depth

### Section 7 - Pressure

**Anticipated Bottom Hole Pressure:** 300

**Anticipated Surface Pressure:** 49.19

**Anticipated Bottom Hole Temperature(F):** 68

**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO

**Describe:**

**Contingency Plans geohazards description:**


**Contingency Plans geohazards attachment:**

**Hydrogen Sulfide drilling operations plan required?** NO

# Well Control Equipment Schematic for 2,000 psi BOP


EXHIBIT 7.

## BOP Stack

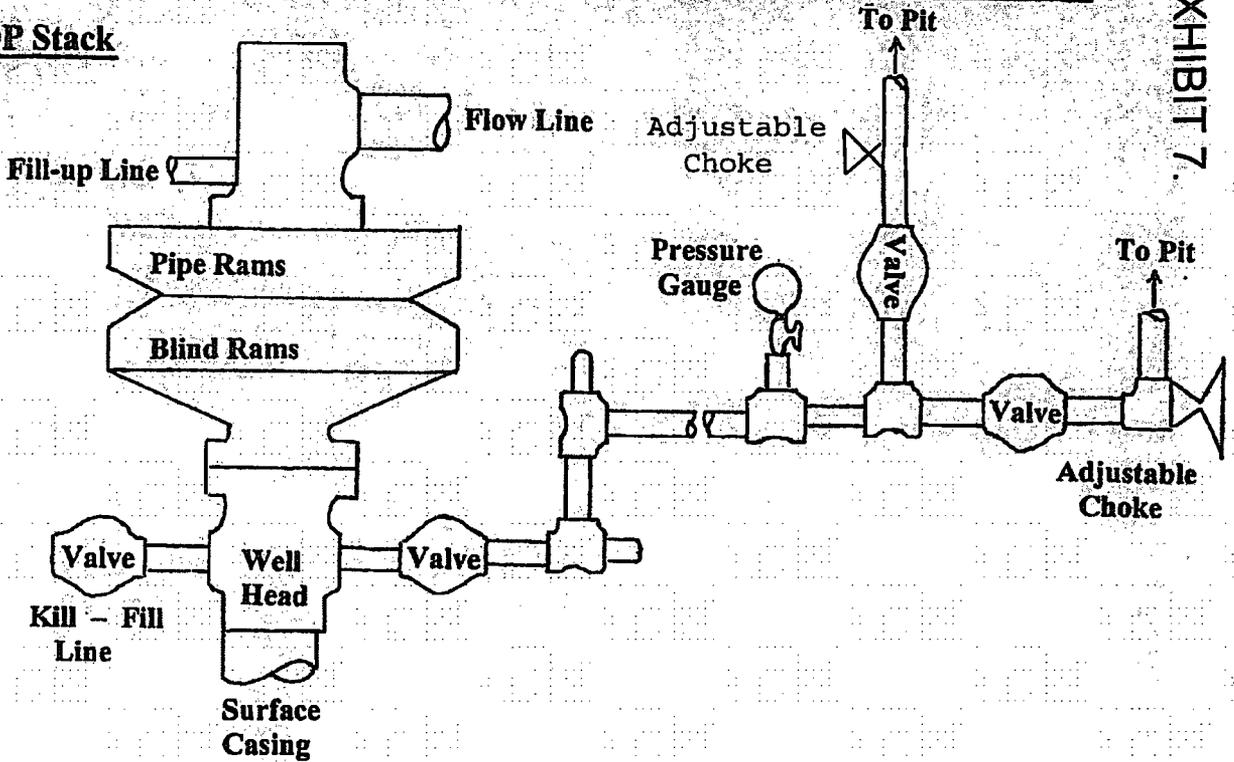

## Choke & Kill

### Manifold

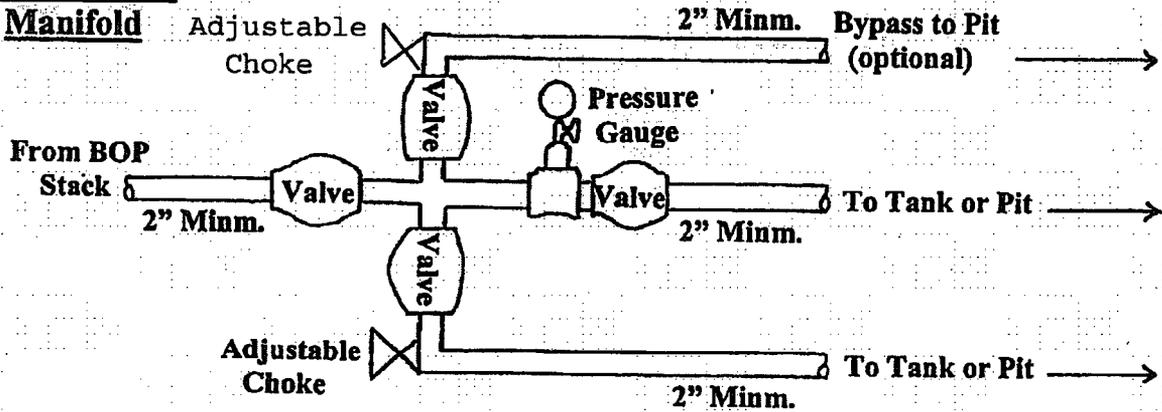


Working Pressure for all equipment is 2,000 psi or greater

**DUGAN PRODUCTION CORP.**  
PGA 10 #3

# Well Control Equipment Schematic for 2,000 psi BOP


EXHIBIT 7.

## BOP Stack

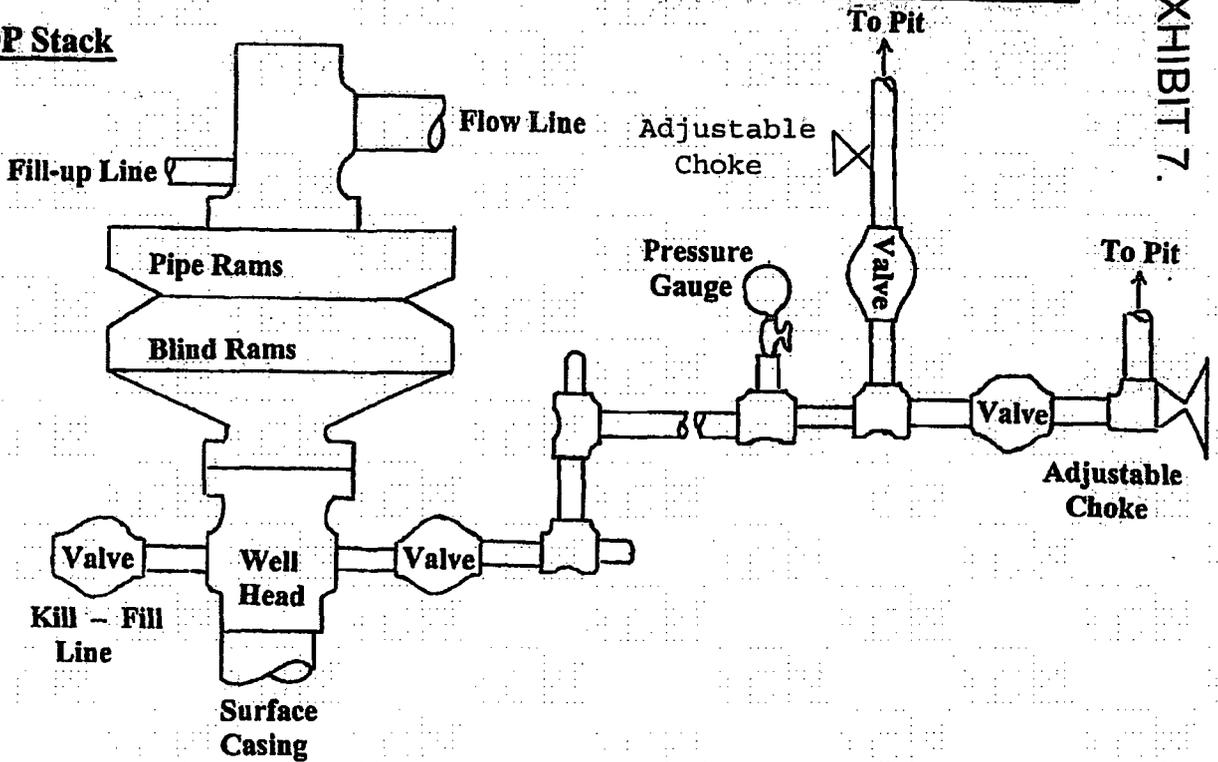

## Choke & Kill

### Manifold

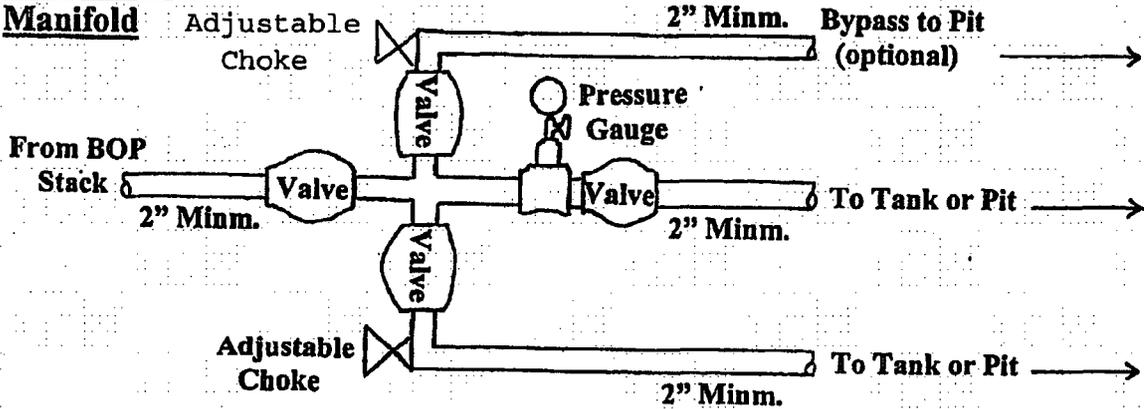

Working Pressure for all equipment is 2,000 psi or greater

**DUGAN PRODUCTION CORP.**  
PGA 10 #3

**Directions from the Intersection of US Hwy 550 & US Hwy 64**  
**in Bloomfield, NM to Dugan Production Corporation PGA Unit 10 #3**  
**1802' FSL & 747' FWL, Section 10, T23N, R11W, N.M.P.M., San Juan County, NM**  
**Latitude: 36.239054°N Longitude: 107.997867°W Datum: NAD1983**

From the intersection of US Hwy 550 & US Hwy 64 in Bloomfield, NM, travel Southerly on US Hwy 550 for 27.9 miles to State Hwy #57 @ Mile Marker 123.4;

Go Right (South-westerly) on State Hwy #57 for 3.2 miles to fork in roadway;

Go Left (South-westerly) remaining on State Hwy #57 for 2.6 miles to fork in roadway;

Go Right (Westerly) exiting State Hwy #57 onto County Road #7635 for 0.9 miles to fork in roadway;

Go Left (Southerly) remaining on County Road #7635 for 1.4 miles to fork in roadway;

Go Right (Westerly) exiting County Road #7635 onto County Road #7515 for 0.7 miles to fork in roadway;

Go Left (South-westerly) exiting County Road #7515 onto existing roadway for 1.4 miles to fork in roadway;

Go Right (Westerly) for 2.0 miles to fork in roadway;

Go Left (Westerly) which is straight for 0.2 miles to fork in roadway;

Go Right (Westerly) which is straight for 2.5 miles to cattle guard at corral;

Go Left (Southerly) for 1.6 miles to begin proposed access on left-hand side of roadway which continues for 757.7' to staked Dugan PGA Unit 10 #3 location.