

State of New Mexico
Energy, Minerals and Natural Resources Department

Susana Martinez
Governor

Ken McQueen
Cabinet Secretary

Matthias Sayer
Deputy Cabinet Secretary

Heather Riley, Division Director
Oil Conservation Division



New Mexico Oil Conservation Division approval and conditions listed below are made in accordance with OCD Rule 19.15.7.11 and are in addition to the actions approved by BLM on the following 3160-3 APD form.

Operator Signature Date: 7/17/2018

Well information;

Operator Enduring, Well Name and Number Rodex Unit 509H

API# 30-045-35880, Section 25, Township 23 N/S, Range 9 E/W

Conditions of Approval: (See the below checked and handwritten conditions)

- ☒ Notify Aztec OCD 24hrs prior to casing & cement.
- ☒ Hold C-104 for directional survey & "As Drilled" Plat
- ☒ Hold C-104 for NSL, NSP, DHC
- ☐ Spacing rule violation. Operator must follow up with change of status notification on other well to be shut in or abandoned
- ☐ Regarding the use of a pit, closed loop system or below grade tank, the operator must comply with the following as applicable:
 - A pit requires a complete C-144 be submitted and approved prior to the construction or use of the pit, pursuant to 19.15.17.8.A
 - A closed loop system requires notification prior to use, pursuant to 19.15.17.9.A
 - A below grade tank requires a registration be filed prior to the construction or use of the below grade tank, pursuant to 19.15.17.8.C
- ☐ Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
- ☐ Submit Gas Capture Plan form prior to spudding or initiating recompletion operations
- ☒ Regarding Hydraulic Fracturing, review EPA Underground Injection Control Guidance 84
- ☒ Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
- ☒ Well-bore communication is regulated under 19.15.29 NMAC. This requires well-bore Communication to be reported in accordance with 19.15.29.8.

Charlita
NMOCD Approved by Signature

8-29-2018
Date

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

5. Lease Serial No.
NMNM120377

6. If Indian, Allottee or Tribe Name

1a. Type of work: ☒ DRILL ☐ REENTER

7. If Unit or CA Agreement, Name and No.
NMNM136328A

1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☐ Single Zone ☒ Multiple Zone

8. Lease Name and Well No.
RODEO UNIT 509H

2. Name of Operator
ENDURING RESOURCES LLC

9. API Well No.
30-045-35880

3a. Address
1050 17TH ST STE 2500 DENVER CO 80265

3b. Phone No. (include area code)
(505)386-8205

10. Field and Pool, or Exploratory
BASIN MANCOS / MANCOS

4. Location of Well (Report location clearly and in accordance with any State requirements.)*

At surface **H** SENE / 1501 FSL / 426 FEL / LAT 36.200941 / LONG -107.73297

At proposed prod. zone **O** SWSE / 330 FSL / 2300 FEL / LAT 36.176997 / LONG -107.703452

11. Sec., T. R. M. or Blk. and Survey or Area
SEC 25 / T23N / R9W / NMP

14. Distance in miles and direction from nearest town or post office*
37 miles

12. County or Parish
SAN JUAN

13. State
NM

15. Distance from proposed*
location to nearest
property or lease line, ft.
(Also to nearest drig. unit line, if any)
20 feet

16. No. of acres in lease
643.12

17. Spacing Unit dedicated to this well
1604.85

NMOCD

18. Distance from proposed location*
to nearest well, drilling, completed, 426 feet
applied for, on this lease, ft.

19. Proposed Depth
4325 feet / 16255 feet

20. BLM/BIA Bond No. on file
FED: NMB001492

AUG 22 2018

DISTRICT III

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
6883 feet

22. Approximate date work will start*
09/01/2018

23. Estimated duration
30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature
(Electronic Submission)

Name (Printed/Typed)
Lacey Granillo / Ph: (505)636-9743

Date
07/17/2018

Title
Permitting Specialist

Approved by (Signature)

Name (Printed/Typed)

Richard A Fields

Date
8/20/18

Title
Field Manager

Office
FARMINGTON

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

DRILLING OPERATIONS
AUTHORIZED ARE SUBJECT TO
COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS"

BLM'S APPROVAL OR ACCEPTANCE OF
THIS ACTION DOES NOT RELIEVE THE
LESSEE AND OPERATOR FROM
OBTAINING ANY OTHER AUTHORIZATION
REQUIRED FOR OPERATIONS ON
FEDERAL AND INDIAN LANDS

This action is subject to technical
and procedural review pursuant to
43 CFR 3165.3 and appeal
pursuant to 43 CFR 3165.4

NMOCD

District I
1625 N French Drive, Hobbs, NM 88240
Phone (505) 393-6161 Fax (505) 393-0750

District II
811 S First Street, Artesia, NM 88210
Phone (505) 748-1263 Fax (505) 748-9720

District III
1000 Rio Brazos Road Aztec, NM 87410
Phone (505) 334-6178 Fax (505) 334-6170

District IV
1220 S St. Francis Drive Santa Fe, NM 87505
Phone (505) 476-3460 Fax (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with the owner of such a mineral or working interest or to a voluntary pooling agreement or a community pooling order heretofore filed with the Division.

Signature: *[Signature]* Date: 7/18/18
Name: Jason Granillo
Printed Name: jgranillo@enduringresources.com
E-mail Address:

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plot was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

Date Revised: JUNE 25, 2018
Survey Date: AUGUST 24, 2017

Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number: 15269

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30-045-35880		*Pool Code 97232	*Pool Name BASIN MANCOS
*Property Code 321253	*Property Name RODFO UNIT		*Well Number 509H
*OGRIID No 372286	*Operator Name ENDURING RESOURCES, LLC		*Elevation 6883


19 Surface Location

Lot or Lot No.	Section	Township	Range	Lot No.	Feet from the	North/South Line	Feet from the	East/West Line	County
H	25	23N	9W		1501	NORTH	426	EAST	SAN JUAN

20 Bottom Hole Location If Different From Surface

Lot or Lot No.	Section	Township	Range	Lot No.	Feet from the	North/South Line	Feet from the	East/West Line	County
0	32	23N	8W		330	SOUTH	2300	EAST	SAN JUAN
*Measured Area					*Acres (if known)				
1604.85					R 14313				

NO ALLOWANCE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

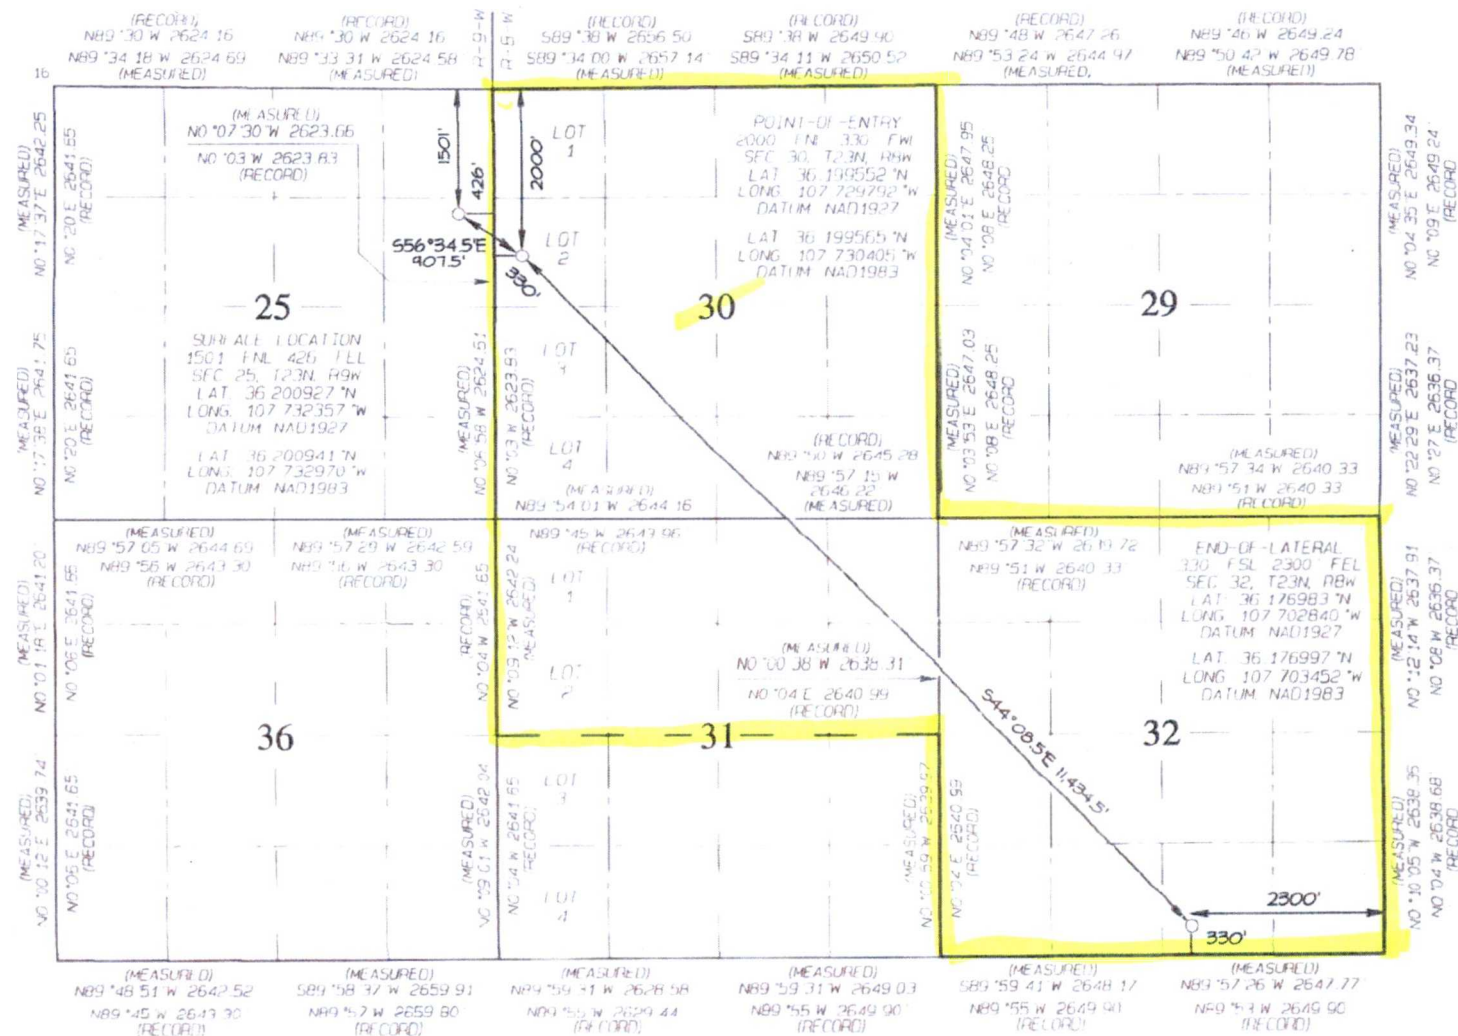



ENDURING RESOURCES IV, LLC
1050 SEVENTEENTH STREET, SUITE 2500
DENVER, COLORADO 80265

DRILLING PLAN: *Drill, complete, and equip single lateral in the Mancos Silt formation*

WELL INFORMATION:

Name: Rodeo Unit 509H

API Number: 30-045-

State: New Mexico

County: San Juan

Surface Elevation: 6,883 ft ASL (GL) 6,905 ft ASL (KB)

Surface Location: 25-23N-09W Sec-Twn-Rng 1,501 ft FNL 426 ft FEL

36.200941 ° N latitude 107.73297 ° W longitude (NAD 83)

BH Location: 32-23N-08W Sec-Twn-Rng 330 ft FSL 2,300 ft FEL

36.176997 ° N latitude 107.703452 ° W longitude (NAD 83)

Driving Directions: From the intersection of US HWY 550 and US HWY 64 in Bloomfield, NM: South on US HWY 550 for 37.8 miles to MM 113.4, right (southwest) at on CR #7890 for 0.8 miles to fork; left (south) staying on #7890 for 1.3 miles to 4-way intersection, left (southeast) staying on #7890 for 0.6 miles to fork, right (southwest) staying on #7890 for 0.5 miles, left on access road for 0.4 miles to Rodeo Unit 508H pad.

GEOLOGIC AND RESERVOIR INFORMATION:

Prognosis:	Formation Tops	TVD (ft ASL)	TVD (ft KB)	MD (ft KB)	O / G / W	Pressure
	Ojo Alamo	6,350	555	555	W	normal
	Kirtland	6,200	705	705	W	normal
	Fruitland	6,055	850	851	G, W	sub
	Pictured Cliffs	5,695	1,210	1,212	G, W	sub
	Lewis	5,475	1,430	1,433	G, W	normal
	Chacra	5,350	1,555	1,559	G, W	normal
	Cliff House	4,265	2,640	2,649	G, W	sub
	Menefee	4,255	2,650	2,659	G, W	normal
	Point Lookout	3,275	3,630	3,643	G, W	normal
	Mancos	3,025	3,880	3,894	O,G	normal
	Gallup (MNCS. A)	2,795	4,110	4,139	O,G	normal
	Gallup (Target Depth)	2,475	4,430	4,817	O,G	normal
	PROJECTED WELL TD	2,580	4,325	16,255	O,G	normal

Surface: Nacimiento

Oil & Gas Zones: Several gas bearing zones will be encountered; target formation is the Gallup

Pressure: Normal pressure gradient (0.43 psi/ft) anticipated in all formations

Max. pressure gradient: 0.43 psi/ft Evacuated hole gradient: 0.22 psi/ft

Maximum anticipated BH pressure, assuming maximum pressure gradient: 1,910 psi

Maximum anticipated surface pressure, assuming partially evacuated hole: 940 psi

Temperature: Maximum anticipated BHT is 165° F or less

H₂S INFORMATION:

H₂S Zones: Encountering hydrogen-sulfide bearing zones is **NOT** anticipated.

Safety: Sensors and alarms will be placed in the substructure, on the rig floor, above the pits, and at the shakers.

LOGGING, CORING, AND TESTING:

Mud Logs: None planned; remote geo-steering from drill out of 9-5/8" casing to TD; gas chromatograph from drillout of 13-3/8" casing to TD.

MWD / LWD: Gamma Ray from drillout of 13-3/8" casing to TD

Open Hole Logs: None planned

Testing: None planned

Coring: None planned

Cased Hole Logs: CBL on 5-1/2" casing from deepest free-fall depth to surface

DRILLING RIG INFORMATION:

Contractor: Aztec

Rig No.: 1000

Draw Works: E80 AC 1,500 hp

Mast: Hyduke Triple (136 ft, 600,000 lbs, 10 lines)

Top Drive: NOV IDS-350PE (350 ton)

Prime Movers: 4 - GE Jenbacher Natural Gas Generator

Pumps: 2 - RS F-1600 (7,500 psi)

BOPE 1: Cameron double gate ram (11", 5,000 psi)

BOPE 2: Cameron annular (11", 5,000 psi)

Choke: Cameron (4", 10,000 psi)

KB-GL (ft): 22

BOPE REQUIREMENTS:

See attached diagram for details regarding BOPE specifications and configuration.

- 1) Rig will be equipped with upper and lower kelly cocks with handles available.
- 2) Inside BOP and TIW valves will be available to use on all sizes and threads of drill pipe used while drilling the well.
- 2) BOP accumulator will have enough capacity to open the HCR valve, close all rams and annular preventer, and retain minimum of 200 psi above precharge on the closing manifold without the use of closing pumps. The fluid reservoir capacity shall be at least double the usable fluid volume of the accumulator system capacity, and the fluid level shall be maintained at manufacturer's recommendation. There will be two additional sources of power for the closing pumps (electric and air). Sufficient nitrogen bottles will be available and will be recharged when pressure falls below manufacturer's recommended minimum.
- 3) BOP testing shall be conducted (a) when initially installed, (b) whenever any seal is broken or repaired, (c) if the time since the previous test exceeds 30 days. Tests will be conducted using a test plug. BOP ram preventers will be tested to 5,000 psi for 10 minutes, and the annular preventer will be tested to 2,500 psi for 10 minutes. Ram and annular preventers will be tested to 250 psi for 5 minutes. Additionally, BOP and casing strings will be tested to .22 psi/ft or 1,500 psi, whichever is greater but not exceeding 70% of yield strength of the casing, for 30 minutes, prior to drilling out 13-3/8" and 9-5/8" casing. Rams and hydraulically operated remote choke line valve will be function tested daily at a minimum.
- 4) Remote valve for BOP rams, HCR, and choke shall be placed in a location that is readily available to the driller. The remote BOP valve shall be capable of closing and opening the rams.
- 5) Manual locking devices (hand wheels) shall be installed on rams. A valve will be installed on the annular preventer's closing line as close as possible to the preventer to act as a locking device. The valve will be maintained in the open position and shall only be closed when there is no power to the accumulator.

FLUIDS AND SOLIDS CONTROL PROGRAM:

Fluid Measurement: Pumps shall be equipped with stroke counters with displays in the dog-house. Slow pump speed shall be recorded daily and after mudding up, at a minimum, on the drilling report. A Pit Volume Totalizer will be installed and the readout will be displayed in the dog-house. Gas-detecting equipment will be installed at the shakers, and readouts will be available in the dog-house and the in the geologist's work-station (if geologist or mud-logger is on-site).

Closed-Loop System: A fully, closed-loop system will be utilized. The system will consist of above-ground piping and above-ground storage tanks and bins. The system will not entail any earthen pits, below-grade storage, or drying pads. All equipment will be disassembled and removed from the site when drilling operations cease. The system will be capable of storing all fluids and generated cuttings and of preventing uncontrolled releases of the same. The system will be operated in an efficient manner to allow the recycling and reuse of as much fluid as possible and to minimize the amount of fluids and solids that require disposal.

Fluid Disposal: Fluids that cannot be reused, recycled, or returned to the supplier will be hauled to and disposed of at an approved disposal site (Industrial Ecosystem, Inc. or Envirotech, Inc.).

Solids Disposal: Drilling solids will be stored (until haul-off) on-site in separate containers with no other waste, debris, or garbage products. Waste solids will be hauled to and disposed of at an approved disposal site (Industrial Ecosystem, Inc. or Envirotech, Inc.).

Fluid Program: See "Detailed Drilling Plan" section for specifics.

DETAILED DRILLING PLAN:

SURFACE: Drill vertically to casing setting depth (plus necessary rathole), run casing, cement casing to surface.

0 ft (MD)	to	240 ft (MD)	Hole Section Length:	240 ft
0 ft (TVD)	to	240 ft (TVD)	Casing Required:	220 ft

Note: Surface hole may be drilled, cased, and cemented with a smaller rig in advance of the drilling rig.

Fluid:	Type	MW (ppg)	FL (mL/30 min)	PV (cp)	YP (lb/100 sqft)	pH	Comments
	Fresh Water	8.4	N/C	2 - 8	2 - 12	9.0	Spud mud

Hole Size: 17-1/2"

Bit / Motor: Mill Tooth or PDC, no motor

MWD / Survey: No MWD, run gyro survey after drilling

Logging: None

Casing Specs:		Wt (lb/ft)	Grade	Conn.	Collapse (psi)	Burst (psi)	Tens. Body (lbs)	Tens. Conn (lbs)
Specs	13.375	54.5	J-55	BTC	1,130	2,730	853,000	514,000
Loading					105	581	111,406	111,406
Min. S.F.					10.78	4.70	7.66	4.61

Assumptions: Collapse: fully evacuated casing with 8.4 ppg equivalent external pressure gradient

Burst: maximum anticipated surface pressure with 9.5 ppg fluid inside casing while drilling intermediate hole and 8.4 ppg equivalent external pressure gradient

Tension: buoyed weight in 8.4 ppg fluid with 100,000 lbs over-pull

MU Torque (ft lbs): Minimum: N/A Optimum: N/A Maximum: N/A

Make-up as per API Buttress Connection running procedure.

Casing Details: Float shoe, 1 jt casing, float collar, casing to surface

Centralizers: 2 centralizers per jt stop-banded 10' from each collar on bottom 3 jts, 1 centralizer per 2 jts to surface

Cement:	Type	Weight (ppg)	Yield (cuft/sk)	Water (gal/sk)	Hole Cap. (cuft/ft)	% Excess	Planned TOC (ft MD)	Total Cmt (sx)
	Class G	15.8	1.174	5.15	0.6946	100%	0	284

Calculated cement volumes assume gauge hole and the excess noted in table

Halliburton HALCEM surface cementing blend

Notify NMOCD & BLM if cement is not circulated to surface. Cement must achieve 500 psi compressive strength before drilling out.

INTERMEDIATE: Drill as per directional plan to casing setting depth, run casing, cement casing to surface, install wellhead.

240 ft (MD)	to	2,709 ft (MD)	Hole Section Length:	2,469 ft
240 ft (TVD)	to	2,700 ft (TVD)	Casing Required:	2,709 ft

Fluid:	Type	MW (ppg)	FL (mL/30 min)	PV (cp)	YP (lb/100 sqft)	pH	Comments
	WBM	8.8 - 9.5	20	8 - 14	8 - 14	9.0 - 9.5	OBM as contingency

Hole Size: 12-1/4"

Bit / Motor: PDC w/mud motor

MWD / Survey: MWD with GR, inclination, and azimuth survey (every 100' at a minimum)

Logging: None

Pressure Test: NU BOPE and test (as noted above); pressure test 13-3/8" casing to 1,500 psi for 30 minutes.

Note: The intermediate hole section may be drilled with annular preventer and blind rams only (no pipe rams).

Maximum anticipated surface pressure while drilling intermediate hole section is 570 psi

Casing Specs:		Wt (lb/ft)	Grade	Conn.	Collapse (psi)	Burst (psi)	Tens. Body (lbs)	Tens. Conn (lbs)
Specs	9.625	36.0	J-55	LTC	2,020	3,520	564,000	453,000
Loading					1,179	1,094	185,046	185,046
Min. S.F.					1.71	3.22	3.05	2.45

Assumptions: Collapse: fully evacuated casing with 8.4 ppg equivalent external pressure gradient

Burst: maximum anticipated surface pressure with 9.5 ppg fluid inside casing while drilling production hole and 8.4 ppg equivalent external pressure gradient

Tension: buoyed weight in 8.4 ppg fluid with 100,000 lbs over-pull

MU Torque (ft lbs): Minimum: 3,400 Optimum: 4,530 Maximum: 5,660

Casing Details: Float shoe, 1 jt casing, float collar, landing collar, casing to surface

Centralizers: 2 centralizers per jt stop-banded 10' from each collar on bottom 3 jts, 1 centralizer per 2 jts to surface

Cement:	Type	Weight (ppg)	Yield (cuft/sk)	Water (gal/sk)	Hole Cap. (cuft/ft)	% Excess	Planned TOC (ft MD)	Total Cmt (sx)
Lead	G:POZ Blend	12.3	1.987	10.16	0.3132	40%	0	487
Tail	Class G	15.8	1.148	4.98	0.3132	10%	2,209	150

Calculated cement volumes assume gauge hole and the excess noted in table

Halliburton ECONOCEM & HALCEM cementing blend

Notify NMOCD & BLM if cement is not circulated to surface. Cement must achieve 500 psi compressive strength before drilling out.

PRODUCTION: Drill to TD following directional plan, run casing, cement casing to surface.

2,709 ft (MD)	to	16,255 ft (MD)	Hole Section Length:	13,546 ft
2,700 ft (TVD)	to	4,325 ft (TVD)	Casing Required:	16,255 ft

Estimated KOP:	3,864 ft (MD)	3,850 ft (TVD)
Estimated Landing Point (P.O.E.):	4,817 ft (MD)	4,430 ft (TVD)
Estimated Lateral Length:	11,438 ft (MD)	

Fluid:	Type	MW (ppg)	FL (mL/30')	PV (cp)	YP (lb/100 sqft)	pH	Comments
	WBM	8.8 - 9.5	20	8 - 14	8 - 14	9.0 - 9.5	OBM as contingency

Hole Size: 8-1/2"

Bit / Motor: PDC w/mud motor

MWD / Survey: MWD with GR, inclination, and azimuth (survey every joint from KOP to Landing Point and survey every 100' minimum before KOP and after Landing Point)

Logging: GR MWD for entire section, no mud-log or cuttings sampling, no OH WL logs

Pressure Test: NU BOPE and test (as noted above); pressure test 9-5/8" casing to 1,500 psi for 30 minutes.

Casing Specs:	Size (in)	Wt (lb/ft)	Grade	Conn.	Collapse (psi)	Burst (psi)	Tens. Body (lbs)	Tens. Conn (lbs)
---------------	-----------	------------	-------	-------	----------------	-------------	------------------	------------------

Specs	5.500	17.0	P-110	LTC	7,460	10,640	546,000	445,000
Loading					2,137	8,905	338,452	338,452
Min. S.F.					3.49	1.19	1.61	1.31

Assumptions: Collapse: fully evacuated casing with 9.5 ppg fluid in the annulus (floating casing during running)
 Burst: 8,500 psi maximum surface treating pressure with 10.2 ppg equivalent mud weight sand laden fluid with 8.4 ppg equivalent external pressure gradient
 Tension: buoyed weight in 9.0 ppg fluid with 100,000 lbs over-pull

MU Torque (ft lbs): Minimum: 3,470 Optimum: 4,620 Maximum: 5,780

Casing Details: Float shoe, 2 jts casing, float collar, landing collar, toe-initiation sleeve with handling pups, 1 jt casing, toe-initiation sleeve with handling pups, casing to KOP with 20' marker joints spaced evenly in lateral every 2,000'. Place Floatation Sub at KOP (+/-). Continue running casing to surface. **The toe-initiation sleeves must be positioned INSIDE the 330' unit setback.**

Centralizers: Lateral: Minimum of 1 centralizer per 2 joints

Curve: 1 centralizer every joint from landing point to KOP

Vertical: 1 centralizer every 2 joints from KOP to 9-5/8" shoe, 1 every 3 joints from 9-5/8" shoe to surface

Cement:	Type	Weight (ppg)	Yield (cuft/sk)	Water (gal/sk)	Hole Cap. (cuft/ft)	% Excess	Planned TOC (ft MD)	Total Cmt (sx)
Lead	G:POZ blend	12.3	1.987	10.16	0.2691	40%	0	698
Tail	G:POZ blend	13.3	1.354	5.94	0.2291	10%	3,850	2,309

Calculated cement volumes assume gauge hole and the excess noted in table

Halliburton ECONOCEM & EXTENDACEM cementing blend

Notify NMOCD & BLM if cement is not circulated to surface.

Note: The lateral may be drilled past applicable setback to maximize the length of the completed interval and to maximize resource recovery. If the well is drilled past the setback, the toe Initiation sleeve and all perforations will be placed inside the setback. An unorthodox location application is not required because the completed interval will be entirely within the setback as defined and allowed by NMAC 19.15.16.7B(1), NMAC 19.15.16.14B(2), NMAC 19.15.16.15B(2). Order number for Kimbeto Wash Unit is R-14084.

FINISH WELL: ND BOP, NU WH with BPV and cap, RDMO.

COMPLETION AND PRODUCTION PLAN:

Frac: Lateral will be fracture-stimulated in approximately 58 plug-and-perf stages with approximately 300,000 bbls slickwater fluid and 21,000,000 lbs of proppant.

Flowback: Depending on well pressures, flow back may be either up 5-1/2" casing or 2-7/8" production tubing. Well will be flowed back until proppant volumes are low enough that the well can safely be produced through permanent production facilities.

Production: Well will produce up production tubing via gas-lift into permanent production and storage facilities.

ESTIMATED START DATES:

Drilling: 10/1/2018
 Completion: 12/1/2018
 Production: 1/14/2019

Prepared by: Alec Bridge 7/12/2018



Enduring Resources LLC

San Juan Basin - Rodeo Unit

508H Pad

509H

Wellbore #1

Plan: Design #1

Standard Planning Report

13 July, 2018

Project	San Juan Basin - Rodeo Unit		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Central Zone		

Site	508H Pad, San Juan Co., New Mexico		
Site Position:		Northing:	1,895,763.60 usft
From:	Lat/Long	Easting:	1,202,863.76 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	36.200969°N
		Longitude:	107.733028°W
		Grid Convergence:	-0.88 °

Well	509H		
Well Position	+N/-S	-10.5 usft	Northing: 1,895,753.15 usft
	+E/-W	17.0 usft	Easting: 1,202,880.71 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	Latitude: 36.200941°N
			Longitude: 107.732970°W
			Ground Level: 6,883.0 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	9.98	63.05	50,599.27418138

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	135.89

Plan Survey Tool Program	Date	7/13/2018		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	16,254.5	Design #1 (Wellbore #1)	MWD
				OWSG MWD - Standard

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
220.0	0.00	0.00	220.0	0.0	0.0	0.00	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.00	0.00	0.00	0.00	
770.2	5.40	99.46	769.8	-2.1	12.6	2.00	2.00	0.00	99.46	
3,864.2	5.40	99.46	3,850.0	-50.0	300.0	0.00	0.00	0.00	0.00	509H-KOP
4,044.1	21.75	135.17	4,024.5	-75.2	332.1	9.80	9.08	19.85	45.56	
4,817.4	90.53	136.79	4,430.0	-512.5	749.2	8.89	8.89	0.21	1.75	509H-POE
16,254.5	90.53	136.79	4,325.0	-8,848.6	8,579.0	0.00	0.00	0.00	0.00	509H-BHL

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
220.0	0.00	0.00	220.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	2.00	99.46	600.0	-0.3	1.7	1.4	2.00	2.00	0.00
700.0	4.00	99.46	699.8	-1.1	6.9	5.6	2.00	2.00	0.00
770.2	5.40	99.46	769.8	-2.1	12.6	10.2	2.00	2.00	0.00
800.0	5.40	99.46	799.5	-2.6	15.3	12.5	0.00	0.00	0.00
900.0	5.40	99.46	899.0	-4.1	24.6	20.1	0.00	0.00	0.00
1,000.0	5.40	99.46	998.6	-5.7	33.9	27.7	0.00	0.00	0.00
1,100.0	5.40	99.46	1,098.1	-7.2	43.2	35.2	0.00	0.00	0.00
1,200.0	5.40	99.46	1,197.7	-8.7	52.5	42.8	0.00	0.00	0.00
1,300.0	5.40	99.46	1,297.2	-10.3	61.8	50.4	0.00	0.00	0.00
1,400.0	5.40	99.46	1,396.8	-11.8	71.1	58.0	0.00	0.00	0.00
1,500.0	5.40	99.46	1,496.4	-13.4	80.4	65.6	0.00	0.00	0.00
1,600.0	5.40	99.46	1,595.9	-14.9	89.7	73.1	0.00	0.00	0.00
1,700.0	5.40	99.46	1,695.5	-16.5	98.9	80.7	0.00	0.00	0.00
1,800.0	5.40	99.46	1,795.0	-18.0	108.2	88.3	0.00	0.00	0.00
1,900.0	5.40	99.46	1,894.6	-19.6	117.5	95.9	0.00	0.00	0.00
2,000.0	5.40	99.46	1,994.1	-21.1	126.8	103.4	0.00	0.00	0.00
2,100.0	5.40	99.46	2,093.7	-22.7	136.1	111.0	0.00	0.00	0.00
2,200.0	5.40	99.46	2,193.2	-24.2	145.4	118.6	0.00	0.00	0.00
2,300.0	5.40	99.46	2,292.8	-25.8	154.7	126.2	0.00	0.00	0.00
2,400.0	5.40	99.46	2,392.4	-27.3	164.0	133.8	0.00	0.00	0.00
2,500.0	5.40	99.46	2,491.9	-28.9	173.3	141.3	0.00	0.00	0.00
2,600.0	5.40	99.46	2,591.5	-30.4	182.6	148.9	0.00	0.00	0.00
2,700.0	5.40	99.46	2,691.0	-32.0	191.8	156.5	0.00	0.00	0.00
2,800.0	5.40	99.46	2,790.6	-33.5	201.1	164.1	0.00	0.00	0.00
2,900.0	5.40	99.46	2,890.1	-35.1	210.4	171.7	0.00	0.00	0.00
3,000.0	5.40	99.46	2,989.7	-36.6	219.7	179.2	0.00	0.00	0.00
3,100.0	5.40	99.46	3,089.2	-38.2	229.0	186.8	0.00	0.00	0.00
3,200.0	5.40	99.46	3,188.8	-39.7	238.3	194.4	0.00	0.00	0.00
3,300.0	5.40	99.46	3,288.4	-41.3	247.6	202.0	0.00	0.00	0.00
3,400.0	5.40	99.46	3,387.9	-42.8	256.9	209.5	0.00	0.00	0.00
3,500.0	5.40	99.46	3,487.5	-44.4	266.2	217.1	0.00	0.00	0.00
3,600.0	5.40	99.46	3,587.0	-45.9	275.5	224.7	0.00	0.00	0.00
3,700.0	5.40	99.46	3,686.6	-47.5	284.7	232.3	0.00	0.00	0.00
3,800.0	5.40	99.46	3,786.1	-49.0	294.0	239.9	0.00	0.00	0.00
3,864.2	5.40	99.46	3,850.0	-50.0	300.0	244.7	0.00	0.00	0.00
3,900.0	8.25	117.21	3,885.6	-51.5	304.0	248.5	9.80	7.95	49.50
4,000.0	17.52	132.57	3,983.0	-64.9	321.5	270.4	9.80	9.27	15.36
4,044.1	21.75	135.17	4,024.5	-75.2	332.1	285.2	9.80	9.60	5.90
4,100.0	26.72	135.50	4,075.5	-91.6	348.2	308.1	8.89	8.89	0.60
4,200.0	35.62	135.89	4,161.0	-128.6	384.3	359.8	8.89	8.89	0.38
4,300.0	44.51	136.13	4,237.4	-174.8	429.0	424.1	8.89	8.89	0.24
4,400.0	53.40	136.31	4,303.0	-229.2	481.1	499.5	8.89	8.89	0.18
4,500.0	62.30	136.45	4,356.2	-290.5	539.5	584.1	8.89	8.89	0.14
4,600.0	71.19	136.57	4,395.6	-357.1	602.6	675.8	8.89	8.89	0.12
4,700.0	80.08	136.67	4,420.4	-427.4	669.1	772.6	8.89	8.89	0.11
4,800.0	88.98	136.78	4,429.9	-499.8	737.3	872.0	8.89	8.89	0.10
4,817.4	90.53	136.79	4,430.0	-512.5	749.2	889.4	8.89	8.89	0.10
4,900.0	90.53	136.79	4,429.2	-572.7	805.7	972.0	0.00	0.00	0.00
5,000.0	90.53	136.79	4,428.3	-645.6	874.2	1,072.0	0.00	0.00	0.00
5,100.0	90.53	136.79	4,427.4	-718.5	942.6	1,172.0	0.00	0.00	0.00
5,200.0	90.53	136.79	4,426.5	-791.4	1,011.1	1,272.0	0.00	0.00	0.00
5,300.0	90.53	136.79	4,425.6	-864.2	1,079.6	1,372.0	0.00	0.00	0.00
5,400.0	90.53	136.79	4,424.7	-937.1	1,148.0	1,471.9	0.00	0.00	0.00
5,500.0	90.53	136.79	4,423.7	-1,010.0	1,216.5	1,571.9	0.00	0.00	0.00
5,600.0	90.53	136.79	4,422.8	-1,082.9	1,284.9	1,671.9	0.00	0.00	0.00
5,700.0	90.53	136.79	4,421.9	-1,155.8	1,353.4	1,771.9	0.00	0.00	0.00
5,800.0	90.53	136.79	4,421.0	-1,228.7	1,421.9	1,871.9	0.00	0.00	0.00
5,900.0	90.53	136.79	4,420.1	-1,301.6	1,490.3	1,971.9	0.00	0.00	0.00
6,000.0	90.53	136.79	4,419.1	-1,374.4	1,558.8	2,071.8	0.00	0.00	0.00

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
6,100.0	90.53	136.79	4,418.2	-1,447.3	1,627.2	2,171.8	0.00	0.00	0.00
6,200.0	90.53	136.79	4,417.3	-1,520.2	1,695.7	2,271.8	0.00	0.00	0.00
6,300.0	90.53	136.79	4,416.4	-1,593.1	1,764.2	2,371.8	0.00	0.00	0.00
6,400.0	90.53	136.79	4,415.5	-1,666.0	1,832.6	2,471.8	0.00	0.00	0.00
6,500.0	90.53	136.79	4,414.6	-1,738.9	1,901.1	2,571.8	0.00	0.00	0.00
6,600.0	90.53	136.79	4,413.6	-1,811.8	1,969.5	2,671.7	0.00	0.00	0.00
6,700.0	90.53	136.79	4,412.7	-1,884.7	2,038.0	2,771.7	0.00	0.00	0.00
6,800.0	90.53	136.79	4,411.8	-1,957.5	2,106.5	2,871.7	0.00	0.00	0.00
6,900.0	90.53	136.79	4,410.9	-2,030.4	2,174.9	2,971.7	0.00	0.00	0.00
7,000.0	90.53	136.79	4,410.0	-2,103.3	2,243.4	3,071.7	0.00	0.00	0.00
7,100.0	90.53	136.79	4,409.0	-2,176.2	2,311.8	3,171.7	0.00	0.00	0.00
7,200.0	90.53	136.79	4,408.1	-2,249.1	2,380.3	3,271.6	0.00	0.00	0.00
7,300.0	90.53	136.79	4,407.2	-2,322.0	2,448.8	3,371.6	0.00	0.00	0.00
7,400.0	90.53	136.79	4,406.3	-2,394.9	2,517.2	3,471.6	0.00	0.00	0.00
7,500.0	90.53	136.79	4,405.4	-2,467.7	2,585.7	3,571.6	0.00	0.00	0.00
7,600.0	90.53	136.79	4,404.5	-2,540.6	2,654.1	3,671.6	0.00	0.00	0.00
7,700.0	90.53	136.79	4,403.5	-2,613.5	2,722.6	3,771.6	0.00	0.00	0.00
7,800.0	90.53	136.79	4,402.6	-2,686.4	2,791.1	3,871.5	0.00	0.00	0.00
7,900.0	90.53	136.79	4,401.7	-2,759.3	2,859.5	3,971.5	0.00	0.00	0.00
8,000.0	90.53	136.79	4,400.8	-2,832.2	2,928.0	4,071.5	0.00	0.00	0.00
8,100.0	90.53	136.79	4,399.9	-2,905.1	2,996.4	4,171.5	0.00	0.00	0.00
8,200.0	90.53	136.79	4,398.9	-2,978.0	3,064.9	4,271.5	0.00	0.00	0.00
8,300.0	90.53	136.79	4,398.0	-3,050.8	3,133.3	4,371.5	0.00	0.00	0.00
8,400.0	90.53	136.79	4,397.1	-3,123.7	3,201.8	4,471.4	0.00	0.00	0.00
8,500.0	90.53	136.79	4,396.2	-3,196.6	3,270.3	4,571.4	0.00	0.00	0.00
8,600.0	90.53	136.79	4,395.3	-3,269.5	3,338.7	4,671.4	0.00	0.00	0.00
8,700.0	90.53	136.79	4,394.4	-3,342.4	3,407.2	4,771.4	0.00	0.00	0.00
8,800.0	90.53	136.79	4,393.4	-3,415.3	3,475.6	4,871.4	0.00	0.00	0.00
8,900.0	90.53	136.79	4,392.5	-3,488.2	3,544.1	4,971.4	0.00	0.00	0.00
9,000.0	90.53	136.79	4,391.6	-3,561.0	3,612.6	5,071.3	0.00	0.00	0.00
9,100.0	90.53	136.79	4,390.7	-3,633.9	3,681.0	5,171.3	0.00	0.00	0.00
9,200.0	90.53	136.79	4,389.8	-3,706.8	3,749.5	5,271.3	0.00	0.00	0.00
9,300.0	90.53	136.79	4,388.8	-3,779.7	3,817.9	5,371.3	0.00	0.00	0.00
9,400.0	90.53	136.79	4,387.9	-3,852.6	3,886.4	5,471.3	0.00	0.00	0.00
9,500.0	90.53	136.79	4,387.0	-3,925.5	3,954.9	5,571.3	0.00	0.00	0.00
9,600.0	90.53	136.79	4,386.1	-3,998.4	4,023.3	5,671.2	0.00	0.00	0.00
9,700.0	90.53	136.79	4,385.2	-4,071.3	4,091.8	5,771.2	0.00	0.00	0.00
9,800.0	90.53	136.79	4,384.3	-4,144.1	4,160.2	5,871.2	0.00	0.00	0.00
9,900.0	90.53	136.79	4,383.3	-4,217.0	4,228.7	5,971.2	0.00	0.00	0.00
10,000.0	90.53	136.79	4,382.4	-4,289.9	4,297.2	6,071.2	0.00	0.00	0.00
10,100.0	90.53	136.79	4,381.5	-4,362.8	4,365.6	6,171.2	0.00	0.00	0.00
10,200.0	90.53	136.79	4,380.6	-4,435.7	4,434.1	6,271.1	0.00	0.00	0.00
10,300.0	90.53	136.79	4,379.7	-4,508.6	4,502.5	6,371.1	0.00	0.00	0.00
10,400.0	90.53	136.79	4,378.7	-4,581.5	4,571.0	6,471.1	0.00	0.00	0.00
10,500.0	90.53	136.79	4,377.8	-4,654.3	4,639.5	6,571.1	0.00	0.00	0.00
10,600.0	90.53	136.79	4,376.9	-4,727.2	4,707.9	6,671.1	0.00	0.00	0.00
10,700.0	90.53	136.79	4,376.0	-4,800.1	4,776.4	6,771.1	0.00	0.00	0.00
10,800.0	90.53	136.79	4,375.1	-4,873.0	4,844.8	6,871.0	0.00	0.00	0.00
10,900.0	90.53	136.79	4,374.2	-4,945.9	4,913.3	6,971.0	0.00	0.00	0.00
11,000.0	90.53	136.79	4,373.2	-5,018.8	4,981.8	7,071.0	0.00	0.00	0.00
11,100.0	90.53	136.79	4,372.3	-5,091.7	5,050.2	7,171.0	0.00	0.00	0.00
11,200.0	90.53	136.79	4,371.4	-5,164.5	5,118.7	7,271.0	0.00	0.00	0.00
11,300.0	90.53	136.79	4,370.5	-5,237.4	5,187.1	7,371.0	0.00	0.00	0.00
11,400.0	90.53	136.79	4,369.6	-5,310.3	5,255.6	7,470.9	0.00	0.00	0.00
11,500.0	90.53	136.79	4,368.6	-5,383.2	5,324.1	7,570.9	0.00	0.00	0.00
11,600.0	90.53	136.79	4,367.7	-5,456.1	5,392.5	7,670.9	0.00	0.00	0.00
11,700.0	90.53	136.79	4,366.8	-5,529.0	5,461.0	7,770.9	0.00	0.00	0.00
11,800.0	90.53	136.79	4,365.9	-5,601.9	5,529.4	7,870.9	0.00	0.00	0.00
11,900.0	90.53	136.79	4,365.0	-5,674.8	5,597.9	7,970.9	0.00	0.00	0.00
12,000.0	90.53	136.79	4,364.1	-5,747.6	5,666.3	8,070.8	0.00	0.00	0.00
12,100.0	90.53	136.79	4,363.1	-5,820.5	5,734.8	8,170.8	0.00	0.00	0.00
12,200.0	90.53	136.79	4,362.2	-5,893.4	5,803.3	8,270.8	0.00	0.00	0.00
12,300.0	90.53	136.79	4,361.3	-5,966.3	5,871.7	8,370.8	0.00	0.00	0.00
12,400.0	90.53	136.79	4,360.4	-6,039.2	5,940.2	8,470.8	0.00	0.00	0.00
12,500.0	90.53	136.79	4,359.5	-6,112.1	6,008.6	8,570.8	0.00	0.00	0.00
12,600.0	90.53	136.79	4,358.6	-6,185.0	6,077.1	8,670.7	0.00	0.00	0.00

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
12,700.0	90.53	136.79	4,357.6	-6,257.8	6,145.6	8,770.7	0.00	0.00	0.00	
12,800.0	90.53	136.79	4,356.7	-6,330.7	6,214.0	8,870.7	0.00	0.00	0.00	
12,900.0	90.53	136.79	4,355.8	-6,403.6	6,282.5	8,970.7	0.00	0.00	0.00	
13,000.0	90.53	136.79	4,354.9	-6,476.5	6,350.9	9,070.7	0.00	0.00	0.00	
13,100.0	90.53	136.79	4,354.0	-6,549.4	6,419.4	9,170.7	0.00	0.00	0.00	
13,200.0	90.53	136.79	4,353.0	-6,622.3	6,487.9	9,270.6	0.00	0.00	0.00	
13,300.0	90.53	136.79	4,352.1	-6,695.2	6,556.3	9,370.6	0.00	0.00	0.00	
13,400.0	90.53	136.79	4,351.2	-6,768.1	6,624.8	9,470.6	0.00	0.00	0.00	
13,500.0	90.53	136.79	4,350.3	-6,840.9	6,693.2	9,570.6	0.00	0.00	0.00	
13,600.0	90.53	136.79	4,349.4	-6,913.8	6,761.7	9,670.6	0.00	0.00	0.00	
13,700.0	90.53	136.79	4,348.5	-6,986.7	6,830.2	9,770.5	0.00	0.00	0.00	
13,800.0	90.53	136.79	4,347.5	-7,059.6	6,898.6	9,870.5	0.00	0.00	0.00	
13,900.0	90.53	136.79	4,346.6	-7,132.5	6,967.1	9,970.5	0.00	0.00	0.00	
14,000.0	90.53	136.79	4,345.7	-7,205.4	7,035.5	10,070.5	0.00	0.00	0.00	
14,100.0	90.53	136.79	4,344.8	-7,278.3	7,104.0	10,170.5	0.00	0.00	0.00	
14,200.0	90.53	136.79	4,343.9	-7,351.1	7,172.5	10,270.5	0.00	0.00	0.00	
14,300.0	90.53	136.79	4,342.9	-7,424.0	7,240.9	10,370.4	0.00	0.00	0.00	
14,400.0	90.53	136.79	4,342.0	-7,496.9	7,309.4	10,470.4	0.00	0.00	0.00	
14,500.0	90.53	136.79	4,341.1	-7,569.8	7,377.8	10,570.4	0.00	0.00	0.00	
14,600.0	90.53	136.79	4,340.2	-7,642.7	7,446.3	10,670.4	0.00	0.00	0.00	
14,700.0	90.53	136.79	4,339.3	-7,715.6	7,514.8	10,770.4	0.00	0.00	0.00	
14,800.0	90.53	136.79	4,338.4	-7,788.5	7,583.2	10,870.4	0.00	0.00	0.00	
14,900.0	90.53	136.79	4,337.4	-7,861.4	7,651.7	10,970.3	0.00	0.00	0.00	
15,000.0	90.53	136.79	4,336.5	-7,934.2	7,720.1	11,070.3	0.00	0.00	0.00	
15,100.0	90.53	136.79	4,335.6	-8,007.1	7,788.6	11,170.3	0.00	0.00	0.00	
15,200.0	90.53	136.79	4,334.7	-8,080.0	7,857.1	11,270.3	0.00	0.00	0.00	
15,300.0	90.53	136.79	4,333.8	-8,152.9	7,925.5	11,370.3	0.00	0.00	0.00	
15,400.0	90.53	136.79	4,332.8	-8,225.8	7,994.0	11,470.3	0.00	0.00	0.00	
15,500.0	90.53	136.79	4,331.9	-8,298.7	8,062.4	11,570.2	0.00	0.00	0.00	
15,600.0	90.53	136.79	4,331.0	-8,371.6	8,130.9	11,670.2	0.00	0.00	0.00	
15,700.0	90.53	136.79	4,330.1	-8,444.4	8,199.4	11,770.2	0.00	0.00	0.00	
15,800.0	90.53	136.79	4,329.2	-8,517.3	8,267.8	11,870.2	0.00	0.00	0.00	
15,900.0	90.53	136.79	4,328.3	-8,590.2	8,336.3	11,970.2	0.00	0.00	0.00	
16,000.0	90.53	136.79	4,327.3	-8,663.1	8,404.7	12,070.2	0.00	0.00	0.00	
16,100.0	90.53	136.79	4,326.4	-8,736.0	8,473.2	12,170.1	0.00	0.00	0.00	
16,200.0	90.53	136.79	4,325.5	-8,808.9	8,541.6	12,270.1	0.00	0.00	0.00	
16,254.5	90.53	136.79	4,325.0	-8,848.6	8,579.0	12,324.7	0.00	0.00	0.00	

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
509H-KOP	0.00	360.00	3,850.0	-50.0	300.0	1,895,703.15	1,203,180.71	36.200816°N	107.731951°W
- plan hits target center									
- Point									
509H-BHL	0.00	360.00	4,325.0	-8,848.6	8,579.0	1,886,904.51	1,211,459.70	36.176997°N	107.703452°W
- plan hits target center									
- Point									
509H-POE	0.00	0.00	4,430.0	-512.5	749.2	1,895,240.65	1,203,629.90	36.199565°N	107.730405°W
- plan hits target center									
- Point									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name		Casing Diameter (")	Hole Diameter (")
220.0	220.0	13 3/8"		13-3/8	17-1/2
2,709.0	2,700.0	9 5/8"		9-5/8	12-1/4

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
555.0	555.0	Ojo Alamo		0.00	
705.2	705.0	Kirtland		0.00	
850.8	850.0	Fruitland		0.00	
1,212.4	1,210.0	Pictured Cliffs		0.00	
1,433.3	1,430.0	Lewis		0.00	
1,558.9	1,555.0	Chacra		0.00	
2,648.8	2,640.0	Cliff House		0.00	
2,658.8	2,650.0	Menefee		0.00	
3,643.2	3,630.0	Point Lookout		0.00	
3,894.4	3,880.0	Mancos		0.00	
4,139.3	4,110.0	Gallup (MNCS. A)		0.00	
4,817.4	4,430.0	Gallup (TARGET)		0.00	




Enduring Resources LLC

Directional Drilling Plan
Plan View & Section View

Rodeo Unit 509H

San Juan Co., New Mexico
T23N-R09W-Sec.25-Lot H
Surface Latitude: 36.200941°N
Surface Longitude: 107.732970°W
Ground Level: 6883.0
Reference Elevation: KB @ 6905.0usft (Original Well Elev)

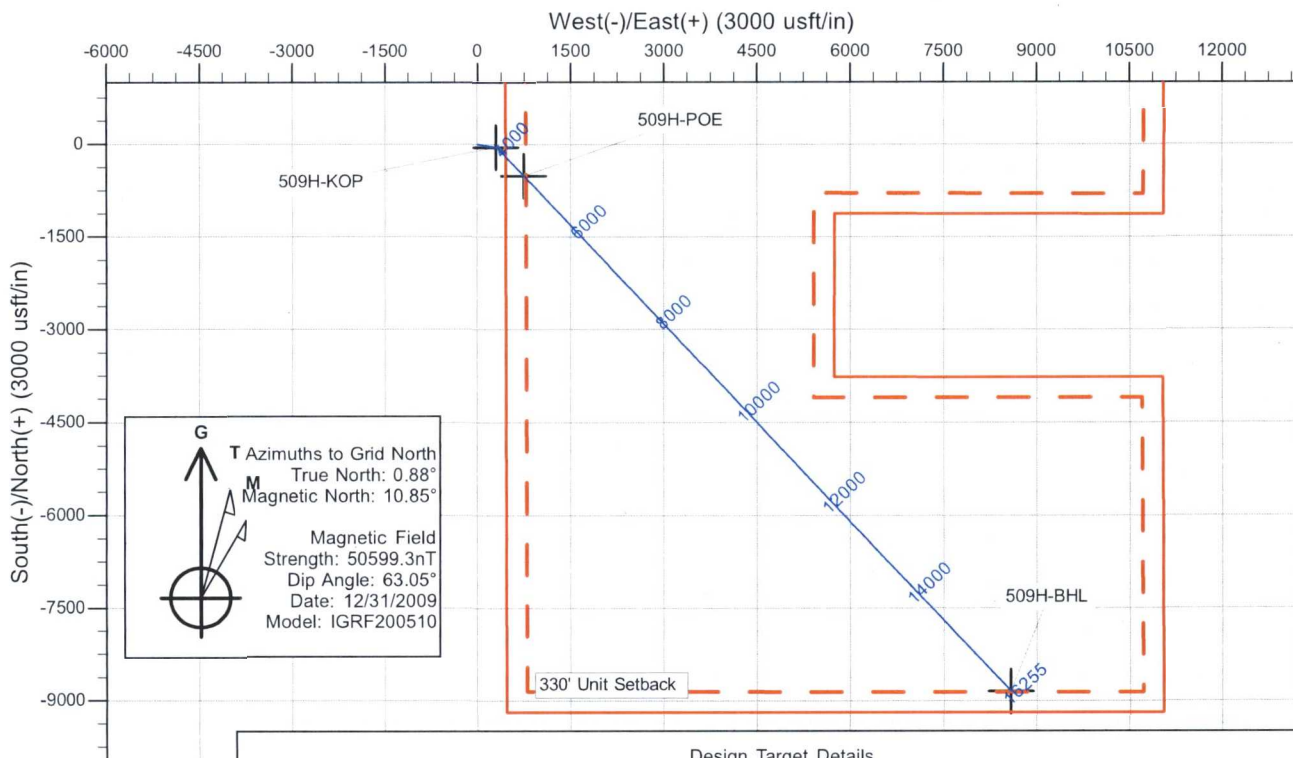


Design Target Details

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
509H-KOP	3850.0	-50.0	300.0	1895703.14	1203180.72	36.200816°N	107.731951°W
509H-BHL	4325.0	-8848.6	8579.0	1886904.51	1211459.70	36.176997°N	107.703452°W
509H-POE	4430.0	-512.5	749.2	1895240.65	1203629.90	36.199565°N	107.730405°W


Directional Drilling Plan Details

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	Vsect
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.0
220.0	0.00	0.00	220.0	0.0	0.0	0.00	0.0
500.0	0.00	0.00	500.0	0.0	0.0	0.00	0.0
770.2	5.40	99.46	769.8	-2.1	12.6	2.00	10.2
3864.2	5.40	99.46	3850.0	-50.0	300.0	0.00	244.7
4044.1	21.75	135.17	4024.5	-75.2	332.1	9.80	285.2
4817.4	90.53	136.79	4430.0	-512.5	749.2	8.89	889.4
16254.5	90.53	136.79	4325.0	-8848.6	8579.0	0.00	12324.7

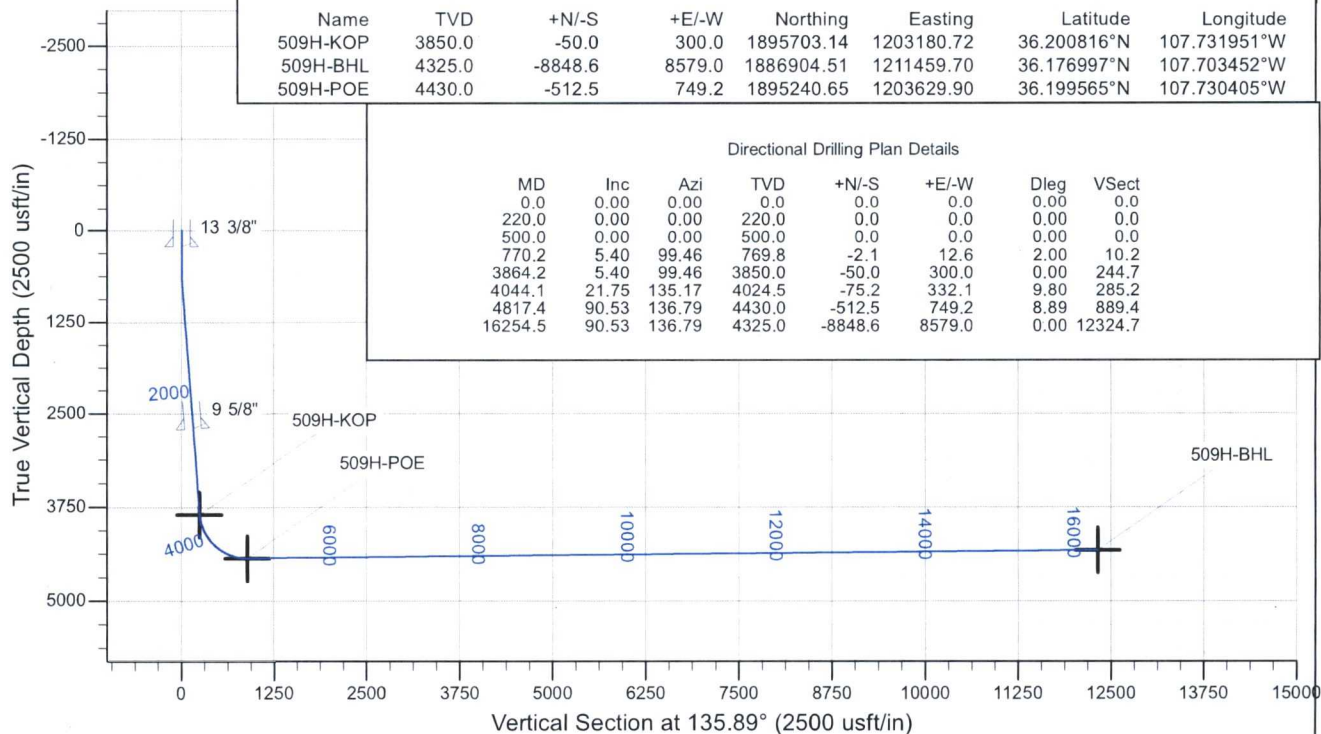


BOPE & CHOKE MANIFOLD DIAGRAMS

BOPE

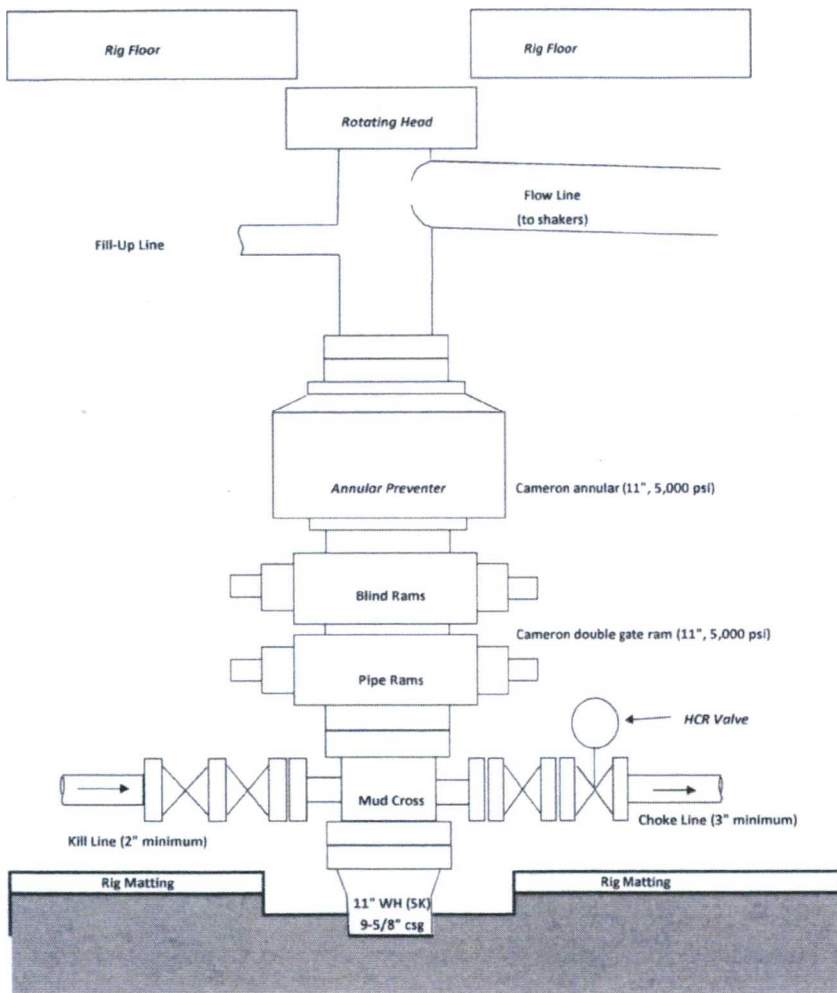

CHOKE MANIFOLD

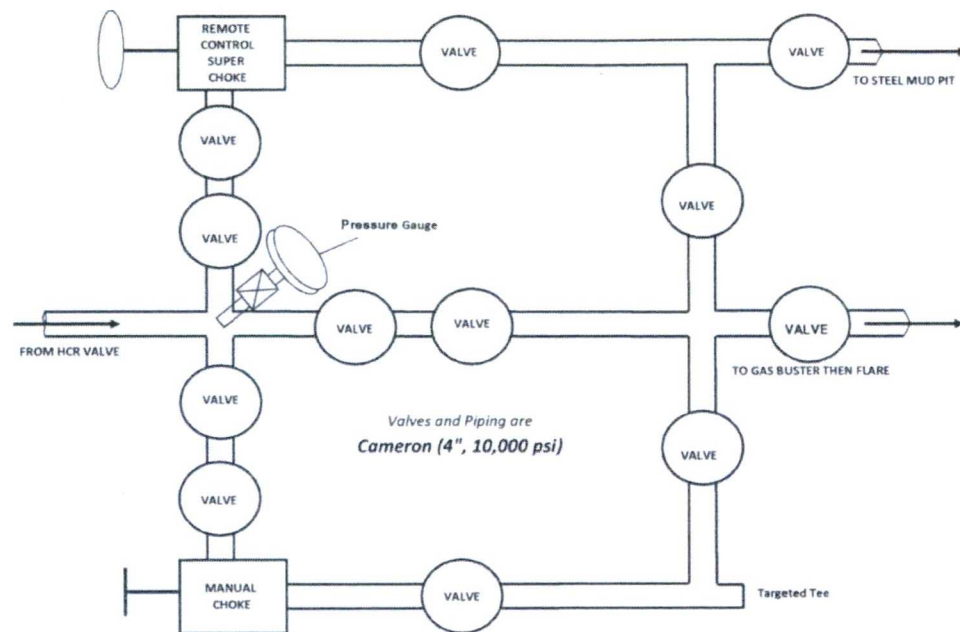

Directions from the Intersection of US Hwy 550 & US Hwy 64
in Bloomfield, NM to Enduring Resources, LLC Rodeo Unit 509H
1501' FNL & 426' FEL, Section 25, T23N, R9W, N.M.P.M., San Juan County, NM

Latitude: 36.200941°N Longitude: 107.732970°W Datum: NAD1983

From the intersection of US Hwy 550 & US Hwy 64 in Bloomfield, NM, travel Southerly on US Hwy 550 for 37.8 miles to Mile Marker 113.4;

Go Right (South-westerly) on County Road #7890 for 0.8 miles to fork in roadway;

Go Left (Southerly) remaining on County Road #7890 for 1.3 miles to four-way intersection;

Go Left (South-easterly) remaining on County Road #7890 for 0.6 miles to fork in roadway;

Go Right (South-westerly) remaining on County Road #7890 for 0.5 miles to begin proposed access on left-hand side which continues for 2169.7' to staked Enduring Rodeo Unit 509H location.