Form 3160-5 (June 2015)

UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 201


DUDEAU OF LAND MANAGEMENT					Expires, su	Tutter y	71, 2010	
BUREAU OF LAND MANAGEMENT SUNDRY NOTICES AND REPORTS ON WELLS					5. Lease Serial No. NMNM33025			
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.					6. If Indian, Allottee or Tribe Name			
SUBMIT IN TRIPLICATE - Other instructions on page 2					7. If Unit or CA/Agreement, Name and/or No.			
Type of Well ☐ Gas Well					8. Well Name and No. HUGH LAKE 91			
2. Name of Operator Contact: ALIPH REFNA					9. API Well No.			
DUGAN PRODUCTION COR	ction.com		30-045-33834-00-S1					
3a. Address 709 E MURRAY DRIVE FARMINGTON, NM 87499			(include area code) 5.1821		10. Field and Pool or Exploratory Area BASIN FRUITLAND COAL			
4. Location of Well (Footage, Sec., 7		11. County or Parish, State						
Sec 33 T27N R12W NWSE 1 36.530760 N Lat, 108.113866		SAN JUAN COUNTY, NM						
12. CHECK THE A	PPROPRIATE BOX(ES)	TO INDICA	TE NATURE OF	F NOTICE,	REPORT, OR OTH	ER D	OATA	
TYPE OF SUBMISSION	TYPE OF ACTION							
Notice of Intent	☐ Acidize	☐ Dee	pen	☐ Product	ion (Start/Resume)		Vater Shut-Off	
_	☐ Alter Casing	☐ Hyd	raulic Fracturing	□ Reclamation		■ Well Integrity		
☐ Subsequent Report	□ Casing Repair	■ New	Construction	☐ Recomp	olete		Other	
☐ Final Abandonment Notice	☐ Change Plans	and Abandon	on Temporarily Abandon					
h			g Back		Disposal			
13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection. Dugan Production Corp. plans to plug and abandon the well as per the following procedure: 1) Set CIBP @ 996'. Load hole. Pressure test casing to 600 psi. Circulate 3 bbls cement to surface during primary job. 2) Spot inside Plug I above BP @ 996' w/20 sx (23.6 cu ft) Class B w/2% CaCl2 cement to 872' (15.6#/gal, 1.18 cu ft/sk) - Fruitland, Plug I: 872'-996').								
 Spot Plug II below surface casing shoe @ 194' w/28 sx (33 cu ft) Class B cement w/2% CaCl surface (15.6#/gal, 1.18 cu ft/sk) - Kirtland-Ojo Alamo, surface, Plug II: 0-194'. 					2 to NHOCD			
4) Fill casing w/cement in case needed. Cut wellhead. 5) Install dry hole marker. Clean location.								
					AUG 1 6	201	8	
Notify NMOCD 24 hrs Prior to beginning operations					DISTRICT			
14. I hereby certify that the foregoing is	true and correct. Electronic Submission #- For DUGAN PRODU mmitted to AFMSS for proc	CTION CORP	RÁTION, sent to	the Farming	gton			
Name (Printed/Typed) ALIPH REENA			Title AGENT, ENGINEERING SUPERVISOR					
Signature (Electronic S	Submission)		Date 06/15/20)18				
	THIS SPACE FO	OR FEDERA			SE			
						$\overline{}$		
Approved By_JACK SAVAGE			TitlePETROLE	TitlePETROLEUM ENGINEER Date 08/14/2018			Date 08/14/2018	
Conditions of approval, if any, are attache certify that the applicant holds legal or equivalent would entitle the applicant to conduction.	Office Farmington							

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. (Instructions on page 2)
** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **



Current Wellbore Schematic

Hugh Lake # 91 30-045-33834, Basin Fruitland Coal 2300 FSL & 1720 FEL, NM33025 S33 T27N R12W, San Juan County

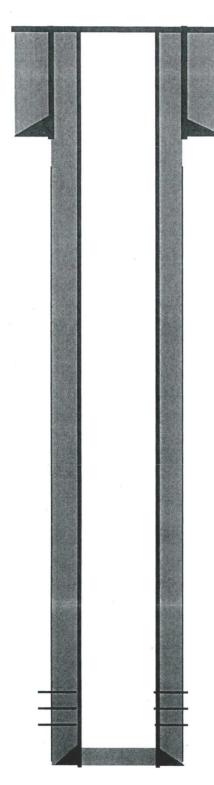

8-5/8" 24# casing @ 127'. Cemented with 95 sks Type 5 Cement. Hole size 12-1/4". 4 bbl Cement circulated to surface.

5 ½" 15.5 # casing @ 1479'. Hole size: 7"


Cement production casing w/ 85 sks Type 5 followed by 50 sks Type 5. Total Cement volume, 155 cu.ft. **3 bbls Cement circulated to surface.**

Fruitland Coal Perforated @ 1046' - 1293'

PBTD @ 1340', TD 1430'

Planned P & A Schematic

Hugh Lake # 91 30-045-33834, Basin Fruitland Coal 2300 FSL & 1720 FEL, NM33025 S33 T27N R12W, San Juan County

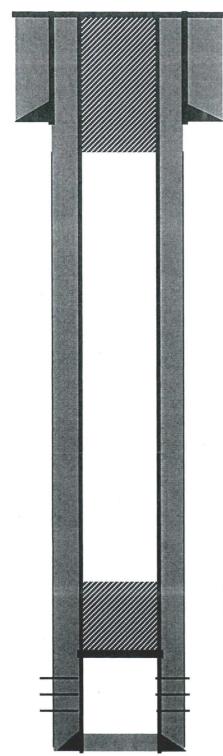

8-5/8" 24# casing @ 127'. Cemented with 95 sks Type 5 Cement. Hole size 12-1/4". 4 bbl Cement circulated to surface.

Spot plug from 194' to surface w/ 28 sks Class B Cement (33 cu.ft) (Plug II, Kirtland-Ojo Alamo-Surface, 0-194')

5 ½" 15.5 # casing @ 1479'. Hole size: 7"

Cement production casing w/ 85 sks Type 5 followed by 50 sks Type 5. Total Cement volume, 155 cu.ft. **3 bbls Cement circulated to surface.**

Set CIBP @ 996'. Set Inside Plug I with 20 sks (24 cu.ft) @ 872'-996' w/ Class B cement.(872'-996') (Plug I, Fruitland)

Fruitland Coal Perforated @ 1046' - 1293'

PBTD @ 1340', TD 1430'

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT FARMINGTON DISTRICT OFFICE

6251 COLLEGE BLVD. FARMINGTON, NEW MEXICO 87402

Attachment to notice of Intention to Abandon:

Re: Permanent Abandonment

Well: Hugh Lake 91

CONDITIONS OF APPROVAL

- 1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
- 2. Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 564-7750.
- 3. The following modifications to your plugging program are to be made:
 - a) Set Plug 2 (344 0) ft. to cover the Kirtland and Ojo Alamo tops. BLM picks top of Kirtland at 294 ft. BLM picks top of Ojo Alamo at 194 ft.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.