

CHACO 2408 32P 114H

API # 30-045-35441



Location

SHL: 1203' FSL 382' FEL Sec: 32 Twnshp: 24N Rge: 8W
 BHL: 2258' FSL 391' FWL Sec: 32 Twnshp: 24N Rge: 8W

Lat: 36.2669
 Long: -107.69751

Spud Date: 1/4/2013

Completion: 4/4/2013

Pool Name: Nageezi Gallup

GLV: 5/17/2015

Rod Pump: 3/27/2019

wellbore update: 4/10/13

Tops	MD	TVD
Ojo Alamo	1161'	1142'
Kirtland	1350'	1331'
Pictured Cliffs	1870'	1894'
Lewis	1970'	1955'
Chacra	2239'	2203'
Cliff House	3336'	3323'
Menefee	3374'	3385'
Point Lookout	4242'	4196'
Mancos	4452'	4448'
Gallup	4798'	4764'


HOLE SIZE	CASING	CEMENT	VOLUME	CMT TOP
12-1/4"	9-5/8"	240 sx	281 cu.ft.	*Surface
8-3/4"	7"	780 sx	177 cu.ft.	Not Reported
6-1/8"	4-1/2"	508 sx	562 cu.ft.	2900' (CBL)

Fraced/Perfed 6029'-10079'

Land tubing @ 5628' w/ 179 jnts 2-3/8", J-55, 4.7#

RIH WITH RODS, PICK UP AND RIHW 2 X 1 1/4 X
 14 RHBC ROD PUMP 26K SHEAR TOOL=8" 20-7/8
 4 PER 2" GUIDED RODS 128-3/4 4 PER 2"
 GUIDED RODS
 73-7/8 4 PER 2" GUIDED RODS 1-6' 7/8 PONY
 ROD 26 X 1 1/2 SPRAY METAL POLISH ROD .
 RDMO

8-3/4" pilot hole TD @ 6000'
 drilled for logs, Plugged back to
 4475'.

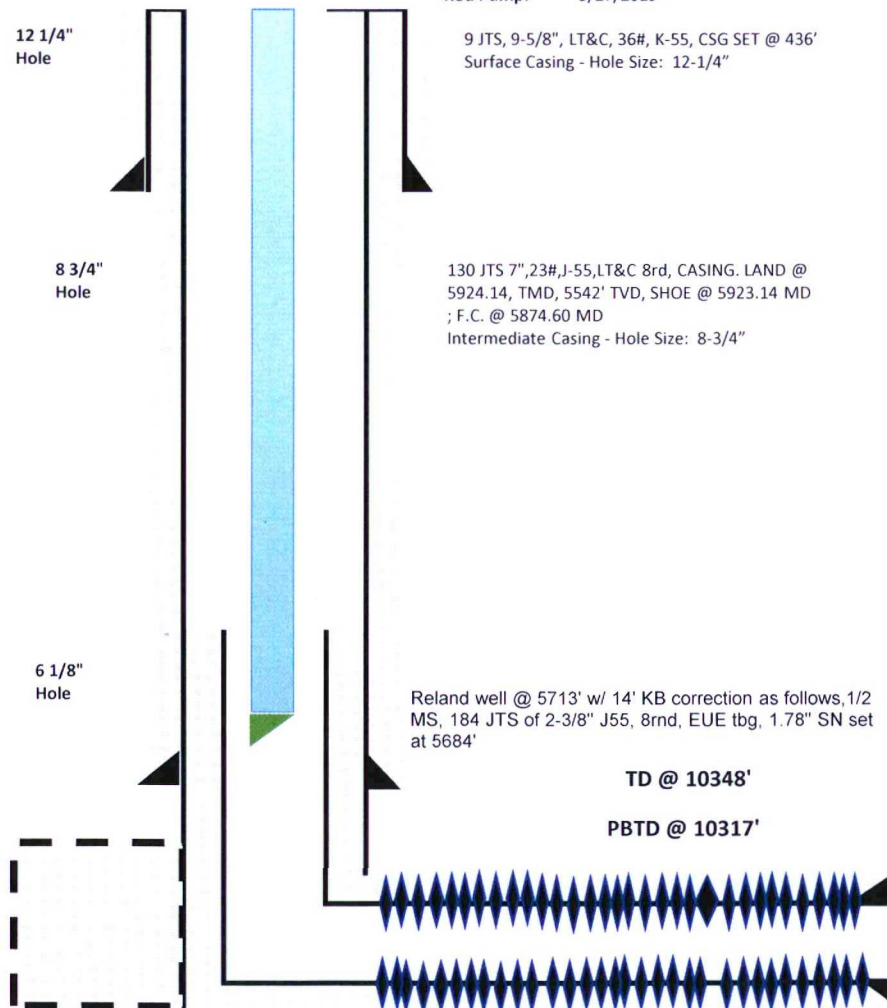

9 JTS, 9-5/8", LT&C, 36#, K-55, CSG SET @ 436'
 Surface Casing - Hole Size: 12-1/4"

130 JTS 7", 23#, J-55, LT&C 8rd, CASING. LAND @
 5924.14, TMD, 5542' TVD, SHOE @ 5923.14 MD
 ; F.C. @ 5874.60 MD
 Intermediate Casing - Hole Size: 8-3/4"

Reland well @ 5713' w/ 14' KB correction as follows, 1/2
 MS, 184 JTS of 2-3/8" J55, 8rnd, EUE tbg, 1.78" SN set
 at 5684'

TD @ 10348'

PBTD @ 10317'